



1.85 mm (M) Coaxial Matching Load, 0.5 Watt

Description:

Model STQ-CM-VM27-U2 is a metrology grade 1.85 mm (V) male coaxial matching load that covers the frequency range of DC to 67 GHz. The coaxial matching load exhibits a typical return loss of 25 dB. It is designed and manufactured to offer a good match for system applications. The characteristic impedance of the matching load is 50 Ohms and the power handling is 0.5 watt. The female version is available under the model number STQ-CM-VF27-U2.



Features:

- Instrumentation Grade
- High Return Loss
- 50 Ohms

Applications:

- Test Lab
- Sub-assemblies
- System Integration

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	DC		67 GHz
Return Loss		25 dB	
Impedance		50 Ω	
Power Handling			0.5 W (CW)
Specification Temperature		+25 °C	
Operating Temperature	-40 °C		+85 °C


Mechanical Specifications:

Item	Specification
Connector Type	1.85 mm (V) male
Material	Stainless Steel
Finish	Gold Plated
Weight	0.24 Oz
Length	0.76"
Outline	CM-VM-27-CE1




1.85 mm (M) Coaxial Matching Load, 0.5 Watt

Typical Return Loss vs. Frequency

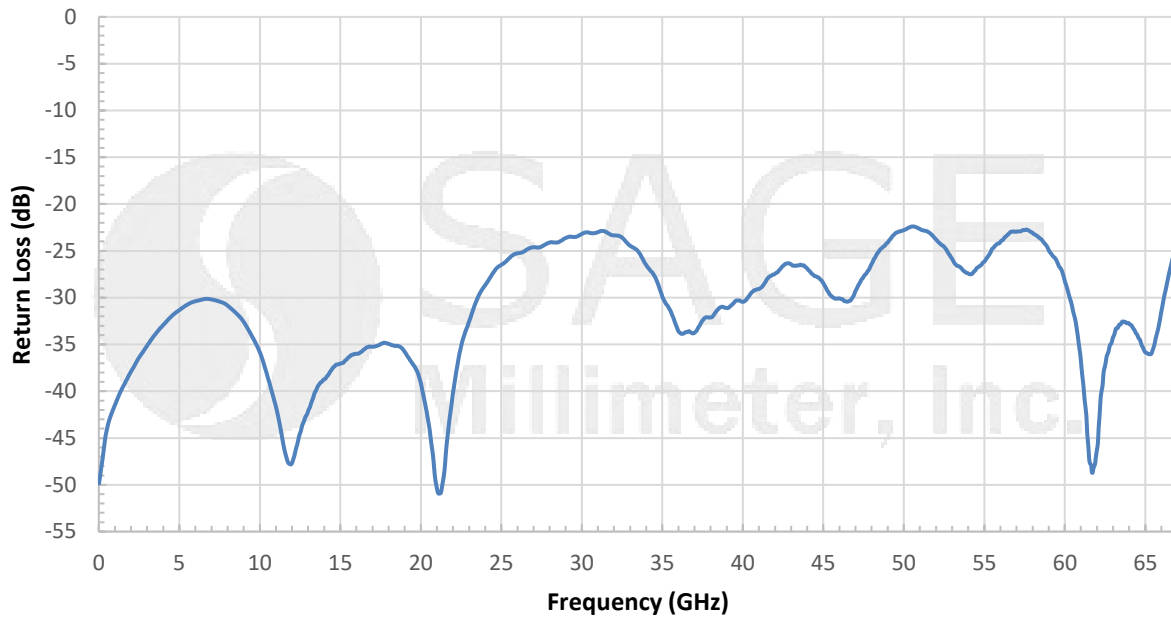

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

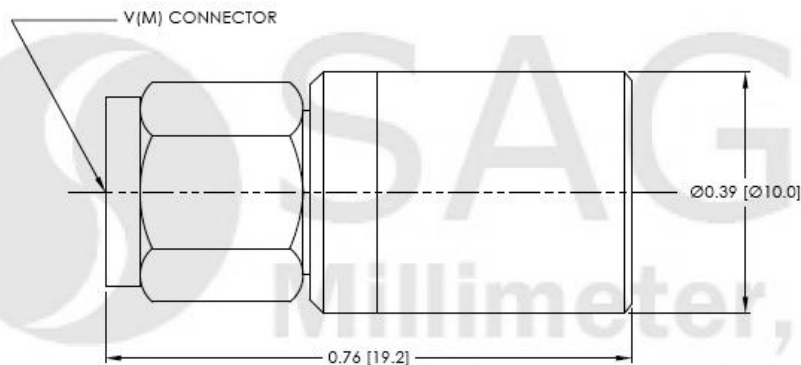

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit, slightly.
- All testing was performed under +25°C case temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Exceeding absolute maximum ratings shown will damage the device.
- Proper torque, 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-S1, is highly recommended.**

