

SWT-3412-LB

WR-34 to WR-12 Waveguide Taper Transition

Model SWT-3412-LB is a WR-34 to WR-12 waveguide taper transition. The taper transition is manufactured by either EDM machining or electro-forming techniques to ensure high accuracy and a quality surface finish. The taper transition only induces a fraction of a dB insertion loss and offers a return loss of 32 dB or better.



Mechanical Specifications:

Item	Specification
Waveguide Size	WR-34 Waveguide with UG-1530/U Flange
Waveguide Size	WR-12 Waveguide with UG-387/U Anti-Cocking Flange
Material	Brass
Finish	Gold Plated
Weight	0.8 Oz
Insertion Length	2"
Outline	WT-3E-A

ECCN

EAR99

FEATURES

- Rugged Waveguide Configuration
- Low Insertion Loss
- Instrumentation Grade

APPLICATIONS

- Test Labs
- Test Instrumentation
- Sub-Assemblies


SUPPLEMENTAL DETAILS



SWT-3412-LB

Mechanical Outline:

Unless otherwise specified, all dimensions are in inches [millimeters]

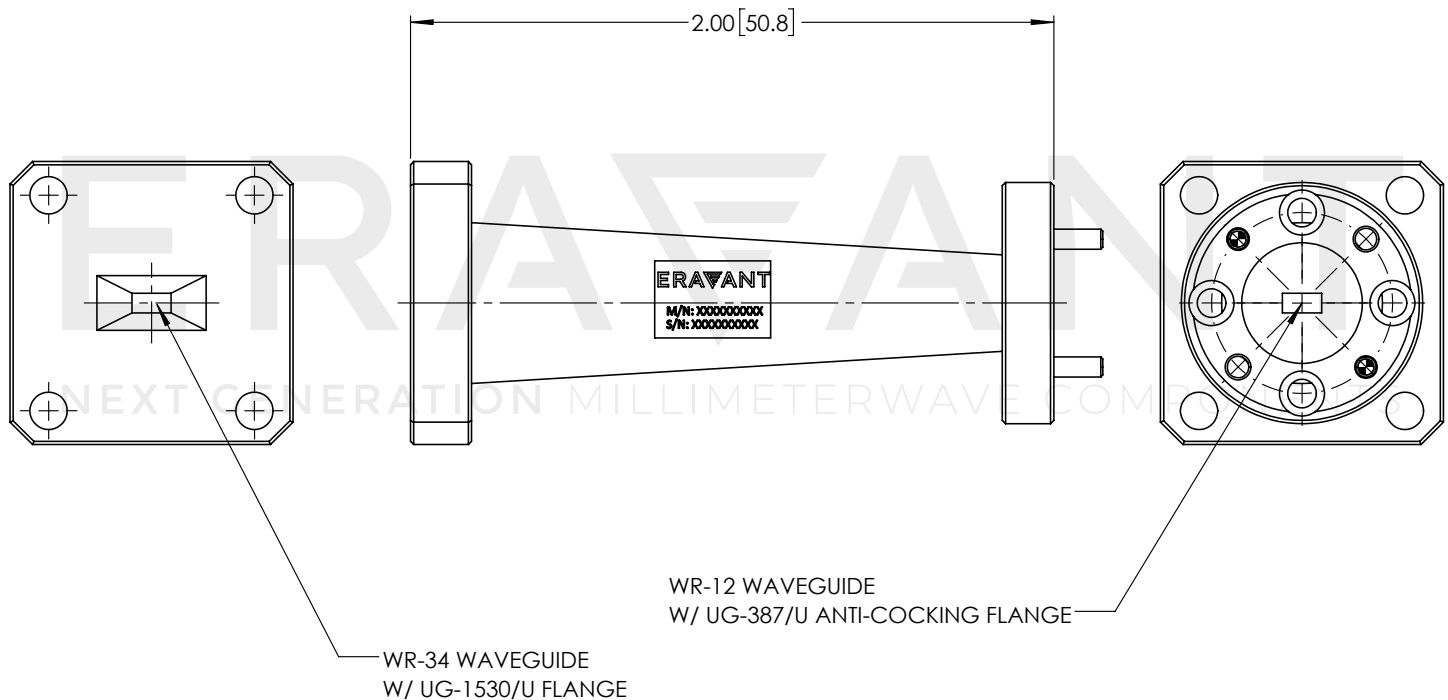

NOTE:

- On condition that test data is provided it is collected from a sample lot. Actual data may vary slightly from unit to unit. All testing is performed under +25 °C room temperature.
- On condition that simulated test data is provided, actual measured data may slightly vary.
- Eravant reserves the right to change the information presented without notice.

CAUTION:

- If a waveguide is present, any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.
- For 1 mm connectors proper torque should be applied: 4.0 ± 0.15 inch-pounds (0.45 ± 0.02 Nm). Torque wrench model [SCH-06004-S1](#) is highly recommended.
- For 1.35 mm, 1.85 mm, 2.4 mm, 2.92 mm, and SMA connectors proper torque should be applied: 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm). Torque wrench model [SCH-08008-S1](#) is highly recommended.