

## SWT-4210-LB

## WR-42 to WR-10 Waveguide Taper Transition

**Model SWT-4210-LB** is a WR-42 to WR-10 waveguide taper transition. The taper transition is manufactured by either EDM machining or electro-forming techniques to ensure high accuracy and a quality surface finish. The taper transition only induces a fraction of a dB insertion loss and offers a return loss of 32 dB or better.



## Mechanical Specifications:

Item	Specification
Waveguide Size	WR-42 Waveguide with UG-595/U Flange
Waveguide Size	WR-10 Waveguide with UG-387/U-M Anti-Cocking Flange
Material	Brass
Finish	Gold Plated
Weight	2.6 Oz
Insertion Length	3.5"
Outline	WT-KW

## ECCN

EAR99

## FEATURES

- Rugged Waveguide Configuration
- Low Insertion Loss
- Instrumentation Grade

## APPLICATIONS

- Test Labs
- Test Instrumentation
- Sub-Assemblies


## SUPPLEMENTAL DETAILS



## SWT-4210-LB

### Mechanical Outline:

Unless otherwise specified, all dimensions are in inches [millimeters]

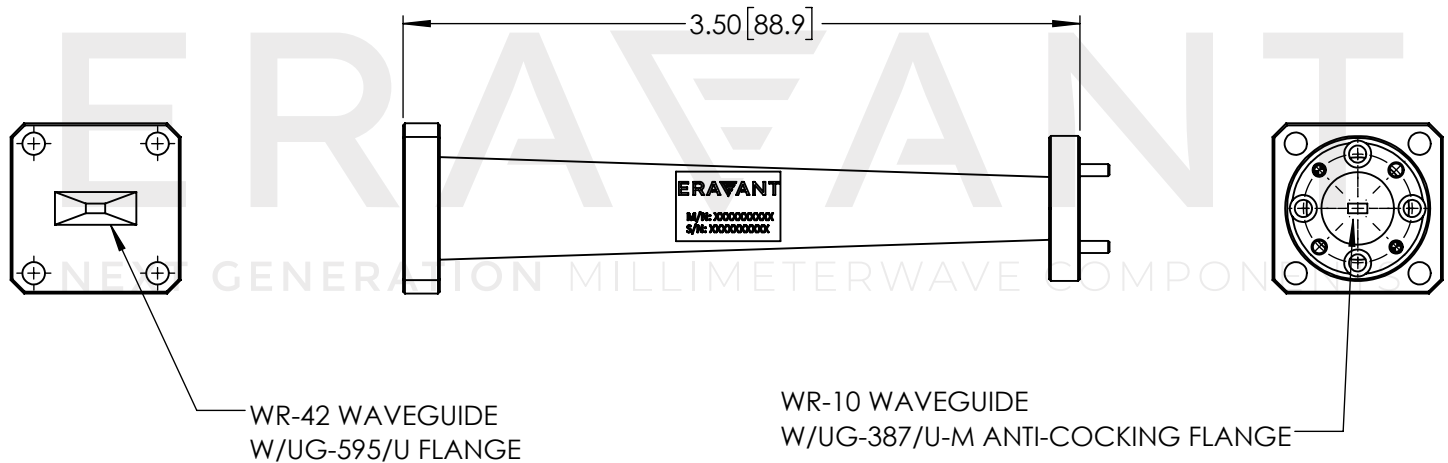

### NOTE:

- On condition that test data is provided it is collected from a sample lot. Actual data may vary slightly from unit to unit. All testing is performed under +25 °C room temperature.
- On condition that simulated test data is provided, actual measured data may slightly vary.
- Eravant reserves the right to change the information presented without notice.

### CAUTION:

- If a waveguide is present, any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.
- For 1 mm connectors proper torque should be applied:  $4.0 \pm 0.15$  inch-pounds ( $0.45 \pm 0.02$  Nm). Torque wrench model [SCH-06004-S1](#) is highly recommended.
- For 1.35 mm, 1.85 mm, 2.4 mm, 2.92 mm, and SMA connectors proper torque should be applied:  $8.0 \pm 0.15$  inch-pounds ( $0.90 \pm 0.02$  Nm). Torque wrench model [SCH-08008-S1](#) is highly recommended.