

## WR-62 to Circular Waveguide Mode Transition, 0.688" Diameter

### Description:

**Model SWT-62688-SA** is a WR-62 to 0.688" diameter circular waveguide mode transition. The mode transition is manufactured by either EDM machining or electro-forming techniques to ensure high accuracy and a quality surface finish. The transition only induces a fraction of a dB insertion loss and offers a return loss of 32 dB or better. The nominal operating frequency is 12.4 to 15.9 GHz. The dominate mode frequency range can be extended to cover 12.0 to 18.0 GHz, if the dominate mode operation is maintained.



### Features:

- Rugged Waveguide Configuration
- Low Insertion Loss
- Instrumentation Grade


### Applications:

- Test Labs
- Test Instrumentation
- Sub-assemblies

### Mechanical Specifications:

Item	Specification
Waveguide Size	WR-62 Waveguide with UG-419/U Flange
Waveguide Size	0.688" Diameter Circular Waveguide with UG-419/U-M Flange
Material	Aluminum
Finishing	Silver Plated (Inner), Black Paint (Outer)
Weight	3.5 Oz
Insertion Length	3.0"
Outline	WT-6C-L

**Mechanical Outline:** (Unless otherwise specified, all dimensions are in inches)

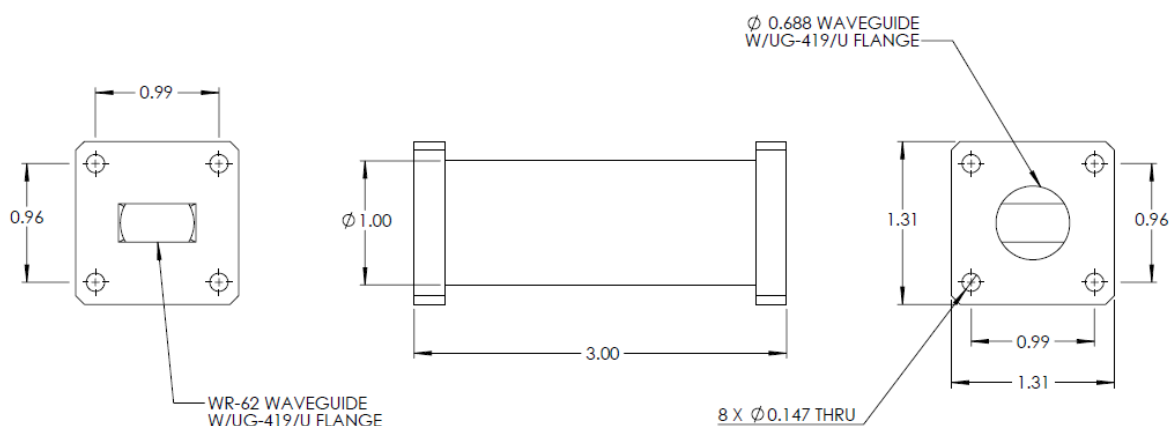

### Note:

- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.



www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505  
Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com