

## Waveguide Crossguide Coupler, D Band, 20 dB

**SWX-11417420-06-4B** is a four-port, split block crossguide coupler that is offered for power sampling where directivity is of no concern. Compared to a multi-hole directional coupler, crossguide couplers offer lower insertion loss and a smaller form factor and insertion length. This model operates between 110 to 170 GHz with a 20 dB typical coupling level and 1.4 dB nominal insertion. The input, output, and coupled ports are all WR-06 waveguides with UG-387/U-M anti-cocking flanges.



### Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	110 GHz		170 GHz
Insertion Loss*		1.4 dB	
Coupling		20 dB	
Directivity		20 dB	
Return Loss		18 dB	
Specification Temperature		+25°C	
Operating Temperature	-40°C		+85°C

\*Performance may be reduced at band edges.

### Mechanical Specifications:

Item	Specification
Waveguide Ports	WR-06 Waveguide with UG-387/U-M Anti-Cocking Flange
Material	Aluminum
Finish	Gold Plated
Weight	0.9 Oz
Outline	WX-BD-4-F4-A

### ECCN

EAR99

### FEATURES

- Full Band Operation
- Low Insertion Loss
- Moderate Directivity
- Four Port Configuration


### APPLICATIONS

- Test Labs
- Instrumentations
- Sub-assemblies


### SUPPLEMENTAL DETAILS



### Typical Performance Vs. Frequency

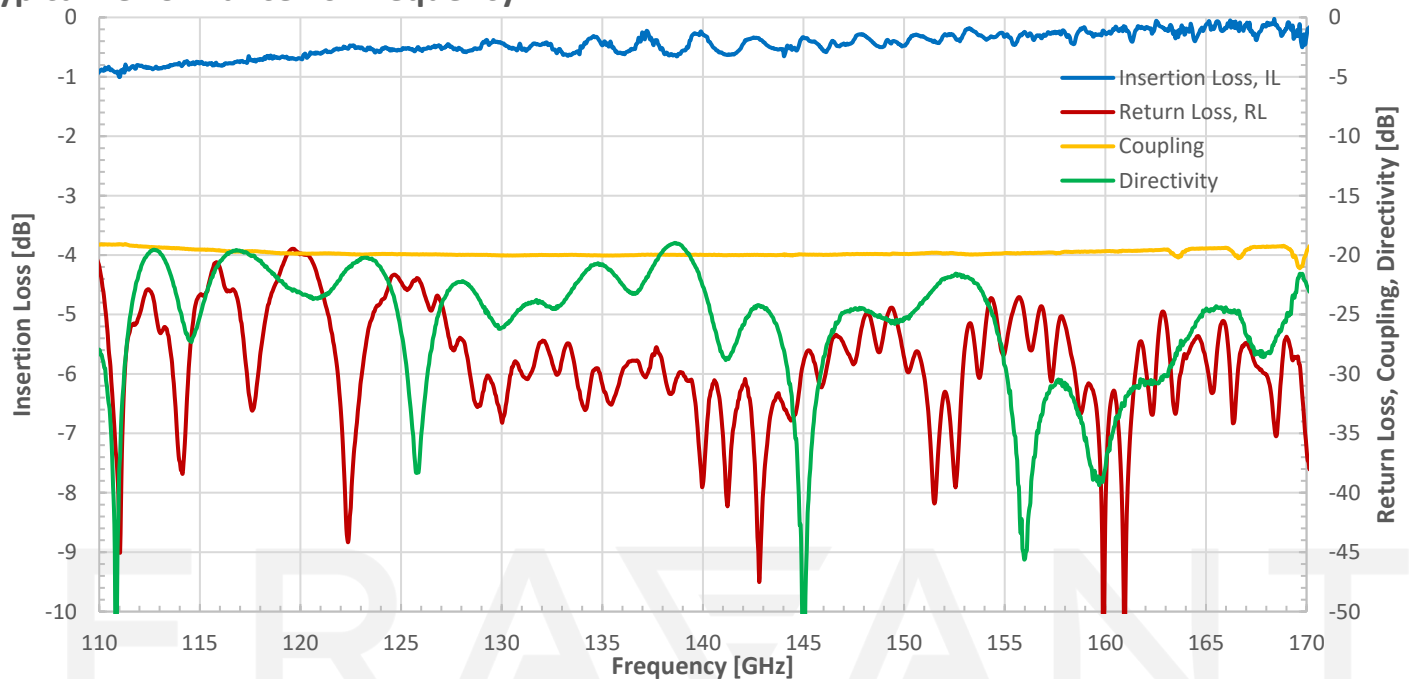

**Mechanical Outline:** Unless otherwise specified, all dimensions are in inches [millimeters]

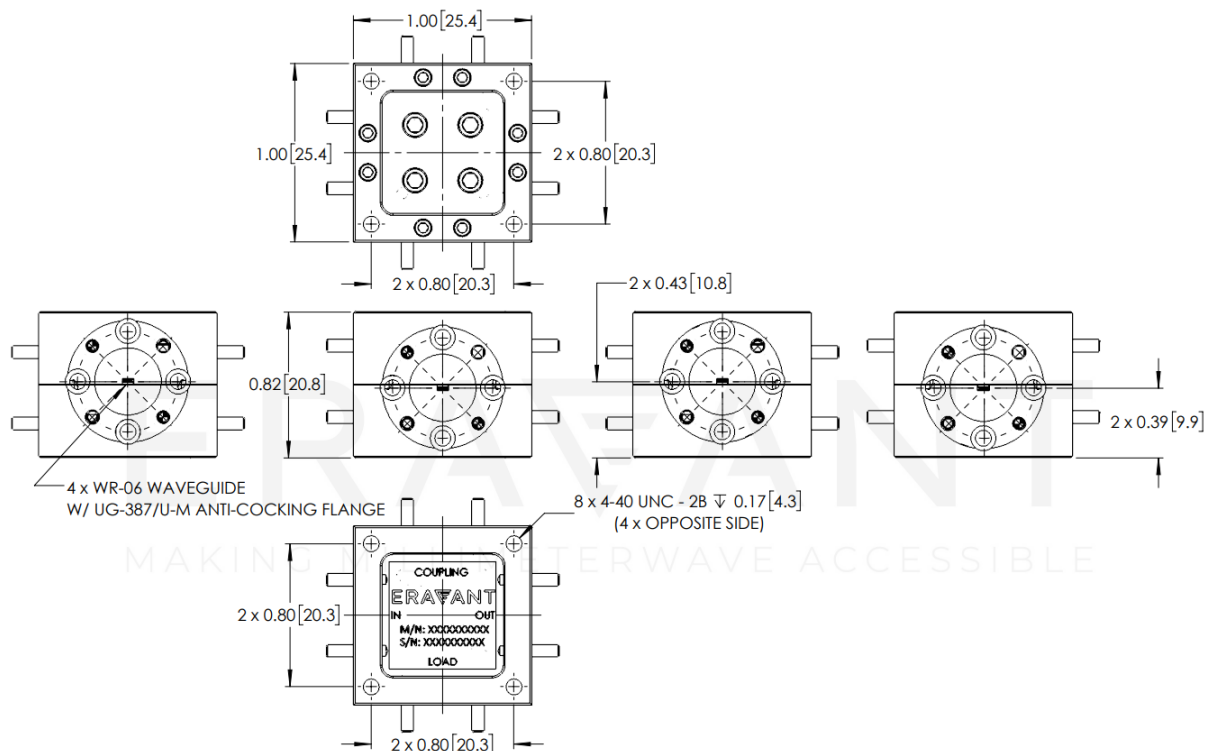

**NOTE:**

- On condition that test data is provided it is collected from a sample lot. Actual data may vary slightly from unit to unit. All testing is performed under +25 °C room temperature.
- On condition that simulated test data is provided, actual measured data may slightly vary.
- Eravant reserves the right to change the information presented without notice.

**CAUTION:**

- If a waveguide is present, any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.

ERAVANT  
MAKING MILLIMETERWAVE ACCESSIBLE

ERAVANT  
MAKING MILLIMETERWAVE ACCESSIBLE