

STQ-CS-KF-U2

2.92 mm (K) Coaxial Short, Female Connector

STQ-CS-KF-U2 is a metrology grade 2.92 mm (K) female short that covers the frequency range of DC to 40 GHz. The coaxial short exhibits a typical VSWR higher 20:1. It is designed and manufactured to offer a good short for system applications. The male version is available under the model number STQ-CS-KM-U2.



Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	DC		40 GHz
VSWR	20:1		
Operating Temperature	-40 °C		+85 °C

Mechanical Specifications:

Item	Specification
Connector Type	2.92 mm (K) Female
Material	Stainless Steel
Finish	Gold Plated
Weight	0.36 Oz
Length	0.74"
Outline	CR-KF-27-CE1

ECCN

EAR99

FEATURES

- Instrumentation Grade
- High VSWR

APPLICATIONS


- Test Lab
- Sub-assemblies
- System Integration

SUPPLEMENTAL DETAILS



STQ-CS-KF-U2

Mechanical Outline: Unless otherwise specified, all dimensions are in inches [millimeters]

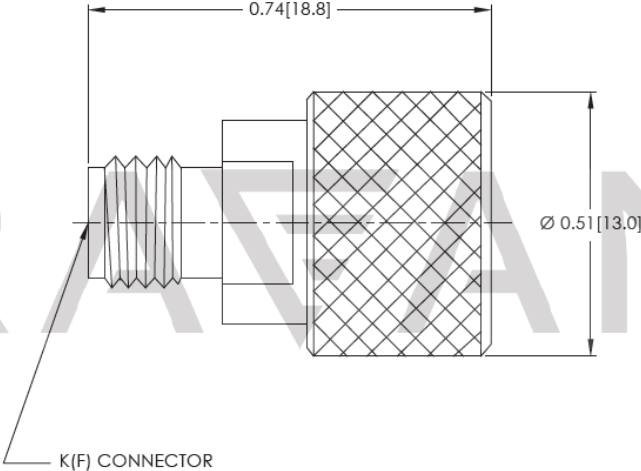

NOTE:

- On condition that test data is provided it is collected from a sample lot. Actual data may vary slightly from unit to unit. All testing is performed under +25 °C room temperature.
- On condition that simulated test data is provided, actual measured data may slightly vary.
- Eravant reserves the right to change the information presented without notice.

CAUTION:

- Proper torque, 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm), should be applied. **Eravant torque wrench, model SCH-08008-S1, is highly recommended.**