#### 1/4

#### Ka-Band Low Noise Amplifier, 24 to 42 GHz, 30 dB Gain, 3.5 dB NF

SBL-2434233035-28KF-E1 is a low noise amplifier with a typical small signal gain of 30 dB and a nominal noise figure of 3.5 dB across the frequency range of 24 to 42 GHz. The DC power requirement for the amplifier is +8 VDC/550 mA. The RF connectors are a WR-28 Uni-Guide<sup>™</sup> waveguides and a 2.92mm (K) Female connector. Other port configurations for either the input or output port, are also available under different model numbers.

#### **Electrical Specifications:**

| Parameter                 | Minimum | Typical | Maximum |
|---------------------------|---------|---------|---------|
| Frequency                 | 24 GHz  |         | 42 GHz  |
| Gain                      |         | 30 dB   |         |
| Noise Figure              |         | 3.5 dB  |         |
| P1dB                      |         | +20 dBm |         |
| Pin                       |         |         | +2 dBm  |
| Input Return Loss         |         | 5 dB    |         |
| Output Return Loss        |         | 10 dB   |         |
| DC Voltage                | +6 VDC  | +8 VDC  | +15 VDC |
| DC Supply Current         |         | 550 mA  |         |
| Specification Temperature |         | +25 °C  |         |
| Operating Temperature     | 0 °C    |         | +50 °C  |

#### **Mechanical Specifications:**

Copyright © 2023 by Eravant

| Item          | Specification   |  |  |
|---------------|---|--|--|
| Input Port    | WR-28 Uni-Guide™ Waveguide with UG-599/U<br>Compatible Flange |  |  |
| Output Port   | 2.92 mm (K) Female Connector                                  |  |  |
| Bias          | Solder Pin  |  |  |
| Case Material | Aluminum  |  |  |
| Finish        | Gold Plated   |  |  |
| Weight        | 2.0 Oz  |  |  |
| Outline       | BG-SA-2WC   |  |  |
|               |   |  |  |



#### ECCN

EAR99

#### **FEATURES**

- Full Waveguide Band Coverage
- State-of-the-Art Noise Figure
- Good Gain Flatness
- High Output P1dB

#### **APPLICATIONS**

- 5G Systems ٠
- Radar Systems
- **Communication Systems**
- Low Noise Receivers

#### SUPPLEMENTAL DETAILS




### ERAWANT

### SBL-2434233035-28KF-E1


## ERA\ANT

#### Gain and Return Loss vs. Frequency

Bias: +8 V<sub>DC</sub>/568 mA

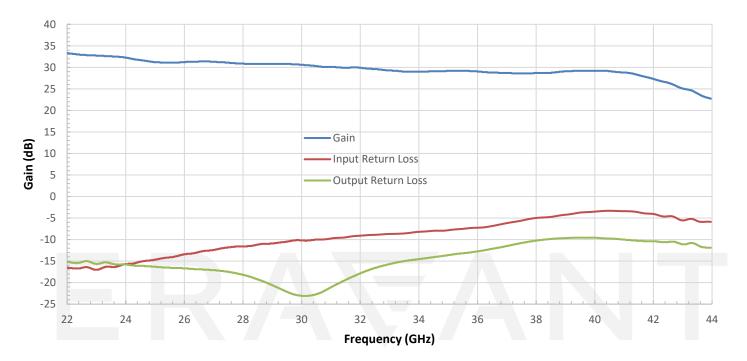


## **Noise Figure vs. Frequency**

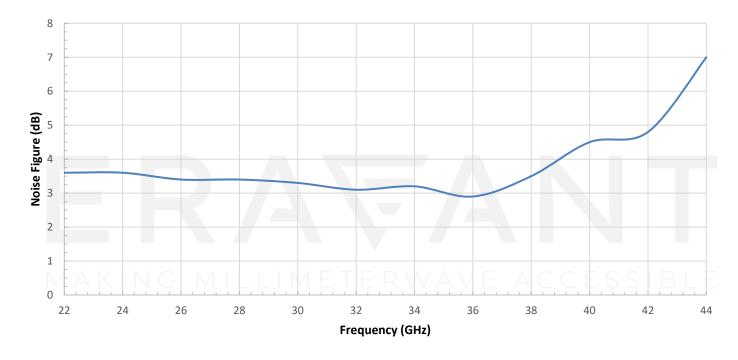


#### SBL-2434233035-28KF-E1

## ERA\ANT

#### P1dB vs. Frequency

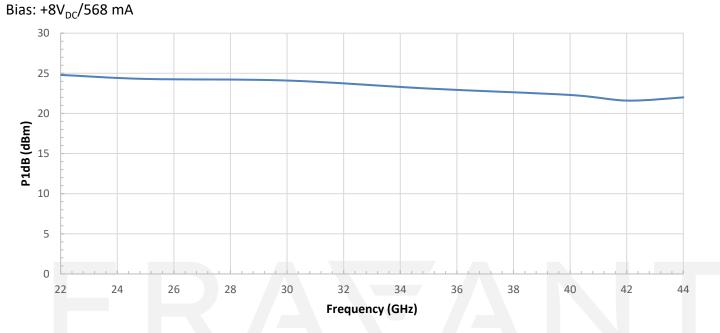

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

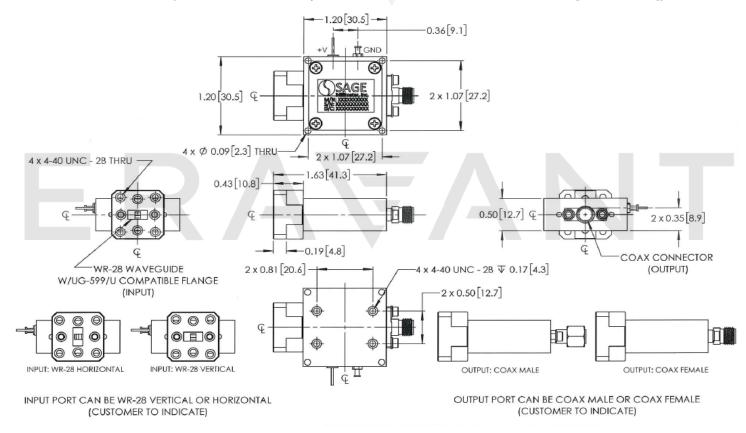

www.eravant.com | 424-757-0168 | support@eravant.com Copyright © 2023 by Eravant

Advanced Rev 1.1

## ERA\ANT

#### NOTE:

- The amplifier employs Eravant's trademarked and patent pending technology, Uni-Guide™, as its waveguide interfaces. The orientation of the input and the output waveguides can be specified through corresponding model numbers.
- Other mechanical configurations are available under different model numbers.
- Eravant reserves the right to change the information presented without notice.

#### CAUTION:

- Exceeding absolute maximum ratings shown will damage the device.
- Exceeding the maximum bias voltage of +15 VDC will cause amplifier overheating and result the instability.
- The device is static sensitive. Always follow ESD rules when working with the device.
- The case temperature of the device shall never exceed +50 °C. Use proper heatsink or fan if necessary.
- Any foreign objects in the waveguide will cause performance degradation and may damage the device.

# ERAFANT MAKING MILLIMETERWAVE ACCESSIBLE

## ERAFANT MAKING MILLIMETERWAVE ACCESSIBLE