

## WR-15 to WR-12 Waveguide Taper Transition, Anti-Cocking Flanges

### Description:

**Model SWT-1512-LB-A** is a WR-15 to WR-12 rectangular waveguide taper transition. The taper transition is manufactured by either EDM machining or electro-forming techniques to ensure high accuracy and a quality surface finish. The transition is also designed with anti-cocking flanges to enhance waveguide interface contact and reduce leakage. The transition only induces a fraction of a dB insertion loss and offers a VSWR of 1.05:1 or better.



### Features:

- Rugged Waveguide Configuration
- Low Insertion Loss
- Instrumentation Grade
- Anti-Cocking Flange


### Applications:

- Test Labs
- Test Instrumentation
- Sub-assemblies

### Mechanical Specifications:

Item	Parameter
Waveguide Size	WR-15 Waveguide with Anti-Cocking UG-385/U Flange
Waveguide Size	WR-12 Waveguide with Anti-Cocking UG-387/U Flange
Insertion Length	1.0"
Outline	WT-VE-A
Material	Brass
Finish	Gold Plated
Weight	0.8 Oz

### Mechanical Outline: (Unless otherwise specified, all dimensions are in inches)

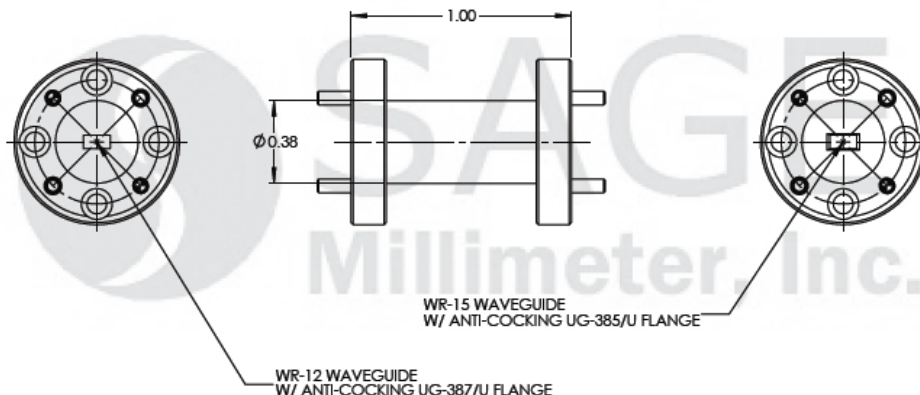

### Note:

- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.



www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505  
 Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com