

STQ-CW-KMKM060-F2-PS-2

2.92 mm (M) to 2.92 mm (M) Coaxial Cable, Flexible, Armored, Phase Stable, 60"

STQ-CW-KMKM060-F2-PS-2 is a 60" long, flexible, phase stable, armored coaxial cable with 2.92 mm male connectors that cover the frequency range of DC to 40 GHz. The typical amplitude and phase stabilities at 40 GHz are ± 0.08 dB and $\pm 6^\circ$ at a bending radius of 2.25", respectively. The coaxial cable utilizes the highest quality test instrumentation grade cable and a precision manufacturing process to guarantee superior microwave performance and mechanical durability. The impedance of the cable is 50 ohms. Other lengths are offered under different models.



Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency Range	DC		40 GHz
Insertion Loss @ 18 GHz		< 3.1 dB	
Insertion Loss @ 26.5 GHz		< 3.7 dB	
Insertion Loss @ 32 GHz		< 4.3 dB	
Insertion Loss @ 40 GHz		< 4.8 dB	
Return Loss @ 40 GHz		19 dB	
Phase Stability*		$\pm 6^\circ$	
Amplitude Stability*		± 0.08 dB	
Impedance		50 Ω	
Radiation Shielding	90 dB	100 dB	
Power Handling @ 40 GHz			20 W (CW)
Specification Temperature		+25 $^\circ\text{C}$	
Operating Temperature	-40 $^\circ\text{C}$		+85 $^\circ\text{C}$

*When cable is wrapped 360° around a 2.25" (57 mm) radius mandrel.

ECCN

EAR99

FEATURES

- High Performance
- Phase Stable
- Armored
- Flexible
- Stable and Reliable

APPLICATIONS

- Test Lab
- VNA
- Microwave Anechoic Chambers
- Antenna Ranges

SUPPLEMENTAL DETAILS




STQ-CW-KMKM060-F2-PS-2

Mechanical Specifications:


Item	Specification
Connectors	2.92 mm Male
Connector Contact Material	Be-Cu / Gold Plating per MIL-G-45204
Connector Material	Passivated Stainless Steel
Connector Dielectric	PEI
Cable Dielectric	ePTFE
Inner / Outer Cable Jacket Material	FEP / Stainless Steel Braid and PTFE
Cable Outer Diameter	0.240"
Length	60"
Minimum Bending Radius	1.25"
Outline	CW-KK-F10-A-V

Typical Performance vs. Frequency

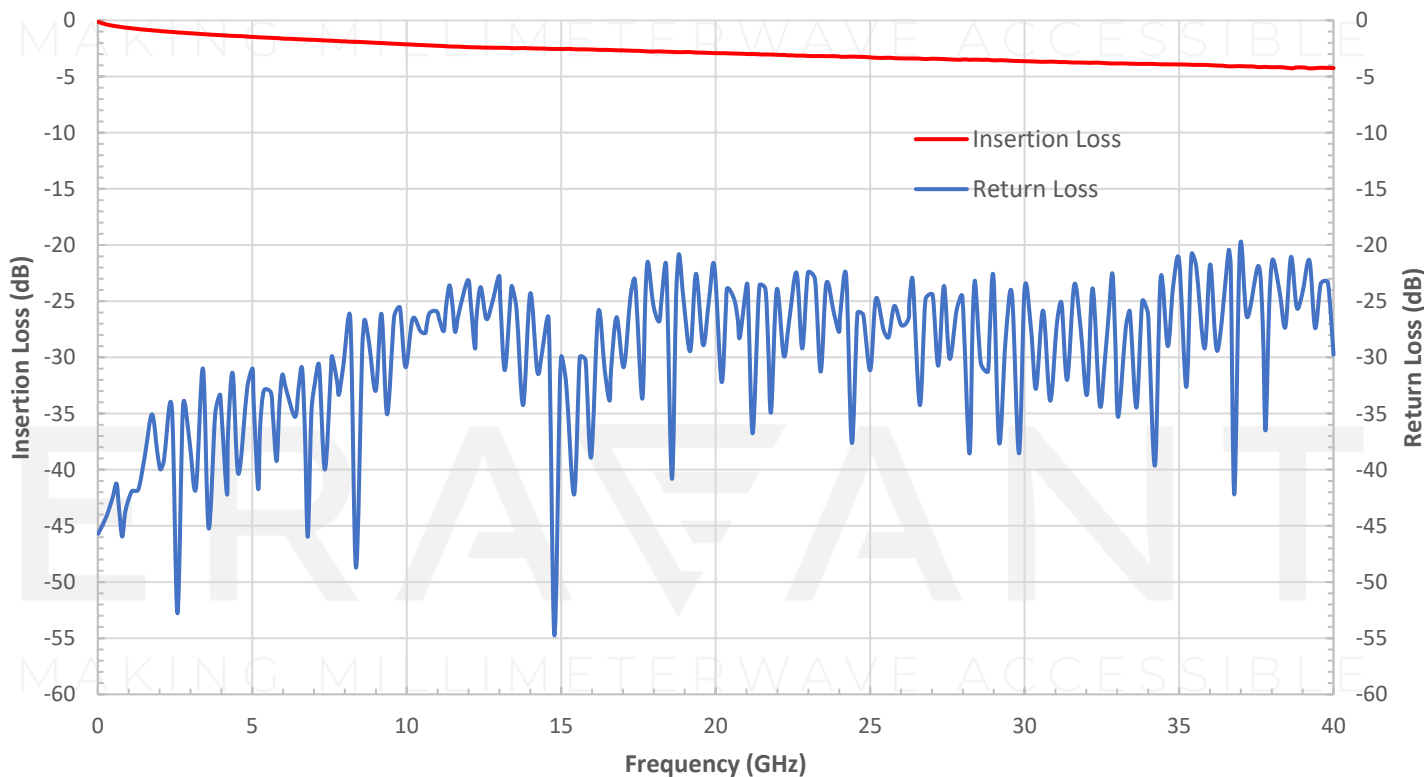

STQ-CW-KMKM060-F2-PS-2

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

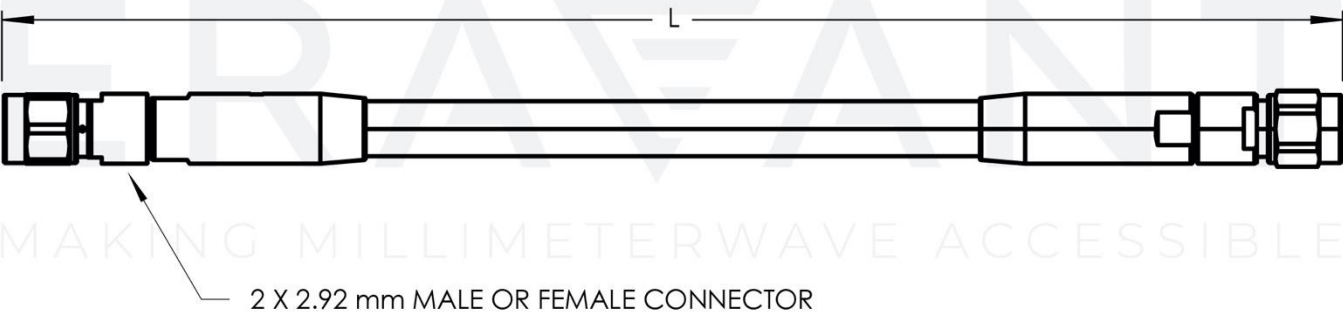

NOTE:

LENGTH "L" IS CUSTOMIZABLE

NOTE:

- Length "L" can be customizable.
- All data presented is collected from a sample lot. Actual data may vary slightly from unit to unit.
- All testing is performed under +25 °C case temperature.
- Eravant reserves the right to change the information presented without notice.

CAUTION:

- Bending the cable sharply will either cause damage or degrade the performance of the cable.
- Proper torque should be applied: 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm). Torque wrench model [SCH-08008-S1](#) is highly recommended.