

STQ-CW-SMSM012-F2-PS

SMA (M) to SMA (M) Coaxial Cable, Flexible, Armored, Phase Stable, 12"

STQ-CW-SMSM012-F2-PS is a 12" long, flexible, phase stable, armored coaxial cable with SMA male connectors that cover the frequency range of DC to 18 GHz. The typical amplitude and phase stabilities at 18 GHz are ± 0.05 dB and $\pm 3^\circ$ at a bending radius of 2.25", respectively. The coaxial cable utilizes the highest quality test instrumentation grade cable and a precision manufacturing process to guarantee superior microwave performance and mechanical durability. The impedance of the cable is 50 ohms. Other lengths are offered under different models.



Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency Range	DC		18 GHz
Insertion Loss @ 3 GHz		0.5 dB	
Insertion Loss @ 6 GHz		0.6 dB	
Insertion Loss @ 12 GHz		0.7 dB	
Insertion Loss @ 18 GHz		0.9 dB	
Return Loss		19 dB	
Phase Stability*		$\pm 3^\circ$	
Amplitude Stability*		± 0.05 dB	
Impedance		50 Ω	
Radiation Shielding		100 dB	
Specification Temperature		+25 $^\circ\text{C}$	
Operating Temperature	-55 $^\circ\text{C}$		+125 $^\circ\text{C}$

*When cable is wrapped 360° around a 2.25" (57 mm) radius mandrel.

ECCN

EAR99

FEATURES

- High Performance
- Phase Stable
- Armored
- Flexible
- Stable and Reliable

APPLICATIONS

- Test Lab
- VNA
- Microwave Anechoic Chambers
- Antenna Ranges

SUPPLEMENTAL DETAILS




STQ-CW-SMSM012-F2-PS

Mechanical Specifications:


Item	Specification
Connectors	SMA Male
Connector Contact Material	Brass / Gold Plating per MIL-G-45204
Connector Material	Passivated Stainless Steel
Connector Dielectric	PTFE
Cable Dielectric	ePTFE
Inner / Outer Cable Jacket Material	Braided Strength Member / Braided Jacket
Cable Outer Diameter	0.210"
Length	12"
Minimum Bending Radius	1.0"
Outline	CW-SS-F10-A-PS

Typical Performance vs. Frequency

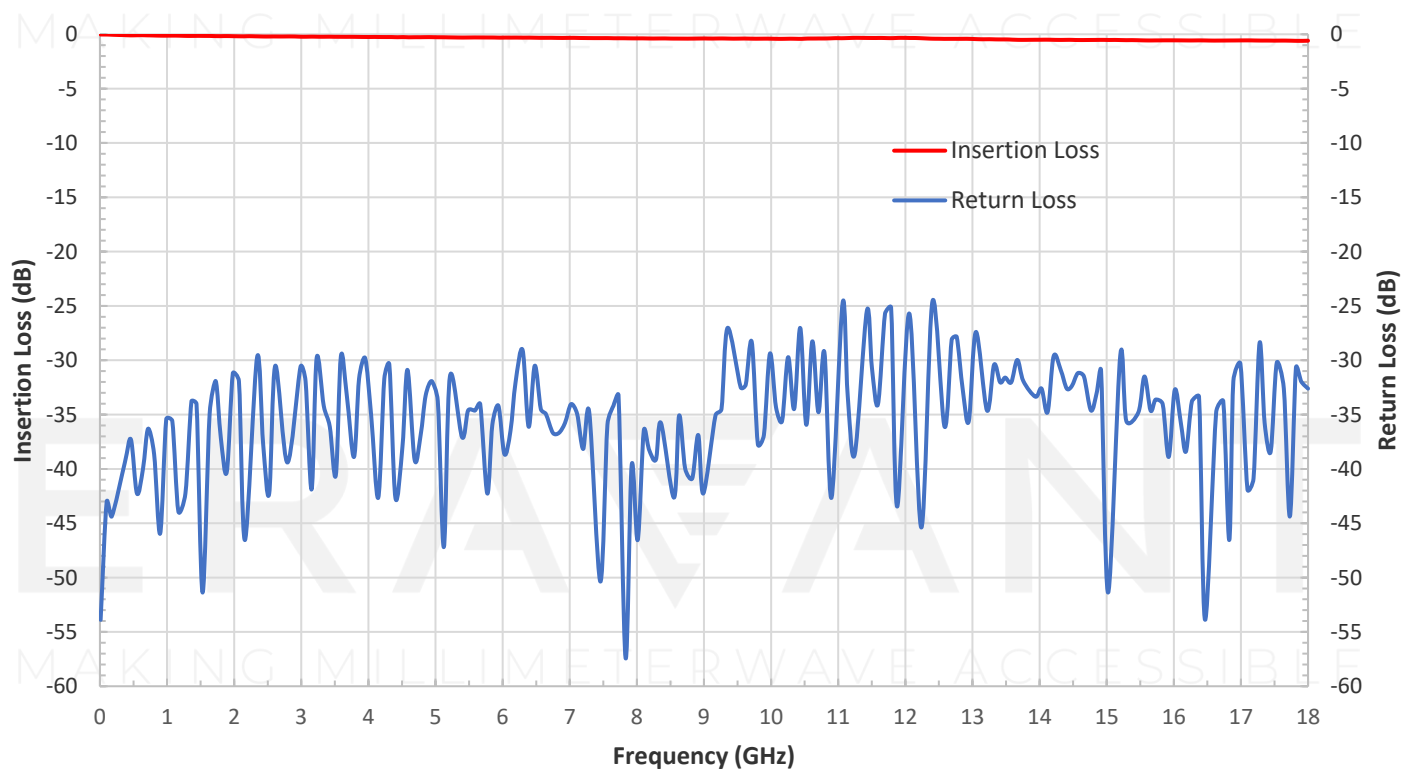

STQ-CW-SMSM012-F2-PS

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

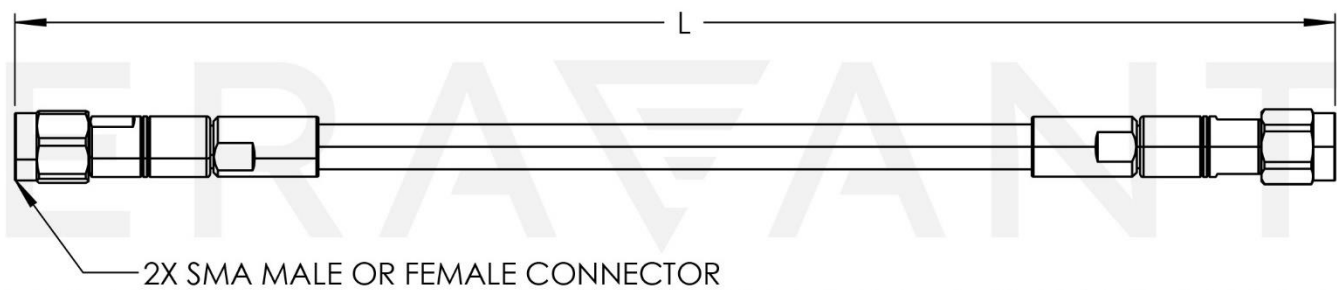

NOTE:

LENGTH "L" IS CUSTOMIZABLE

NOTE:

- Length "L" can be customizable.
- All data presented is collected from a sample lot. Actual data may vary slightly from unit to unit.
- All testing is performed under +25 °C case temperature.
- Eravant reserves the right to change the information presented without notice.

CAUTION:

- Bending the cable sharply will either cause damage or degrade the performance of the cable.
- Proper torque should be applied: 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm). Torque wrench model [SCH-08008-S1](#) is highly recommended.