

STQ-CW-SMSM024-F2-LG

SMA (M) to SMA (M) Lab Test Cable, Flexible, 24"

STQ-CW-SMSM024-F2-LG is a 24" long, flexible, coaxial cable with SMA male connectors that cover the frequency range of DC to 26.5 GHz. The coaxial cable utilizes high performance material and a precision manufacturing process to guarantee superior microwave performance and mechanical durability. The impedance of the cable is 50 ohms. Other lengths are offered under different models.



Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency Range	DC		26.5 GHz
Insertion Loss @ 3 GHz		< 0.7 dB	
Insertion Loss @ 6 GHz		< 1.0 dB	
Insertion Loss @ 12 GHz		< 1.4 dB	
Insertion Loss @ 18 GHz		< 1.8 dB	
Insertion Loss @ 26.5 GHz		< 2.3 dB	
Return Loss @ 26.5 GHz		19 dB	
Impedance		50 Ω	
Breakdown Voltage			1200 Volts
Radiation Shielding		90 dB	
Power Handling @ 26.5 GHz			105 W (CW)
Specification Temperature		+25 °C	
Operating Temperature	-40 °C		+85 °C

Mechanical Specifications:

Item	Specification
Connectors	SMA Male
Cable Contact Material	Be-Cu / Gold Plating per MIL-G-45204
Connector Material	Passivated Stainless Steel
Connector Dielectric	PTFE
Cable Dielectric	LD PTFE
Cable Jacket Material	TPU
Cable Outer Diameter	0.197"
Length	24"
Minimum Bending Radius	1"
Weight	1.1 Oz
Outline	CW-SS-F10-LG

ECCN

EAR99

FEATURES

- High Return Loss
- Low Insertion Loss
- Flexible and Durable

APPLICATIONS


- Test Lab
- Sub-assemblies
- VNA Extender

SUPPLEMENTAL DETAILS




STQ-CW-SMSM024-F2-LG

Typical Performance vs. Frequency

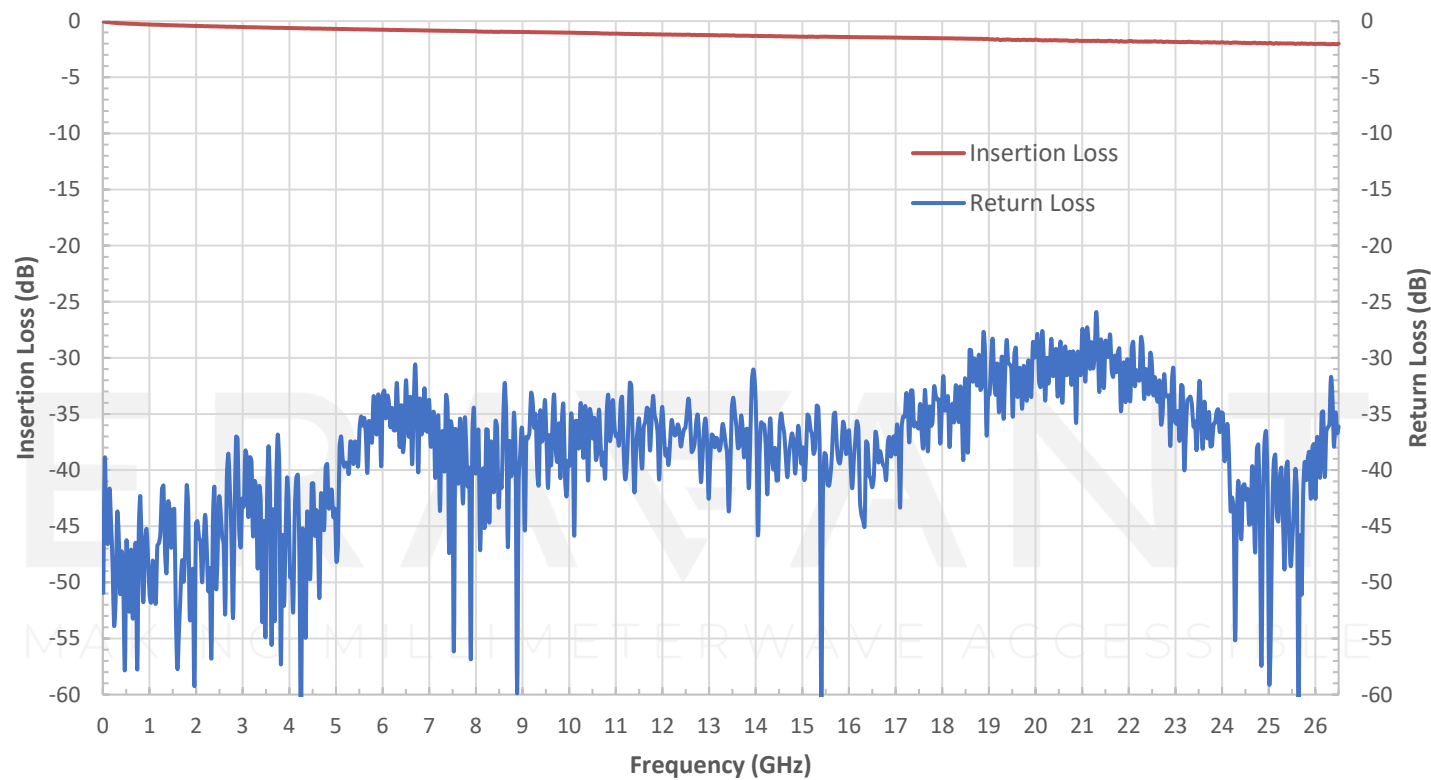

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

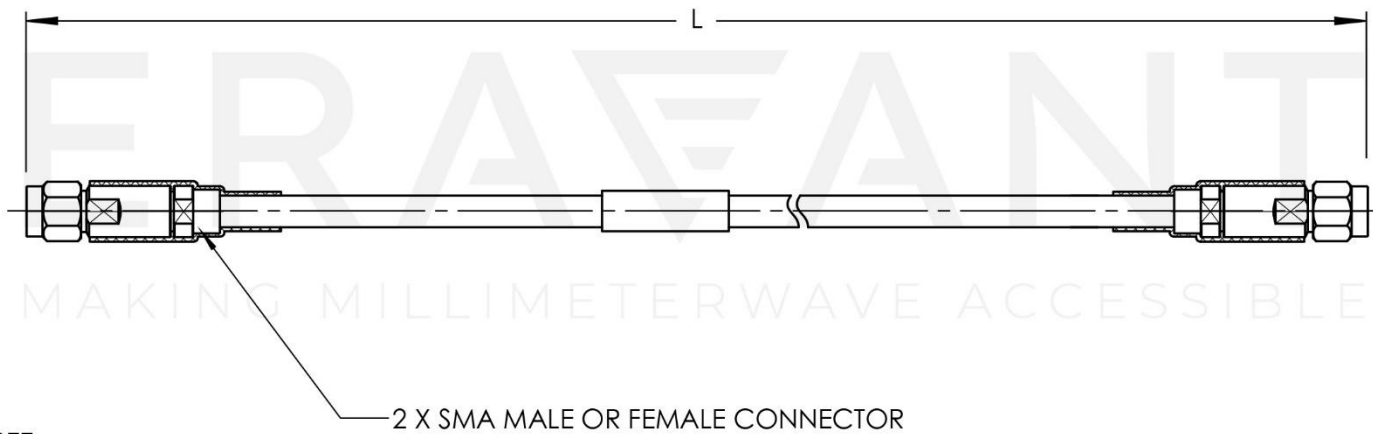

NOTE:

LENGTH "L" IS CUSTOMIZABLE

NOTE:

- Length "L" can be customizable.
- All data presented is collected from a sample lot. Actual data may vary slightly from unit to unit.
- All testing is performed under +25 °C case temperature.
- Eravant reserves the right to change the information presented without notice.

CAUTION:

- Bending the cable sharply will either cause damage or degrade the performance of the cable.
- Proper torque should be applied: 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm). Torque wrench model SCH-08008-S1 is highly recommended.

ERAVANT

MAKING MILLIMETERWAVE ACCESSIBLE

ERAVANT

MAKING MILLIMETERWAVE ACCESSIBLE