

## WR-03 H-Plane Waveguide Bend, 90°, Precision Machined

**STQ-WB-03090-H1** is a 90°, WR-03 H-plane waveguide bend with UG-387/U-M Anti-Cocking flanges. The bend radius is 0.75". The waveguide bend covers the frequency range of 220 to 330 GHz. The waveguide bend is manufactured with precision machining as a split-block body, which results in a robust, reinforced mechanical structure that will not flex or bend compared to traditional waveguide sections made with thin-wall tubing and brazed joints. Other bend angles and bend radius are available under different model numbers.



### Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	220 GHz		330 GHz
Insertion Loss		3.5 dB	
Return Loss		18 dB	
Specification Temperature		+25°C	
Operating Temperature	-40°C		+85°C

### Mechanical Specifications:

Item	Specification
Waveguide Size	WR-03 Waveguide with UG-387/U-M Anti-Cocking Flange
Bend Plane	H-Plane
Bend Angle	90°
Bend Radius Length (A)	0.75"
Bend Radius Length (B)	0.75"
Material	Brass
Finish	Gold Plated
Weight	1.2 Oz
Outline	WB-H03-A-SB-L

### ECCN

EAR99

### FEATURES

- Frequency Range: 220 to 330 GHz
- Sturdy Split-Block Mechanical Structure


### APPLICATIONS

- Test Instrumentation
- Sub-assemblies


### SUPPLEMENTAL DETAILS



Typical Measured Performance vs Frequency

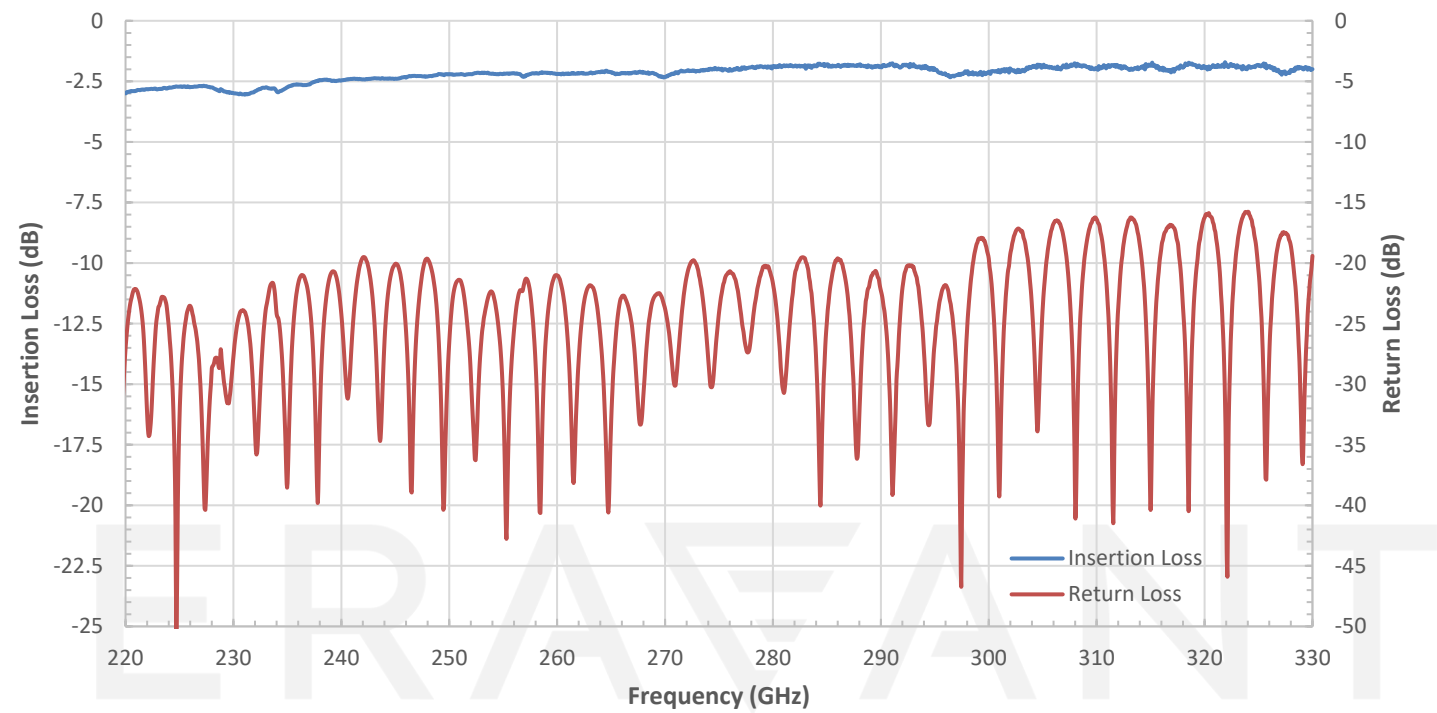

**Mechanical Outline:** (Unless otherwise specified, all dimensions are in inches [millimeters])

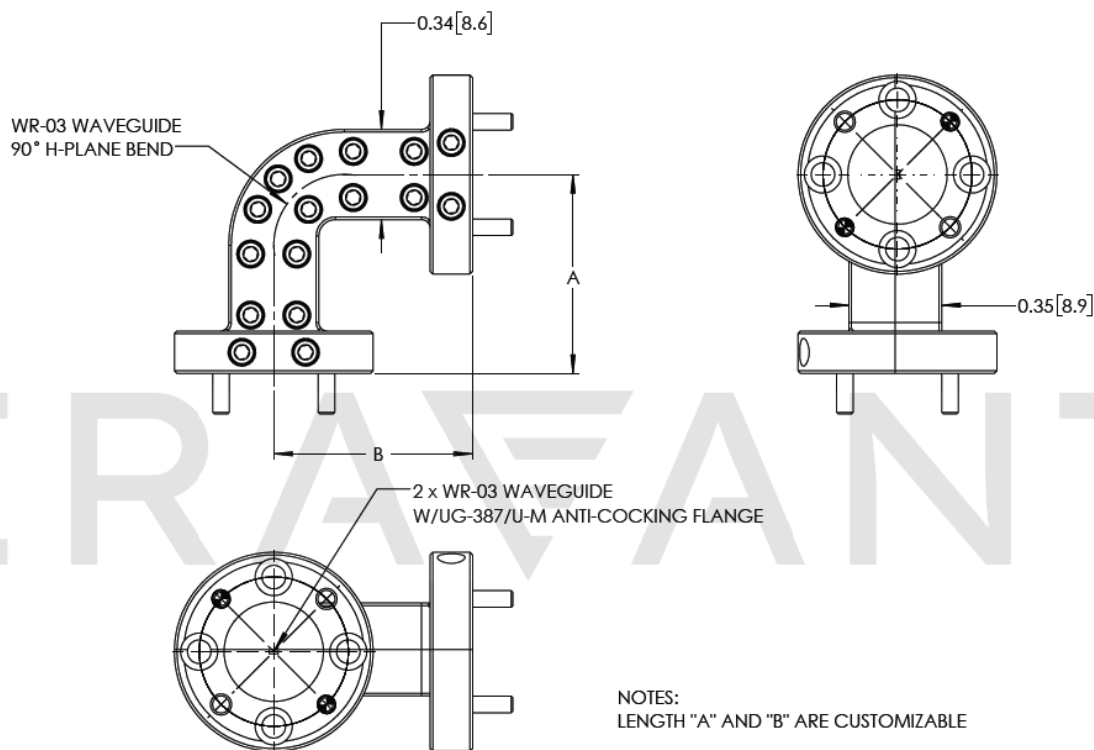

**NOTE:**

- On condition that test data is provided it is collected from a sample lot. Actual data may vary slightly from unit to unit. All testing is performed under +25 °C room temperature.
- Eravant reserves the right to change the information presented without notice.

ERAVANT  
MAKING MILLIMETERWAVE ACCESSIBLE

ERAVANT  
MAKING MILLIMETERWAVE ACCESSIBLE