

## WR-05 H-Plane Waveguide Bend, 90°, Precision Machined

**STQ-WB-05090-H1** is a 90°, WR-05 H-plane waveguide bend with UG-387/U-M Anti-Cocking flanges. The bend radius is 0.75". The waveguide bend covers the frequency range of 140 to 220 GHz. The waveguide bend is manufactured with precision machining as a split-block body, which results in a robust, reinforced mechanical structure that will not flex or bend compared to traditional waveguide sections made with thin-wall tubing and brazed joints. Other bend angles and bend radius are available under different model numbers.



### Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	140 GHz		220 GHz
Insertion Loss		2.3 dB	
Return Loss		23 dB	
Specification Temperature		+25°C	
Operating Temperature	-40°C		+85°C

### Mechanical Specifications:

Item	Specification
Waveguide Size	WR-05 Waveguide with UG-387/U-M Anti-Cocking Flange
Bend Plane	H-Plane
Bend Angle	90°
Bend Radius Length (A)	0.75"
Bend Radius Length (B)	0.75"
Material	Brass
Finish	Gold Plated
Weight	1.2 Oz
Outline	WB-HG-A-SB-L

### ECCN

EAR99

### FEATURES

- Frequency Range: 140 to 220 GHz
- Sturdy Split-Block Mechanical Structure


### APPLICATIONS

- Test Instrumentation
- Sub-assemblies

### SUPPLEMENTAL DETAILS



**Mechanical Outline:** (Unless otherwise specified, all dimensions are in inches [millimeters])

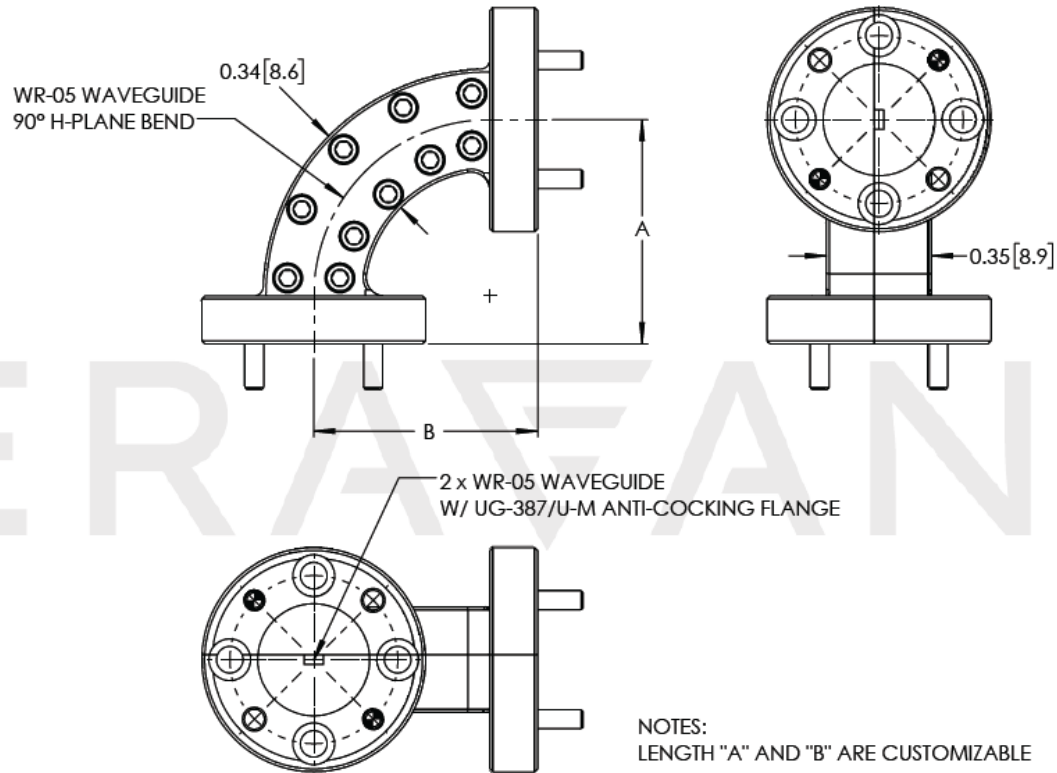

**NOTE:**

- On condition that test data is provided it is collected from a sample lot. Actual data may vary slightly from unit to unit. All testing is performed under +25 °C room temperature.
- Eravant reserves the right to change the information presented without notice.

ERAVANT

MAKING MILLIMETERWAVE ACCESSIBLE