

STV-00-06-S1

D-Band Full Waveguide Band Up-Converter

STV-00-06-S1 is a D-Band up-converter that converts IF signals from a frequency range of DC to 30 GHz with -15 dBm power to the millimeterwave frequency at 110 to 170 GHz. The up-converter requires 9.16 to 14.17 GHz at +3 dBm input power as its LO, which can be obtained from a standard 20 GHz synthesizer, such as Eravant model [SOT-02220313200-SF-B6](#). The up-converter has low harmonic levels and excellent gain flatness, making it a good candidate to extend low frequency test equipment for millimeterwave testing purposes.



Electrical Specifications:

Parameter	Minimum	Typical	Maximum
IF Input Frequency	DC	1 GHz	30 GHz
IF Input Power		-15 dBm	+13 dBm
RF Output Frequency	110 GHz		170 GHz
LO Input Frequency	9.16 GHz		14.17 GHz
LO Power		+3 dBm	+20 dBm
Conversion Loss		15 dB	
Harmonic Suppression		20 dB	
Power Supply (AC Adapter Provided)	100 V _{AC}		240 V _{AC}
Specification Temperature		+25 °C	
Operating Temperature	0 °C		+50 °C

Mechanical Specifications:

Item	Specification
RF Port	WR-06 Waveguide with UG-387/U-M Precision Anti-Cocking Flange
LO Port	SMA (F)
IF Port	2.92 mm (F)
DC Bias Port	2.5 mm DC Jack (AC-to-DC power converter included)
DC Bias Switch	On-Off Latching Switch with Indicator Light
Enclosure Material	Black Anodized Aluminum
Weight	2.3 lbs
Dimensions	4.89" (W) x 5.00" (L) x 1.90" (H)
Outline	TC-D-A

ECCN

3A001.b.7

FEATURES

- Full Band Coverage
- Good Conversion Flatness

APPLICATIONS

- Test Lab
- Instrumentations
- Auto Test Set


SUPPLEMENTAL DETAILS



STV-00-06-S1


Conversion Loss vs. Frequency

RF: -20 dBm

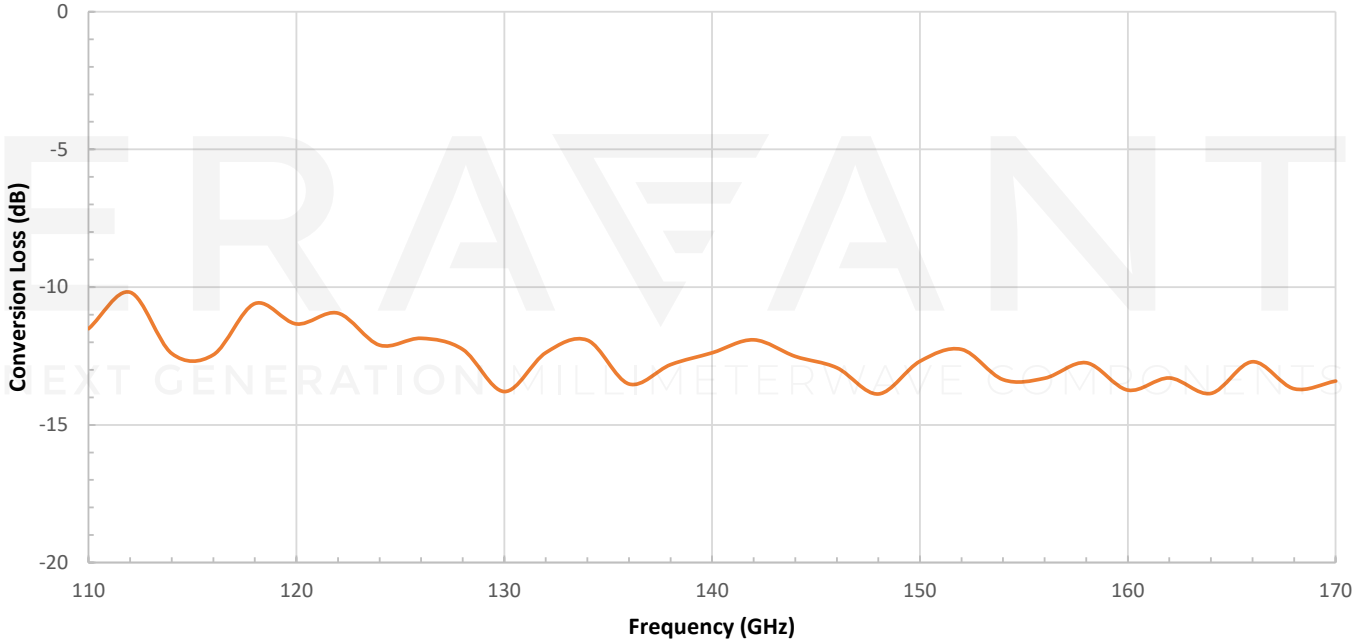

Mechanical Outline:

Unless otherwise specified, all dimensions are in inches [millimeters]

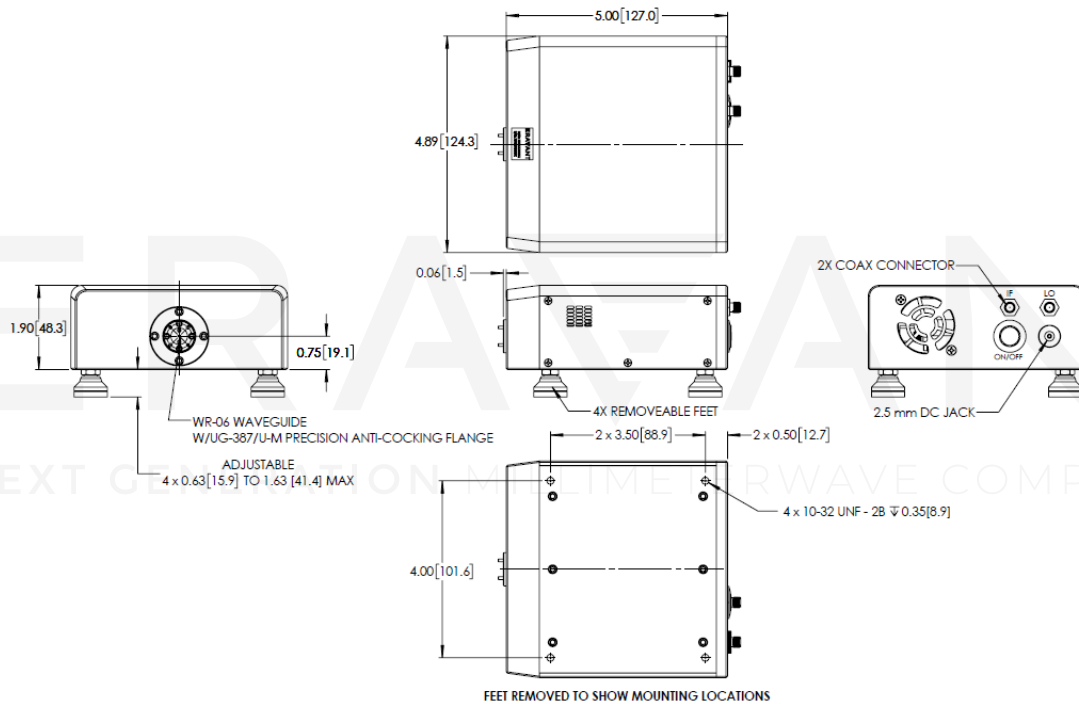

STV-00-06-S1

NOTE:

- On condition that test data is provided it is collected from a sample lot. Actual data may vary slightly from unit to unit. All testing is performed under +25 °C room temperature.
- On condition that simulated test data is provided, actual measured data may slightly vary.
- Eravant reserves the right to change the information presented without notice.

CAUTION:

- If a waveguide is present, any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.
- For 1 mm connectors proper torque should be applied: 4.0 ± 0.15 inch-pounds (0.45 ± 0.02 Nm). Torque wrench model [SCH-06004-S1](#) is highly recommended.
- For 1.35 mm, 1.85 mm, 2.4 mm, 2.92 mm, and SMA connectors proper torque should be applied: 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm). Torque wrench model [SCH-08008-S1](#) is highly recommended.