

WR-03 Band Waveguide Twist, 90°, 2.0"

SWB-03090-TB-2.0 is a 90 degree, WR-03 waveguide twist with UG-387/U-M anti-cocking flange. The length of the twist is 2.0". The waveguide twist is manufactured through a precision machining process to ensure high quality and ruggedness. The waveguide is offered to cover the frequency range of 220 to 330 GHz.



Mechanical Specifications:

Item	Specification
Waveguide Size	WR-03 Waveguide with UG-387/U-M Anti-Cocking Flange
Twist Angle	90 Degrees
Insertion Length	2.0"
Flange Material	Brass
Waveguide Material	Copper
Finish	Gold Plated
Outline	WB-T03-A-L

ECCN

EAR99

FEATURES

- Frequency Range: 220 to 330 GHz
- Low Insertion Loss
- Rugged Waveguide Configuration

APPLICATIONS

- Test Lab
- Sub-assemblies
- Lab Use


SUPPLEMENTAL DETAILS

MAKING MILLIMETERWAV<mark>E ACCESSIBL</mark>





Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

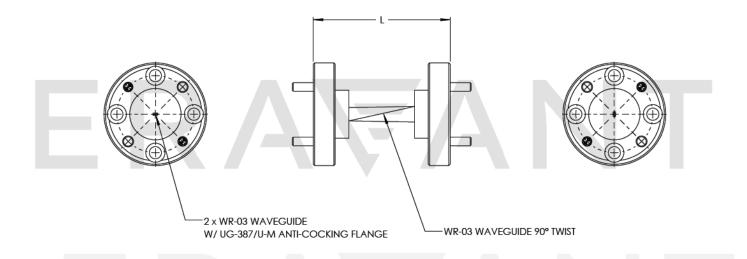

NOTE:

• Eravant reserves the right to change the information presented without notice.

MAKING MILLIMETERWAVE ACCESSIBLE

ERAFANT

MAKING MILLIMETERWAVE ACCESSIBLE