

# WR-08 H-Plane Waveguide Bend, 45°

**SWB-08045-HB** is a 45 degree, WR-08 H-plane waveguide bend with UG-387/U-M anti-cocking flanges. The bend radius is 0.75". The waveguide bend is manufactured through a precision machining process to ensure high quality and ruggedness. The waveguide is offered to cover the frequency range of 90 to 140 GHz. The waveguide is also available in instrumentation grade.



# **Mechanical Specifications:**

| Item               | Specification  |
|--------------------|--|
| Waveguide Size     | WR-08 Waveguide with UG-387/U-M Anti-Cocking Flanges |
| Bend Plane         | H Plane  |
| Bend Angle         | 45 Degrees   |
| Bend Radius        | 0.75"  |
| Flange Material    | Brass  |
| Waveguide Material | Copper   |
| Finish             | Gold Plated  |
| Outline            | WB-HF-5-A  |

#### **ECCN**

EAR99

## **FEATURES**

- Frequency Coverage: 90 to 140 GHz
- Rugged Waveguide Configuration
- Low Insertion Loss

#### **APPLICATIONS**

- Test Instrumentation
- Sub-assemblies
- Lab Use


## **SUPPLEMENTAL DETAILS**

MAKING MILLIMETERWAV<mark>E ACCESSIBL</mark>





Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

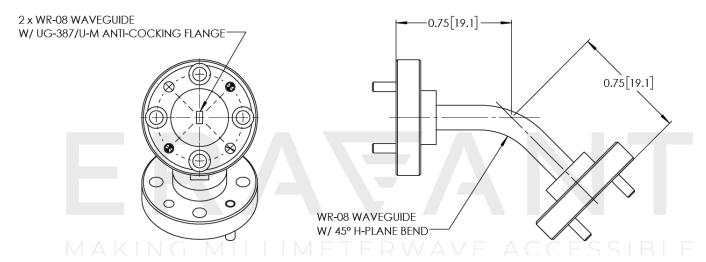

#### NOTE:

- On condition that test data is provided it is collected from a sample lot. Actual data may vary slightly from unit to unit. All testing is performed under +25 °C room temperature.
- On condition that simulated test data is provided, actual measured data may slightly vary.
- Eravant reserves the right to change the information presented without notice.

#### **CAUTION:**

• If a waveguide is present, any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.

# ERAFANT

MAKING MILLIMETERWAVE ACCESSIBLE