

SWB-08045R-TB-1.0

WR-08 Waveguide Twist, 45° Right-Handed

SWB-08045R-TB-1.0 is a 45 degree, WR-08 right-handed waveguide twist with UG-387/U-M anti-cocking flanges. The length of the twist is 1". The waveguide twist is manufactured through a precision machining process to ensure high quality and ruggedness. The waveguide is offered to cover the frequency range of 90 to 140 GHz. Additional lengths may be available in stock, please contact us to inquire further.



Mechanical Specifications:

Item	Specification
Waveguide Size	WR-08 Waveguide with UG-387/U-M Anti-Cocking Flanges
Twist Angle	45 Degrees
Twist Orientation	Right-Handed
Insertion Length	1.0"
Flange Material	Brass
Waveguide Material	Copper
Finish	Gold Plated
Weight	0.6 Oz
Outline	WB-TF-5R-A-L

ECCN

EAR99

FEATURES

- Frequency Coverage: 90.0 to 140.0 GHz
- Rugged Waveguide Configuration
- Low Insertion Loss

APPLICATIONS


- Test Instrumentation
- Sub-assemblies
- Lab Use

SUPPLEMENTAL DETAILS



SWB-08045R-TB-1.0

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

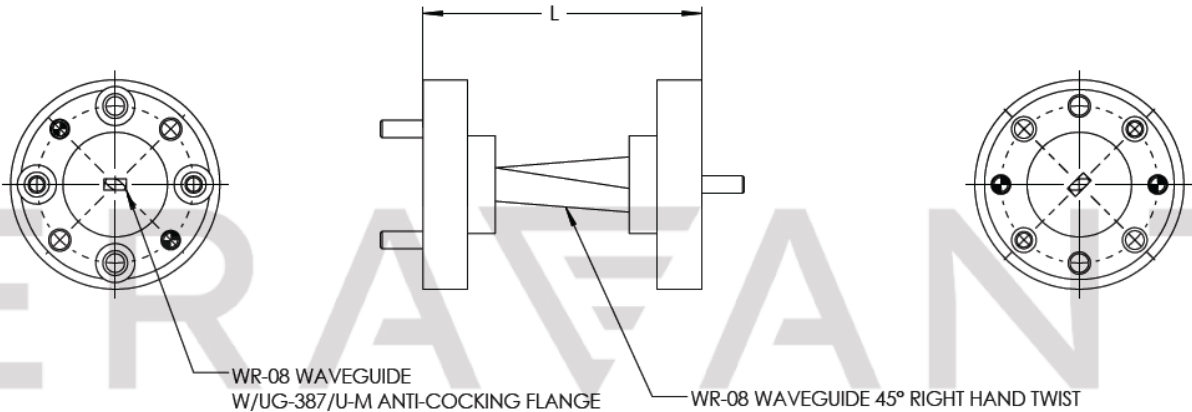

NOTE:

LENGTH "L" IS CUSTOMIZABLE

NOTE:

- On condition that test data is provided it is collected from a sample lot. Actual data may vary slightly from unit to unit. All testing is performed under +25 °C room temperature.
- On condition that simulated test data is provided, actual measured data may slightly vary.
- Eravant reserves the right to change the information presented without notice.

CAUTION:

- If a waveguide is present, any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.