

SWB-08090-TB-WP

WR-08 Waveguide Twist, 90°

SWB-08090-TB-WP is a 90 degree, WR-08 waveguide twist with UG-387/U-M circular flanges. The insertion length of the twist is 1.25". The waveguide twist is manufactured through a precision machining process to ensure high quality and ruggedness. The waveguide is offered to cover the frequency range of 90 to 140 GHz.



Mechanical Specifications:

Item	Specification
Waveguide Size	WR-08 Waveguide with UG-387/U-M Flanges
Twist Angle	90 °
Insertion Length	1.25"
Material	Brass
Finish	Gold Plated
Weight	0.6 Oz
Outline	WB-TF

ECCN

EAR99

FEATURES

- Frequency Coverage: 90 to 140 GHz
- Rugged Waveguide Configuration
- Low Insertion Loss

APPLICATIONS

- Test Instrumentation
- Sub-assemblies
- Lab Use


SUPPLEMENTAL DETAILS



SWB-08090-TB-WP

Mechanical Outline:

Unless otherwise specified, all dimensions are in inches [millimeters])

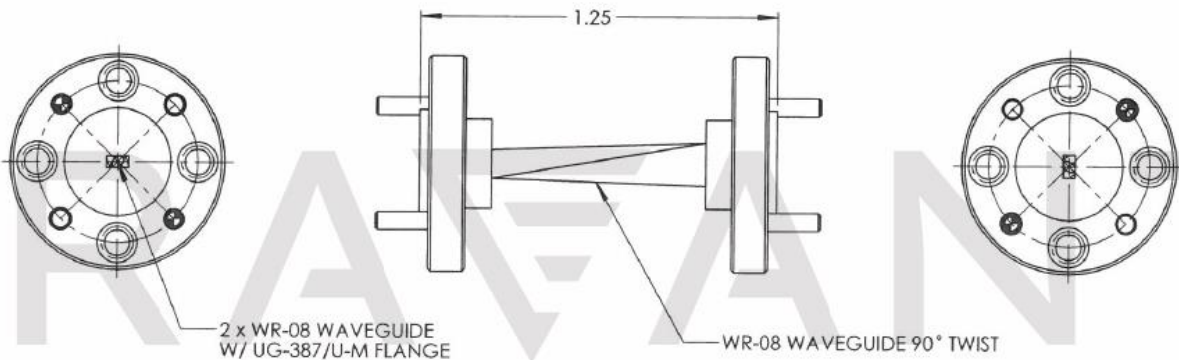

NOTE:

- Eravant reserves the right to change the information presented without notice.