

WR-10 Waveguide Twist, 45° Right-Handed, 1"

SWB-10045R-TB-1.0 is a 45 degree, WR-10 right-handed waveguide twist with UG-387/U-M flanges. The length of the twist is 1.00". The waveguide twist is manufactured through a precision machining process to ensure high quality and ruggedness. The waveguide is offered to cover the frequency range of 75 to 110 GHz.



Mechanical Specifications:

Item	Specification
Waveguide Size	WR-10 Waveguide with UG-387/U-M Flanges
Twist Angle	45 Degrees
Twist Orientation	Right-Handed
Insertion Length	1.00" MILLIMETERWAT
Flange Material	Brass
Waveguide Material	Copper
Finish	Gold Plated
Weight	0.6 Oz
Outline	WB-TW-5R-1.0

ECCN

EAR99

FEATURES

- Frequency Coverage: 75.0 to 110.0 GHz
- Rugged Waveguide Configuration
- Low Insertion Loss

APPLICATIONS

- Test Instrumentation
- Sub-assemblies
- Lab Use


SUPPLEMENTAL DETAILS

MAKING MILLIMETERWAV<mark>E ACCESSIBL</mark>





Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

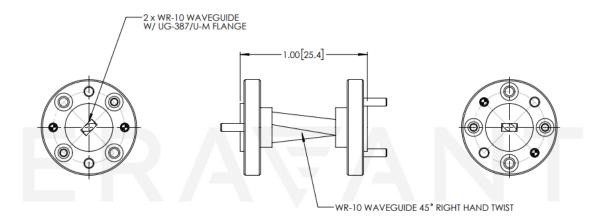

NOTE:

- On condition that test data is provided it is collected from a sample lot. Actual data may vary slightly from unit to unit. All testing is performed under +25 °C room temperature.
- On condition that simulated test data is provided, actual measured data may slightly vary.
- Eravant reserves the right to change the information presented without notice.

CAUTION:

 If a waveguide is present, any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.

ERAFANT

MAKING MILLIMETERWAVE ACCESSIBLE