

WR-19 E-Plane Waveguide Bend, 90°

SWB-19090-EB-1.5 is a 90 degree, WR-19 E-plane waveguide bend with UG-383/U-M anti-cocking flanges. The bend radius 1.5". The waveguide bend is manufactured through a precision machining process to ensure high quality and ruggedness. The waveguide is offered to cover the frequency range of 40 to 60 GHz.



Mechanical Specifications:

Item	Specification
Waveguide Size	WR-19 Waveguide with UG-383/U-M Anti-Cocking Flanges
VSWR	1.10:1 (Max)
Bend Plane	E Plane
Bend Angle	90 Degrees
Bend Radius	1.5"
Flange Material	Brass
Waveguide Material	Copper
Finish	Gold Plated
Weight	1.60 Oz
Outline	WB-EU-A-L

ECCN

EAR99

FEATURES

- Frequency Coverage: 40.0 to 60.0 GHz
- Rugged Waveguide Configuration
- · Low Insertion Loss

APPLICATIONS

- Test Instrumentation
- Sub-assemblies
- Lab Use


SUPPLEMENTAL DETAILS







Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

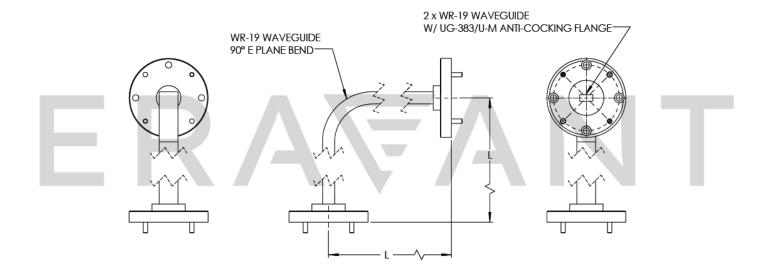

NOTES:

LENGTH "L" IS CUSTOMIZABLE

MANINO MILLIMLILAVAVE ACCESSIE

NOTE:

- On condition that test data is provided it is collected from a sample lot. Actual data may vary slightly from unit to unit. All testing is performed under +25 °C room temperature.
- On condition that simulated test data is provided, actual measured data may slightly vary.
- Eravant reserves the right to change the information presented without notice.

CAUTION:

• If a waveguide is present, any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.

ERAFANT

MAKING MILLIMETERWAVE ACCESSIBLE