

## WR-19 H-Plane Waveguide Bend, 90°

**SWB-19090-HB-1.5** is a 90 degree, WR-19 H-plane waveguide bend with UG-383/U-M anti-cocking flanges. The bend radius 1.5". The waveguide bend is manufactured through a precision machining process to ensure high quality and ruggedness. The waveguide is offered to cover the frequency range of 40 to 60 GHz.



## **Mechanical Specifications:**

| Item               | Specification  |
|--------------------|--|
| Waveguide Size     | WR-19 Waveguide with UG-383/U-M Anti-Cocking Flanges |
| VSWR               | 1.10:1 (Max)   |
| Bend Plane         | H-Plane  |
| Bend Angle         | 90 Degrees   |
| Bend Radius        | 1.5"   |
| Flange Material    | Brass  |
| Waveguide Material | Copper   |
| Finish             | Gold Plated  |
| Weight             | 1.60 Oz  |
| Outline            | WB-HU-A-L  |

#### **ECCN**

EAR99

#### **FEATURES**

- Frequency Coverage: 40.0 to 60.0 GHz
- Rugged Waveguide Configuration
- Low Insertion Loss

#### **APPLICATIONS**

- · Test Instrumentation
- Sub-assemblies
- Lab Use


#### **SUPPLEMENTAL DETAILS**







Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

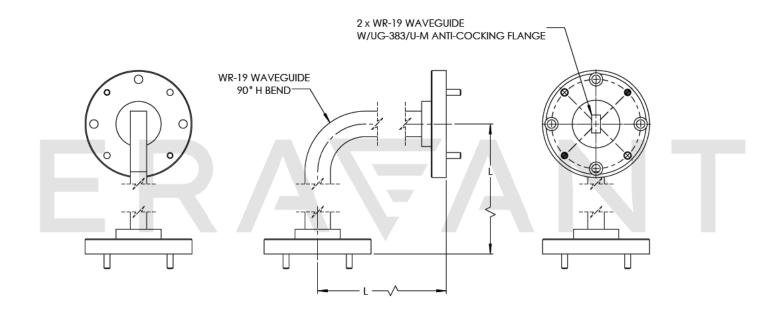

# NOTE: MAKING MILLIMETERWAVE ACCESSIBLE

- On condition that test data is provided it is collected from a sample lot. Actual data may vary slightly from unit to unit. All
  testing is performed under +25 °C room temperature.
- On condition that simulated test data is provided, actual measured data may slightly vary.
- Eravant reserves the right to change the information presented without notice.

#### **CAUTION:**

• If a waveguide is present, any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.

# ERAFANT

MAKING MILLIMETERWAVE ACCESSIBLE