# SWB-22090-EB-1.5

# WR-22 E-Plane Waveguide Bend, 90°

SWB-22090-EB-1.5 is a 90 degree, WR-22 E-plane waveguide bend with UG-383/U anti-cocking flanges. The bend radius is 1.5". The waveguide bend is manufactured through a precision machining process to ensure high quality and ruggedness. The waveguide is offered to cover the frequency range of 33 to 50 GHz.

# **Mechanical Specifications:**

Item	Specification	
Waveguide Size	WR-22 Waveguide with UG-383/U Anti-Cocking Flanges	ECC
Bend Plane	E Plane	EARS
Bend Angle	90 Degrees	FEA
Bend Radius	1.5° MILLIMETERVA	
Flange Material	Brass	Ę
Waveguide Material	Copper	• F
Finish	Gold Plated	• [
Weight	1.6 Oz	
Outline	WB-EQ-A-L	APP

CN 99

#### ATURES

- Frequency Coverage: 33.0 to 50.0 GHz
- Rugged Waveguide Configuration
- Low Insertion Loss

## PLICATIONS

- **Test Instrumentation**
- Sub-assemblies
- Lab Use

## SUPPLEMENTAL DETAILS




# ERAVANT

# SWB-22090-EB-1.5

# ERAWANT

# Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

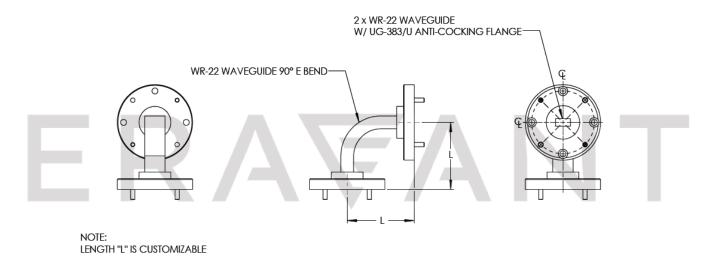

## NOTE:

- On condition that test data is provided it is collected from a sample lot. Actual data may vary slightly from unit to unit. All testing is performed under +25 °C room temperature.
- On condition that simulated test data is provided, actual measured data may slightly vary.
- Eravant reserves the right to change the information presented without notice.

#### CAUTION:

 If a waveguide is present, any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.

# ERAFANT MAKING MILLIMETER WAVE ACCESSIBLE