### SWB-22090-HB-1.5

### WR-22 H-Plane Waveguide Bend, 90°

**SWB-22090-HB-1.5** is a 90 degree, WR-22 H-plane waveguide bend with UG-383/U anti-cocking flanges. The bend radius is 1.5". The waveguide bend is manufactured through a precision machining process to ensure high quality and ruggedness. The waveguide is offered to cover the frequency range of 33 to 50 GHz.

### Mechanical Specifications:

Item	Specification		
Waveguide Size	WR-22 Waveguide with UG-383/U Anti-Cocking Flanges		E
Bend Plane	H Plane		E
Bend Angle	90 Degrees		F
Bend Radius	1.5°		
Flange Material	Brass		
Waveguide Material	Copper		•
Finish	Gold Plated		
Weight	1.6 Oz		
Outline	WB-HQ-A-L		Α

### ECCN

#### **FEATURES**

- Frequency Coverage: 33.0 to 50.0 GHz
- Rugged Waveguide Configuration
- Low Insertion Loss

### APPLICATIONS

- Test Instrumentation
- Sub-assemblies
- Lab Use

### SUPPLEMENTAL DETAILS






## ERAWANT

### SWB-22090-HB-1.5

# ERAWANT

### Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

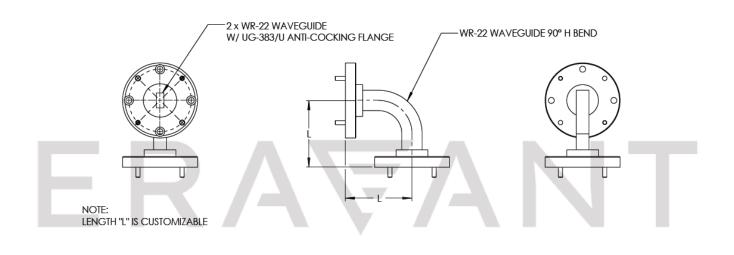

#### NOTE:

- On condition that test data is provided it is collected from a sample lot. Actual data may vary slightly from unit to unit. All
  testing is performed under +25 °C room temperature.
- On condition that simulated test data is provided, actual measured data may slightly vary.
- Eravant reserves the right to change the information presented without notice.

#### CAUTION:

• If a waveguide is present, any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.

# ERAFANT MAKING MILLIMETER WAVE ACCESSIBLE