

WR-28 Waveguide Twist, 90°, 1"

SWB-28090-TB-1.0-WPC is a 90 degree, WR-28 waveguide twist with UG-599/U square flanges. The length of the twist is 1.0". The waveguide twist is manufactured through a precision machining process to ensure high quality and ruggedness. The waveguide is offered to cover the frequency range of 26.5 to 40 GHz.



Mechanical Specifications:

Item	Specification
Waveguide Size	WR-28 Waveguide with UG-599/U Flanges
Twist Angle	90 Degrees
Insertion Length	1.0"
Flange Material	Brass UMILLIMEIERWA
Waveguide Material	Copper
Finish	Gold Plated
Weight	1.0 Oz
Outline	WB-TA-L

ECCN

EAR99

FEATURES

- Frequency Coverage: 26.5 to 40.0 GHz
- Rugged Waveguide Configuration
- Low Insertion Loss


APPLICATIONS

- Test Instrumentation
- Sub-assemblies
- Lab Use

SUPPLEMENTAL DETAILS



Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

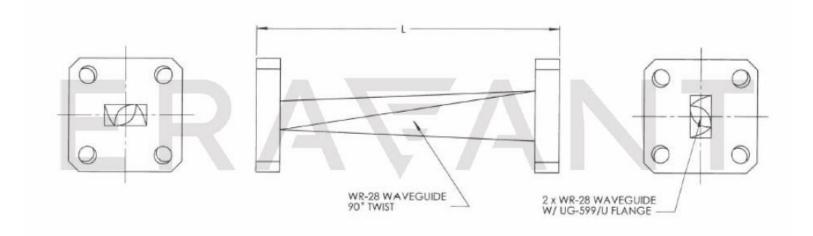

NOTE:

Eravant reserves the right to change the information presented without notice.

MAKING MILLIMETERWAVE ACCESSIBLE

ERAFANT

MAKING MILLIMETERWAVE ACCESSIBLE