

WR-34 H-Plane Waveguide Bend, 45°

SWB-34045-HB is a 45 degree, WR-34 H-plane waveguide bend with UG-1530/U flanges. The bend radius is 1.25". The waveguide bend is manufactured through a precision machining process to ensure high quality and ruggedness. The waveguide is offered to cover the frequency range of 22 to 33 GHz. The waveguide is also available in instrumentation grade.



Mechanical Specifications:

Item	Specification
Waveguide Size	WR-34 Waveguide with UG-1530/U Flanges
Bend Plane	H Plane
Bend Angle	45 Degrees
Bend Radius	1.25"
Flange Material	Brass
Waveguide Material	Copper
Finish	Gold Plated
Outline	WB-H3-5

ECCN

EAR99

FEATURES

- Frequency Coverage: 22 to 33 GHz
- Rugged Waveguide Configuration
- Low Insertion Loss

APPLICATIONS

- Test Instrumentation
- Sub-assemblies
- Lab Use


SUPPLEMENTAL DETAILS

MAKING MILLIMETERWAV<mark>E ACCESSIBL</mark>





Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

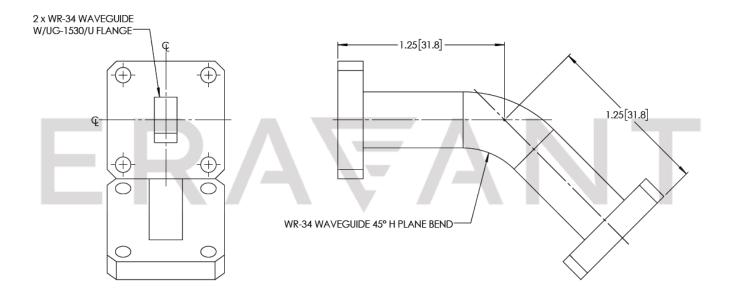

<u>MAKING MILLIMETERWAVE ACCESSIBLE</u>

NOTE:

- On condition that test data is provided it is collected from a sample lot. Actual data may vary slightly from unit to unit. All testing is performed under +25 °C room temperature.
- On condition that simulated test data is provided, actual measured data may slightly vary.
- Eravant reserves the right to change the information presented without notice.

CAUTION:

• If a waveguide is present, any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.

ERAFANT

MAKING MILLIMETERWAVE ACCESSIBLE