

WR-34 E-Plane Waveguide Bend, 90°

SWB-34090-EB is a 90 degree, WR-34 E-plane waveguide bend with UG-1530/U square flanges. The bend radius is 1.25". The waveguide bend is manufactured through a precision machining process to ensure high quality and ruggedness. The waveguide is offered to cover the frequency range of 22 to 33 GHz.



Mechanical Specifications:

Item	Specification
Waveguide Size	WR-34 Waveguide with UG-1530/U Flanges
Bend Plane	E Plane
Bend Angle	90 Degrees
Bend Radius	1.25"
Flange Material	Brass
Waveguide Material	Copper
Finish	Gold Plated
Weight	1.0 Oz
Outline	WB-E3

ECCN

EAR99

FEATURES

- Frequency Coverage: 22 to 33 GHz
- Rugged Waveguide Configuration
- Low Insertion Loss

APPLICATIONS

- Test Instrumentation
- Sub-assemblies
- Lab Use


SUPPLEMENTAL DETAILS

MAKING MILLIMETERWAV<mark>E ACCESSIBL</mark>





Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

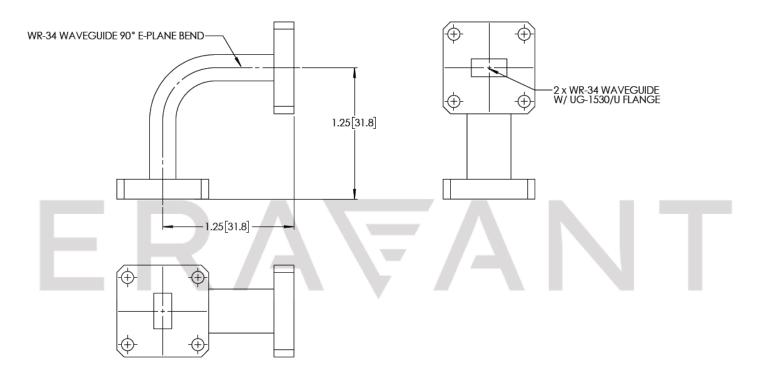

NAARING MILLIMETEDWAAVE ACCECCIDLE

NOTE:

- On condition that test data is provided it is collected from a sample lot. Actual data may vary slightly from unit to unit. All testing is performed under +25 °C room temperature.
- On condition that simulated test data is provided, actual measured data may slightly vary.
- Eravant reserves the right to change the information presented without notice.

CAUTION:

• If a waveguide is present, any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.

ERAFANT

MAKING MILLIMETERWAVE ACCESSIBLE