

E-Band Waveguide to 1.35mm Connector Adapter, End Launch

SWC-12EF-E1-WPC is an end launch (180°) E-Band waveguide to coax adapters that cover the frequency range of 60 to 90 GHz. They are designed and manufactured for instrumentation grade quality but offered at a commercial grade price, allowing for an efficient transition between the rectangular waveguide and 1.35 mm (E) coax connector. The right angle (90°) versions are offered under model numbers **SWC-12EF-R1** and **SWC-12EM-R1**.



Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency Range	60 GHz		90 GHz
Insertion Loss*		1.2 dB	
Return Loss	12 dB	15 dB	
Power Handling			20 W (CW)
Specification Temperature		+25°C	
Operating Temperature	-40°C		+85°C

*Insertion loss is tested back-to-back with a male and female adapter; the result is divided by 2.

Mechanical Specifications:

Item	Specification
Waveguide	WR-12 Waveguide with UG-387/U Anti-Cocking Flange
Coaxial Port	1.35 mm (E) Female
Material	Aluminum
Finish	Gold Plated
Weight	0.3 Oz
Outline	WC-EE-A

ECCN

EAR99

FEATURES

- Full Waveguide Band Coverage
- Lower Insertion Loss and VSWR
- Instrumentation Grade
- DC Short Circuit

APPLICATIONS


- Test Lab
- Instrumentations
- Sub-assemblies

SUPPLEMENTAL DETAILS




SWC-12EF-E1-WPC

Typical Performance vs. Frequency

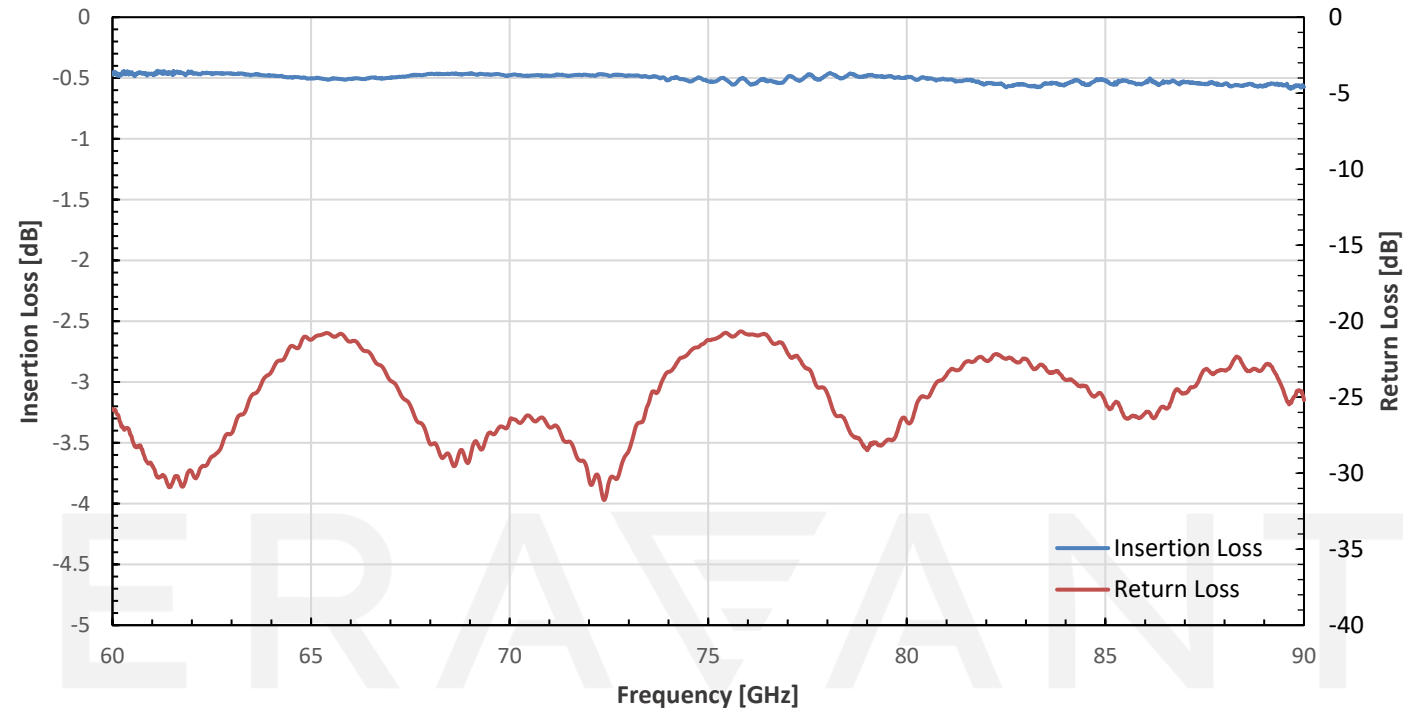

Mechanical Outline:

Unless otherwise specified, all dimensions are in inches [millimeters]

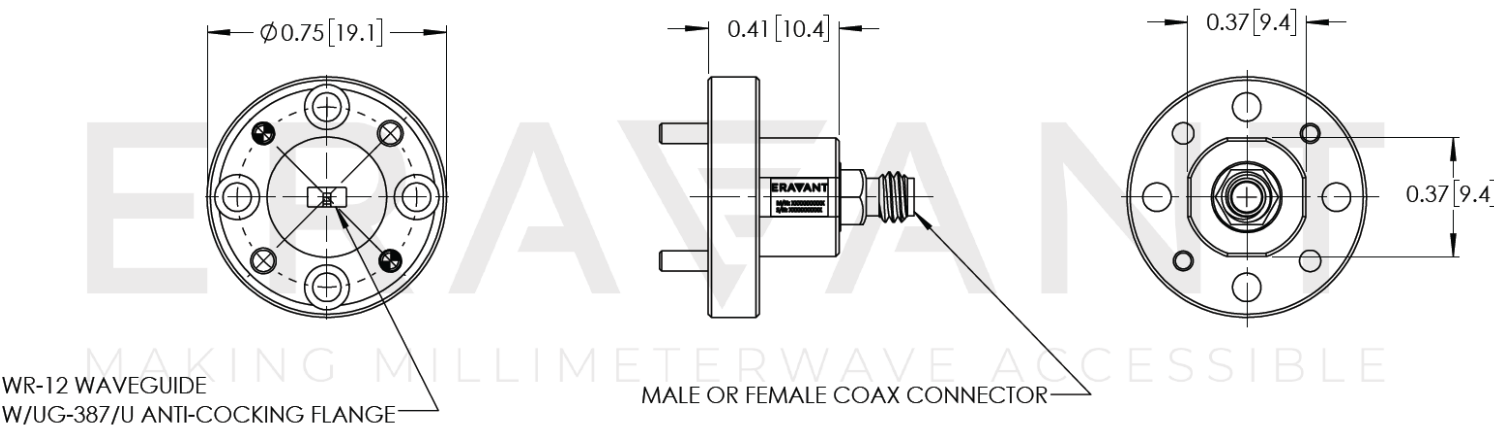

NOTE:

- On condition that test data is provided it is collected from a sample lot. Actual data may vary slightly from unit to unit. All testing is performed under +25 °C room temperature.
- On condition that simulated test data is provided, actual measured data may slightly vary.
- Eravant reserves the right to change the information presented without notice.

CAUTION:

- Any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.
- For 1.35 mm, 1.85 mm, 2.4 mm, 2.92 mm, and SMA connectors proper torque should be applied: 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm). Torque wrench model SCH-08008-S1 is highly recommended

ERAVANT
MAKING MILLIMETERWAVE ACCESSIBLE

ERAVANT
MAKING MILLIMETERWAVE ACCESSIBLE