

SWC-1508F-E1 and SWC-1508M-E1

V-Band Waveguide to 0.8 mm Connector Adapter, End Launch

SWC-1508F-E1 and SWC-1508M-E1 are end launch (180°) V-Band waveguide to coax adapters that cover the frequency range of 50 to 75 GHz. They are designed and manufactured for instrumentation grade quality but offered at a commercial grade price, allowing for an efficient transition between the rectangular waveguide and 0.8 mm coax connector.



Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency Range	50 GHz		75 GHz
Insertion Loss*		1.0 dB	
Return Loss		14 dB	
Specification Temperature		+25°C	
Operating Temperature	-40°C		+85°C

*Electrical specifications are based on Ideal Matched Condition with male and female adapters tested back-to-back.

*Insertion loss is tested back-to-back with male and female adapter, the result is divided by 2.

Mechanical Specifications:

Item	Specification
Waveguide	WR-15 Waveguide with UG-385/U Anti-Cocking Flange
Coaxial Port	0.8 mm Female for Model Number: SWC-1508F-E1
Coaxial Port	0.8 mm Male for Model Number: SWC-1508M-E1
Material	Aluminum
Finish	Gold Plated
Weight	0.3 Oz
Outline	WC-VE-A

ECCN

EAR99

FEATURES

- Full Band Operation
- Lower Insertion Loss and VSWR
- Instrumentation Grade
- DC Short Circuit

APPLICATIONS


- Test Lab
- Instrumentations
- Sub-assemblies

SUPPLEMENTAL DETAILS



SWC-1508F-E1 and SWC-1508M-E1

Mechanical Outline: Unless otherwise specified, all dimensions are in inches [millimeters]

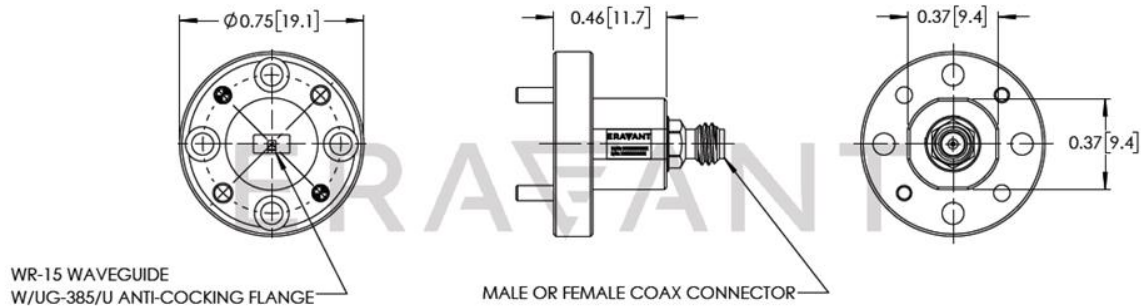

NOTE:

- On condition that test data is provided it is collected from a sample lot. Actual data may vary slightly from unit to unit. All testing is performed under +25 °C room temperature.
- On condition that simulated test data is provided, actual measured data may slightly vary.
- Eravant reserves the right to change the information presented without notice.

CAUTION:

- Any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.
- Proper torque should be applied to prevent damage to the unit: 4.0 ± 0.15 inch-pounds (0.45 ± 0.02 Nm).