

V-Band Waveguide to 1 mm Connector Adapter, End Launch, Non Anti-Cocking

Description:

Models SWC-151F-E1-NAC and SWC-151M-E1-NAC are end launch (180°) V-Band waveguide to coax adapters that cover the frequency range of 50 to 75 GHz. They are designed and manufactured for instrumentation grade quality but offered at a commercial grade price, allowing for an efficient transition between the rectangular waveguide and 1 mm coax connector. The right angle (90°) versions are offered under model numbers SWC-151F-R1 and SWC-151M-R1.



Features:

- Full Waveguide Band Coverage
- Lower Insertion Loss and VSWR
- Instrumentation Grade
- DC Short Circuit

Applications:

- Test Lab
- Instrumentations
- Sub-assemblies

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency Range	50 GHz		75 GHz
Insertion Loss*		0.7 dB	1.0 dB
Return Loss	12 dB	15 dB	
Power Handling			10 W (CW)
Specification Temperature		+25 °C	
Operating Temperature	-40 °C		+85 °C

*Insertion Loss is tested back-to-back with a male and female adapter, the result is divided by 2.


Mechanical Specifications:

Item	Parameter
Waveguide	WR-15 with UG-385/U Flange
Coaxial	1 mm Female for Model Number: SWC-151F-E1
Coaxial	1 mm Male for Model Number: SWC-151M-E1
Housing Material	Aluminum
Finish	Gold Plated
Weight	0.3 Oz
Size	0.45" (L) x 0.75" (Ø)
Outline	WC-V1E




V-Band Waveguide to 1 mm Connector Adapter, End Launch, Non Anti-Cocking

Typical Return Loss & Back to Back Insertion Loss vs. Frequency

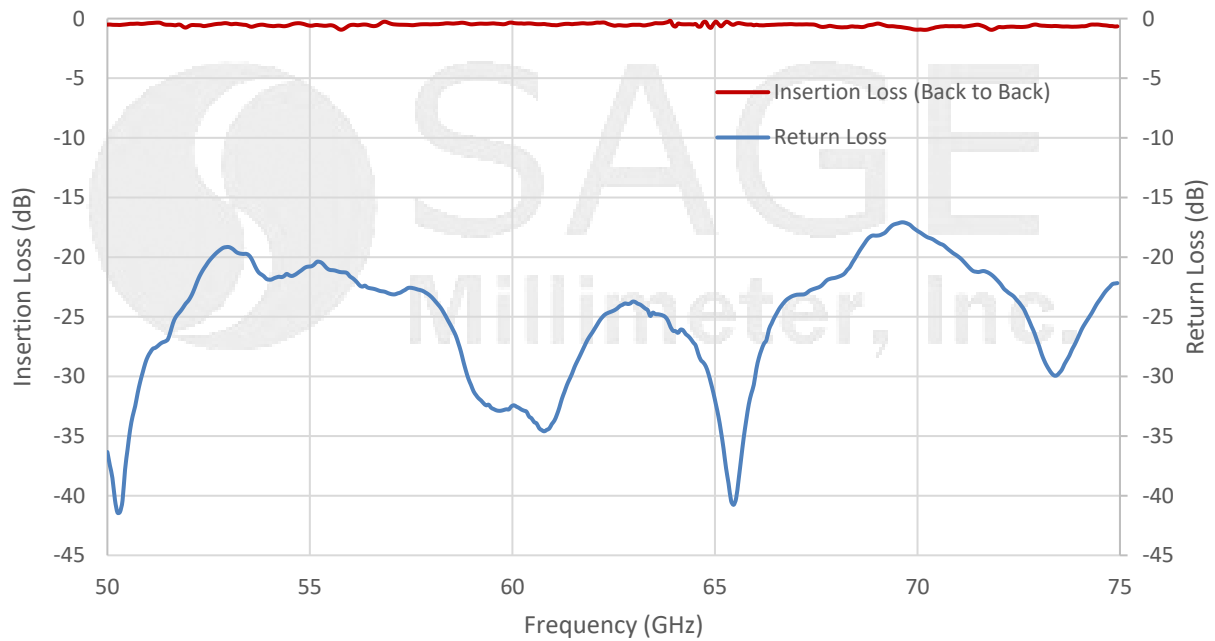

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

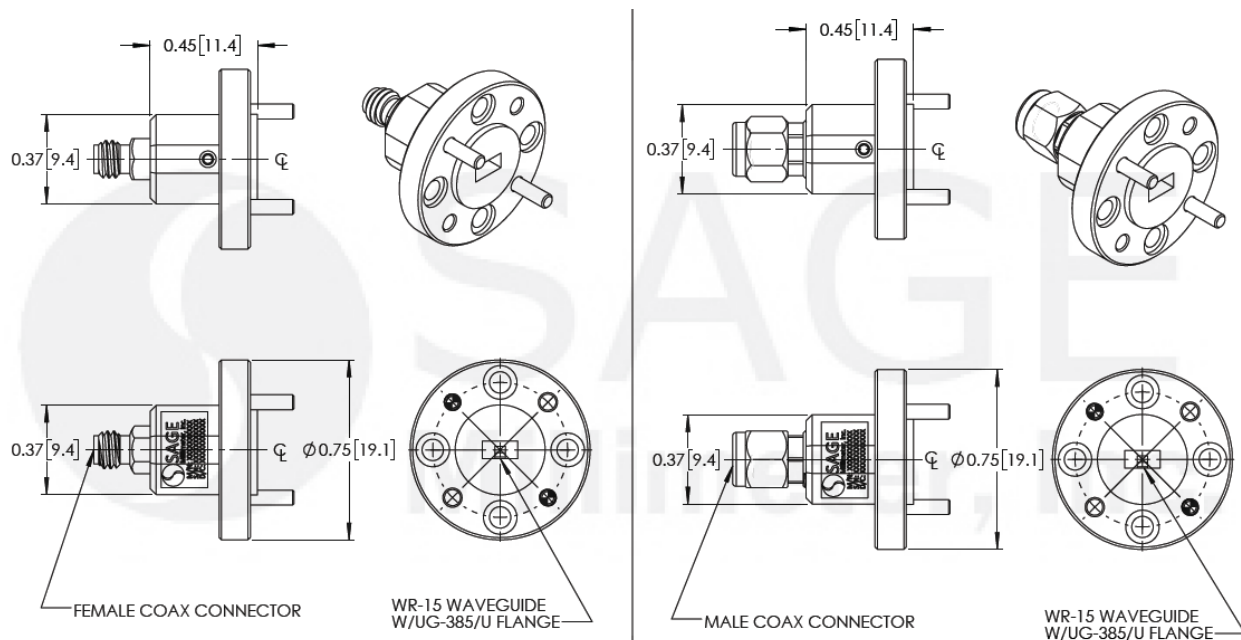

V-Band Waveguide to 1 mm Connector Adapter, End Launch, Non Anti-Cocking

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit slightly.
- All testing was performed under 25°C case temperature.
- Eravant reserves the right to change the information presented without notice.

Caution:

- Any foreign objects in the waveguide will cause performance degradation and may damage the adapter.
- Proper torque, 4.0 ± 0.15 inch-pounds (0.45 ± 0.02 Nm), should be used. **Eravant torque wrench, model SCH-06004-S1, is highly recommended.**

