

## U-Band Waveguide to 1.85mm Connector Adapter, Right Angle

### Description:

Models SWC-19VF-R1-WPC and SWC-19VM-R1-WPC are right angle (90°) U-Band waveguide to coax adapters that cover the frequency range of 40 to 60 GHz. They are designed and manufactured for instrumentation grade quality but offered at a commercial grade price, allowing for an efficient transition between the rectangular waveguide and 1.85 mm (V) coax connector.



### Features:

- Broad Band Coverage
- Lower Insertion Loss and VSWR
- Instrumentation Grade
- DC Open Circuit

### Applications:

- Test Lab
- Instrumentations
- Sub-assemblies

### Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency Range	40 GHz		60 GHz
Insertion Loss		1.3 dB	
Return Loss		12 dB	
Power Handling			40 W (CW)
Specification Temperature		+25 °C	
Operating Temperature	-40 °C		+85 °C


### Mechanical Specifications:

Item	Parameter
Waveguide	WR-19 with UG383/U-M Flange
Coaxial	1.85 mm (V) Female for Model Number: SWC-19VF-R1-WPC
Coaxial	1.85 mm (V) Male for Model Number: SWC-19VM-R1-WPC
Housing Material	Aluminum
Finish	Gold Plated
Weight	0.4 Oz
Outline	WC-UR




## U-Band Waveguide to 1.85mm Connector Adapter, Right Angle

### Typical Performance vs. Frequency

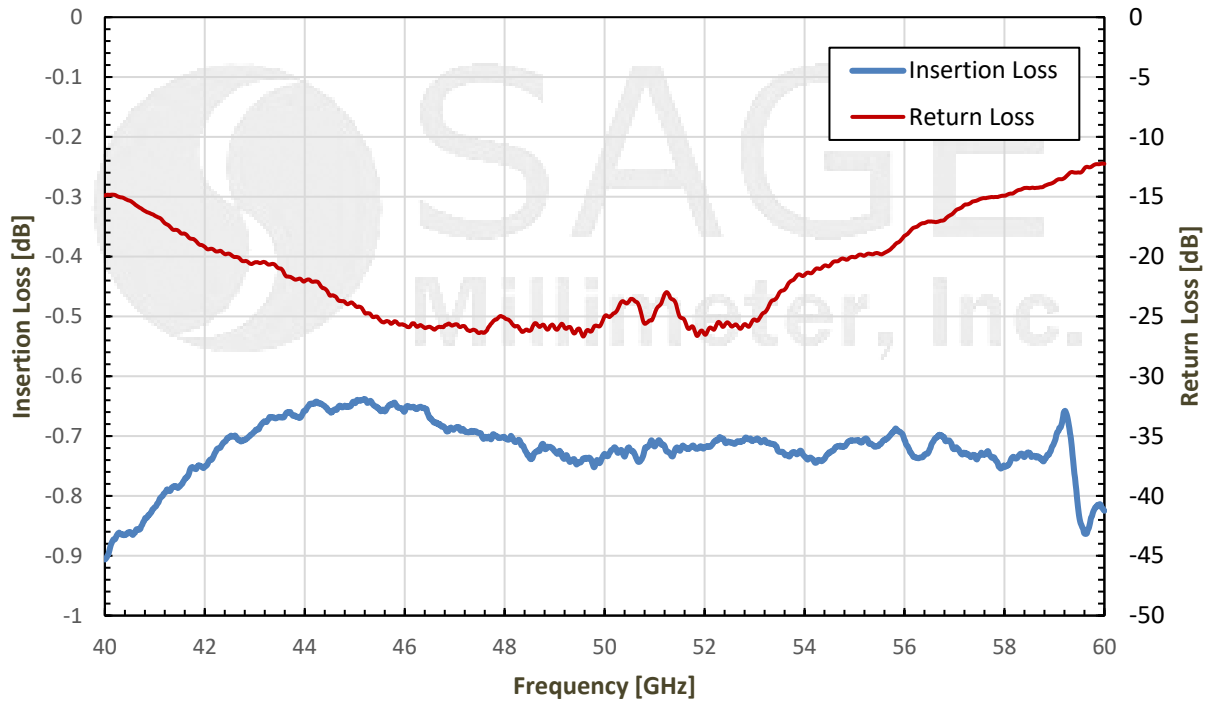

### Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

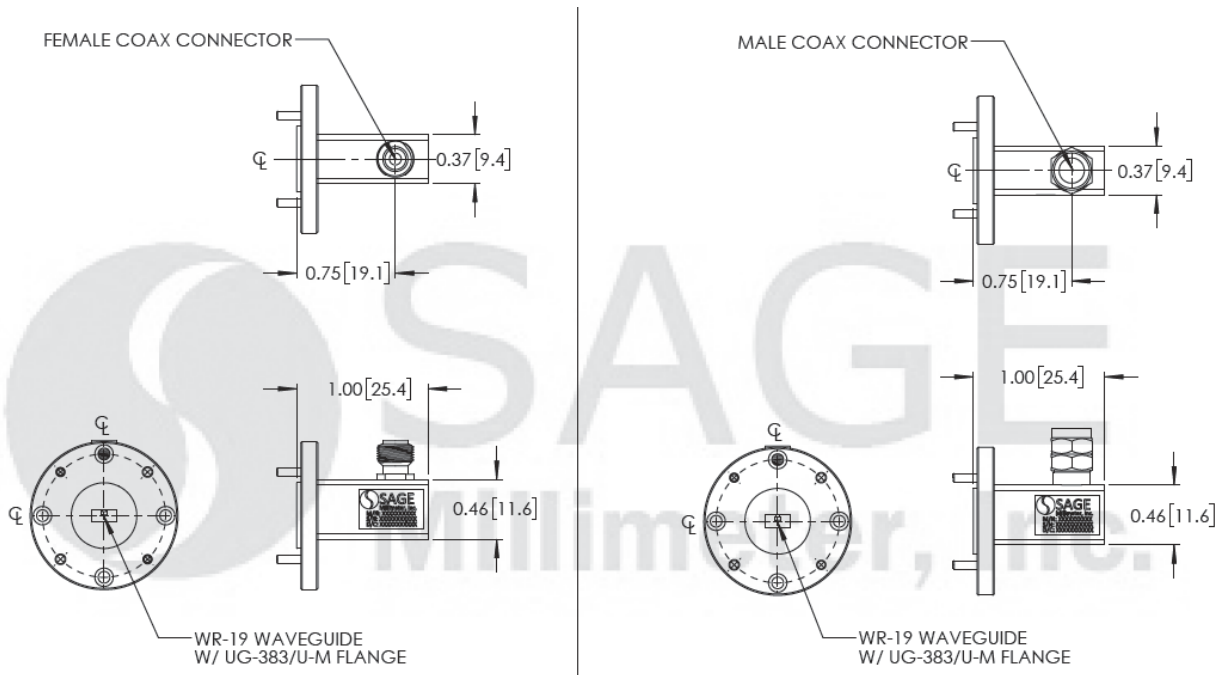



## U-Band Waveguide to 1.85mm Connector Adapter, Right Angle

### Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit, slightly.
- All testing was performed under +25 °C case temperature.
- Eravant reserves the right to change the information presented without notice.

### Caution:

- Any foreign objects in the waveguide will cause performance degradation and may damage the adapter.
- Proper torque,  $8.0 \pm 0.15$  inch-pounds ( $0.90 \pm 0.02$  Nm), should be applied. **Eravant torque wrench, model SCH-08008-S1, is highly recommended.**

