# 

# WR-34 Band Waveguide to 2.92mm Connector Adapter, Right Angle

**SWC-34KF-R1-WP** is a right angle (90°) WR-34 waveguide to coax adapters that cover the frequency range of 22 to 33 GHz. They are designed and manufactured for instrumentation grade quality but offered at a commercial grade price, allowing for an efficient transition between the rectangular waveguide and 2.92 mm (K) coax connector. The end launch (180°) versions are offered under model numbers <a href="SWC-34KF-E1">SWC-34KF-E1</a> and <a href="SWC-34KM-E1">SWC-34KM-E1</a>.



### **Electrical Specifications:**

Parameter	Minimum	Typical	Maximum
Frequency Range	22 GHz		33 GHz
Insertion Loss		0.5 dB	
Return Loss		20 dB	
Power Handling			50 W (CW)
Specification Temperature		+25°C	
Operating Temperature	-40°C		+85°C

## **Mechanical Specifications:**

Item	Specification	
Waveguide	WR-34 Waveguide with UG-1530/U Flange	
Coaxial Port	2.92 mm (K) Female	
Material	Aluminum	
Finish	Gold Plated	
Weight	0.5 Oz	
Outline	WC-3R	

#### **ECCN**

EAR99

#### **FEATURES**

- Broad Band Coverage
- Lower Insertion Loss and VSWR
- Instrumentation Grade
- DC Open Circuit


#### **APPLICATIONS**

- Test Lab
- Instrumentations
- Sub-assemblies

#### SUPPLEMENTAL DETAILS





## **Typical Performance vs. Frequency**

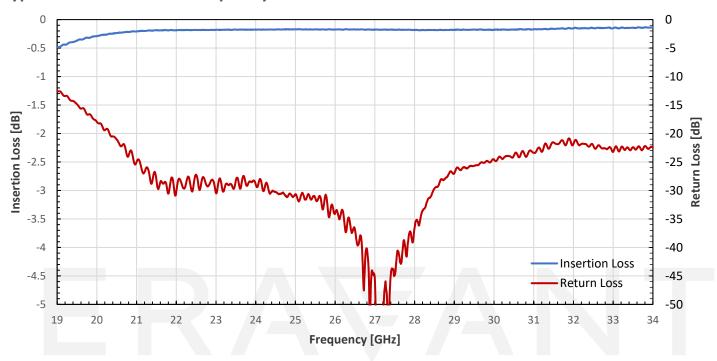

### **Mechanical Outline:**

Unless otherwise specified, all dimensions are in inches [millimeters])



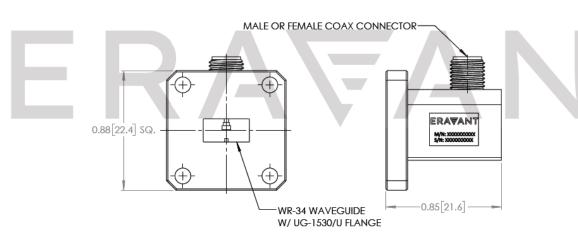



#### NOTE:

- On condition that test data is provided it is collected from a sample lot. Actual data may vary slightly from unit to unit. All testing is performed under +25 °C room temperature.
- On condition that simulated test data is provided, actual measured data may slightly vary.
- Eravant reserves the right to change the information presented without notice.

#### **CAUTION:**

- Any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.
- For 1.35 mm, 1.85 mm, 2.4 mm, 2.92 mm, and SMA connectors proper torque should be applied: 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm). Torque wrench model <u>SCH-08008-S1</u> is highly recommended

# ERAFANT

MAKING MILLIMETERWAVE ACCESSIBLE

# ERAFANT

MAKING MILLIMETERWAVE ACCESSIBLE