

K-Band Waveguide to K Connector Adapter, End Launch

Description:

Models SWC-42KF-E1-2-WPC and SWC-42KM-E1-2-WPC are end launch (180°) K-Band waveguide to coax adapters that cover the frequency range of 18 to 26.5 GHz. They are designed and manufactured for instrumentation grade quality but offered at a commercial grade price, allowing for an efficient transition between the rectangular waveguide and 2.92 mm (K) coax connector.



Features:

- Full Waveguide Band Coverage
- Low Insertion Loss and VSWR
- Instrumentation Grade
- DC Short Circuit

Applications:

- Test Lab
- Instrumentations
- Sub-assemblies

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency Range	18 GHz		26.5 GHz
Insertion Loss		0.75 dB	
Return Loss		16 dB	
Power Handling			50 W (CW)
Specification Temperature		+25 °C	
Operating Temperature	-40 °C		+85 °C


Mechanical Specifications:

Item	Parameter
Waveguide Port	WR-42 with UG-595/U Flange
Coaxial Port	2.92 mm Female for Model Number: SWC-42KF-E1-2-WPC
	2.92 mm Male for Model Number: SWC-42KM-E1-2-WPC
Material	Aluminum
Finish	Gold Plated
Weight	0.4 Oz
Outline	WC-KE




K-Band Waveguide to K Connector Adapter, End Launch

Typical Performance vs. Frequency

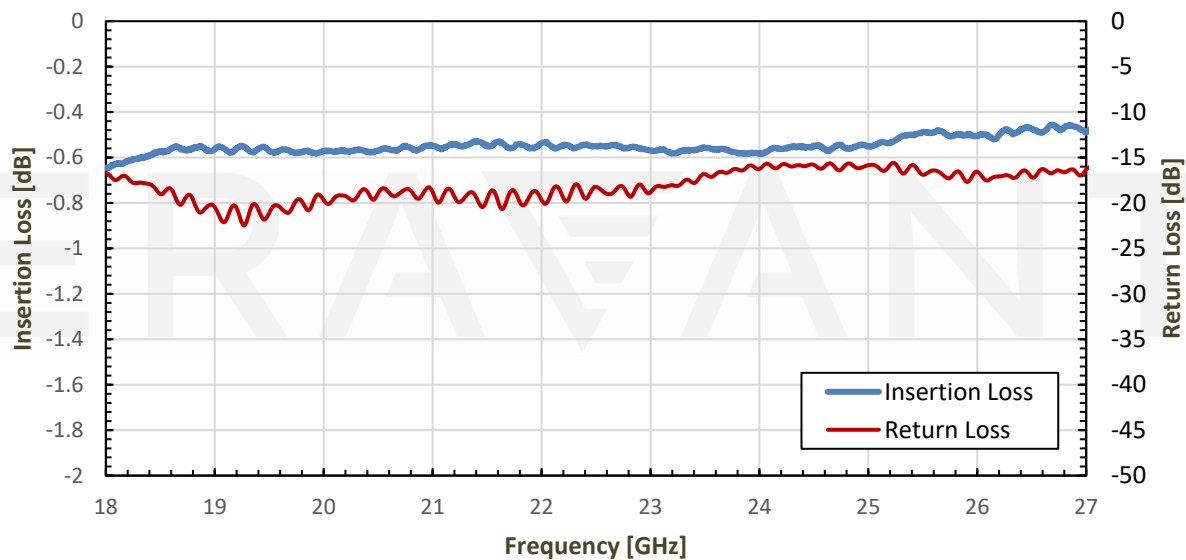

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

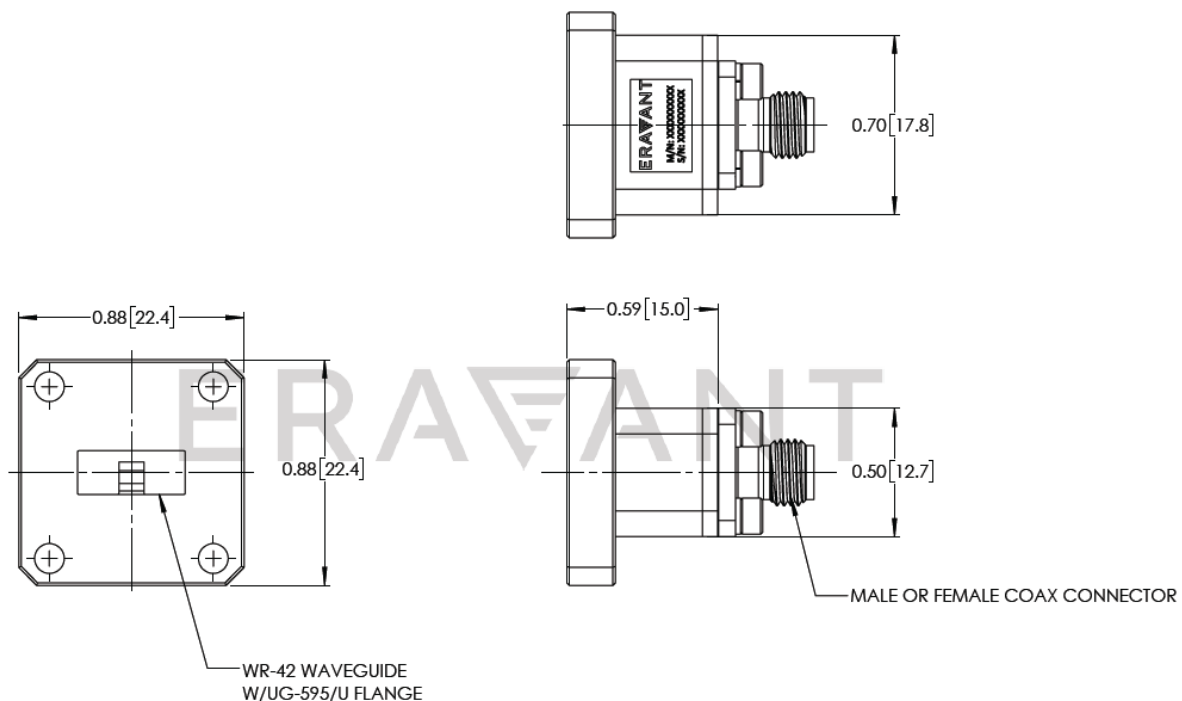

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit, slightly.
- All testing was performed under +25 °C case temperature.
- Eravant reserves the right to change the information presented without notice.



www.eravant.com | 501 Amapola Ave, Torrance, CA 90501
 Phone: 424-757-0168 | Fax: 424-757-0188 | Email: support@eravant.com

K-Band Waveguide to K Connector Adapter, End Launch

Caution:

- Any foreign objects in the waveguide will cause performance degradation and may damage the adapter.
- Proper torque, 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm), should be applied. **Eravant**
- **torque wrench, model SCH-08008-S1, is highly recommended.**

ERAVANT

ERAVANT

