

WRD-650 Waveguide to SMA Connector Adapter, End Launch

SWC-650SM-E1-WRD is an end launch (180°) WRD-650 double ridged waveguide to coax adapter that cover the frequency range of 6.5 to 18 GHz. They are designed and manufactured for instrumentation grade quality but offered at a commercial grade price, allowing for an efficient transition between the double ridged waveguide and SMA coax connector. The right angle (90°) versions are offered under models SWC-650SF-R1-WRD and SWC-650SM-R1-WRD.



Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency Range	6.5 GHz		18 GHz
Insertion Loss		0.3 dB	
Return Loss		20 dB	
Power Handling			100 W (CW)
Specification Temperature		+25°C	
Operating Temperature	-40°C		+85°C

*Insertion loss and return loss is tested back-to-back.

Mechanical Specifications:

Item	Specification
Waveguide Port	WRD-650 Double Ridged Waveguide with FPWRD650D28 Flange
Coaxial Port	SMA Male Connector
Material	Aluminum
Finish	Gold Plated
Weight	2.0 Oz
Outline	WC-650SE-WRD

ECCN

EAR99

FEATURES

- Broad Band Coverage
- Low Insertion Loss and VSWR
- Instrumentation Grade
- DC Short Circuit

APPLICATIONS


- Test Lab
- Instrumentations
- Sub-assemblies

SUPPLEMENTAL DETAILS




SWC-650SM-E1-WRD

Typical Measured Performance vs Frequency

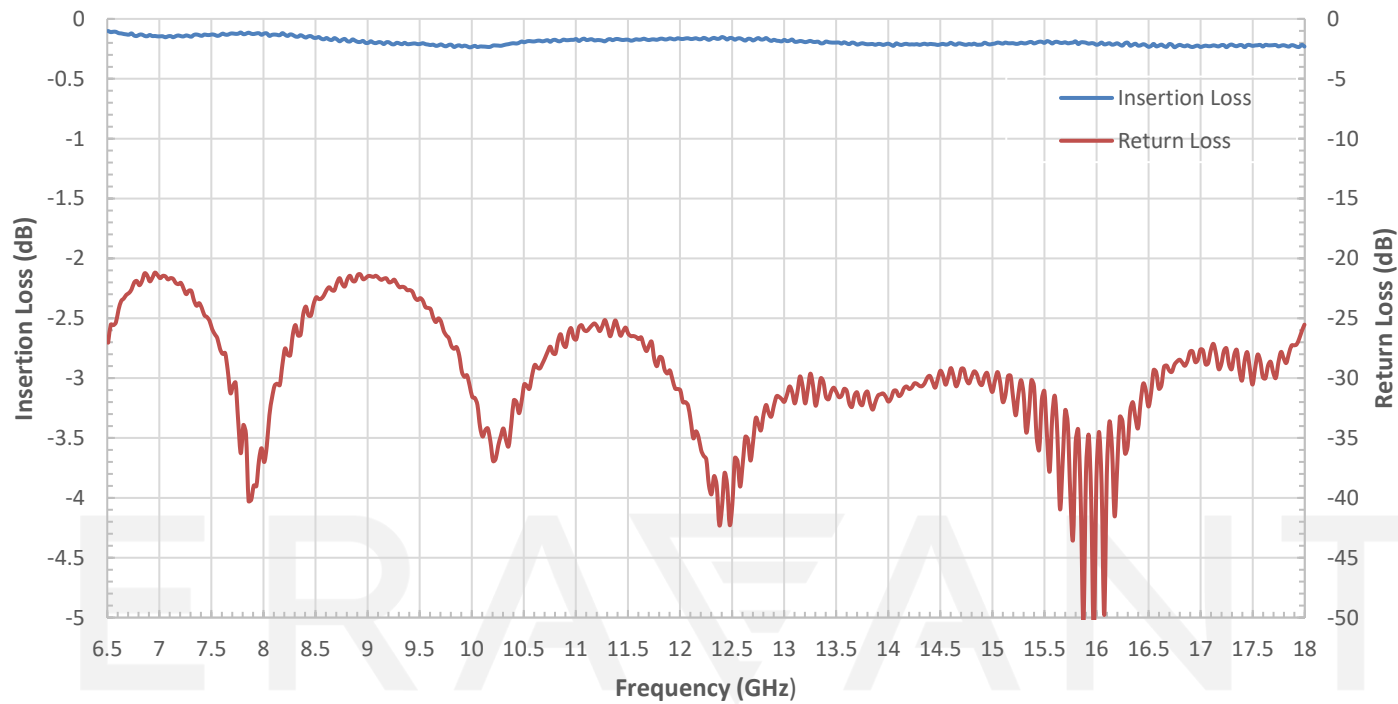

MAKING MILLIMETERWAVE ACCESSIBLE

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

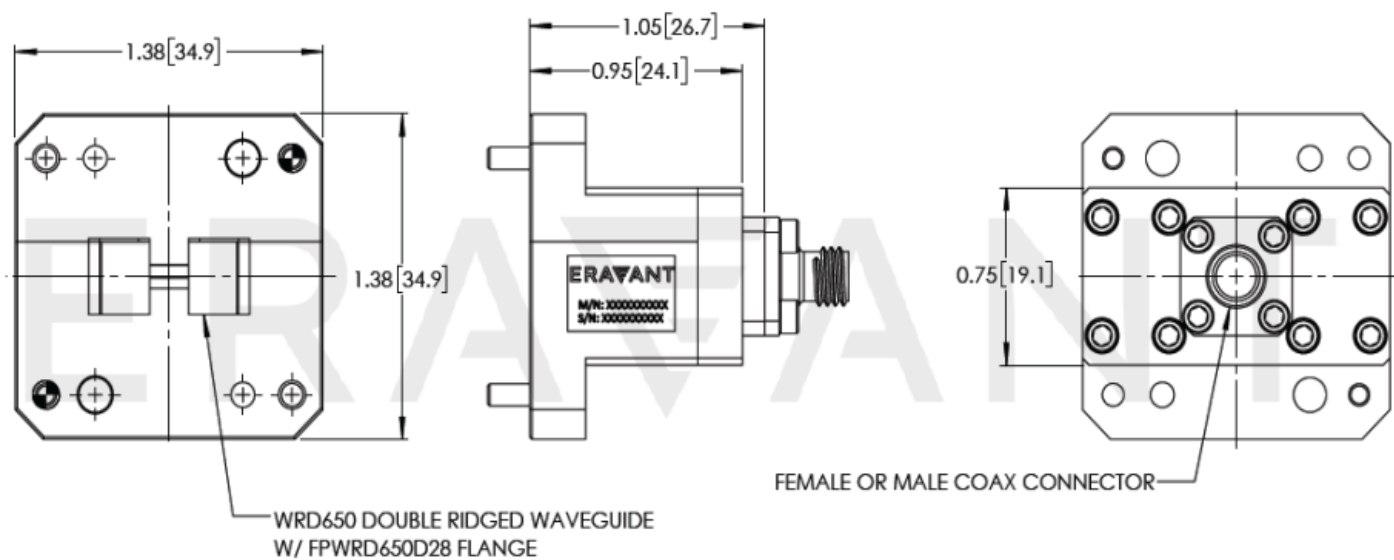

NOTE:

- On condition that test data is provided it is collected from a sample lot. Actual data may vary slightly from unit to unit. All testing is performed under +25 °C room temperature.
- On condition that simulated test data is provided, actual measured data may slightly vary.
- Eravant reserves the right to change the information presented without notice.

CAUTION:

- If a waveguide is present, any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.
- For 1.35 mm, 1.85 mm, 2.4 mm, 2.92 mm, and SMA connectors proper torque should be applied: 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm). Torque wrench model [SCH-08008-S1](#) is highly recommended.

ERAVANT
MAKING MILLIMETERWAVE ACCESSIBLE

ERAVANT
MAKING MILLIMETERWAVE ACCESSIBLE