

WR-04 Waveguide Directional Coupler, 10 dB

Description:

Model SWD-1020H-04-SB is WR-04, three-port waveguide directional coupler that delivers a 10 dB nominal coupling level and 20 dB typical directivity across the full waveguide band from 170 to 260 GHz. The three-port coupler uses a traditional multi-hole and split block design to achieve a flat coupling level, and low insertion loss. The interfaces of the coupler are WR-04 waveguides with UG-387/U-M anti-cocking flanges. Custom coupling levels are available under different model numbers.



Features:

- Full Band Operation
- Low Insertion Loss
- High Directivity

Applications:

- Test Labs
- Instrumentation
- Sub-assemblies

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	170 GHz		260 GHz
Insertion Loss*		3.0 dB	
Coupling*	, // N	10 dB	
Directivity*		20 dB	
Return Loss	1) /	18 dB	
Specification Temperature		+25 °C	
Operating Temperature	-40 °C		+85 °C

^{*}The definition of insertion loss, coupling and directivity is show below. The required termination on the waveguide port is 30 dB or better for accurate measurement.

Insertion Loss = -10 $log_{10}[(P2+P3)/P1]$ P1 Coupling Value = -10 $log_{10}[P3/P1]$ P2

Isolation = -10 log₁₀ [P3/P2] P1

Directivity = Isolation – Coupling Value



www.eravant.com | 501 Amapola Ave, Torrance, CA 90501 Phone: 424-757-0168 | Fax: 424-757-0188 | Email: support@eravant.com




WR-04 Waveguide Directional Coupler, 10 dB


Mechanical Specifications:

Item	Specification	
RF Ports	WR-04 Waveguide with UG-387/U-M Anti-Cocking Flange	
Material	Brass	
Finish	Gold Plated	
Weight	4.0 oz.	
Outline	WD-SB-04-A	



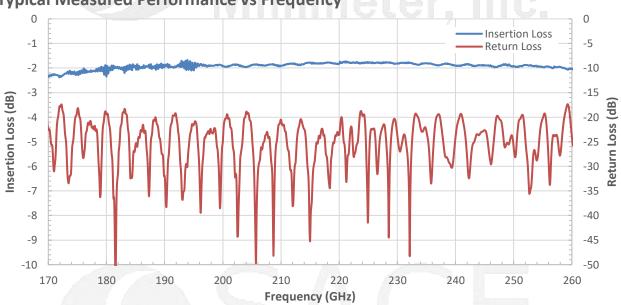

Typical Measured Performance vs Frequency

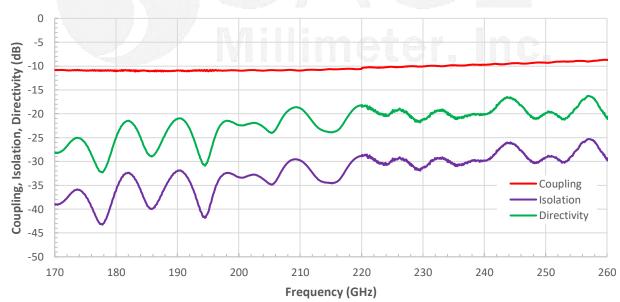




www.eravant.com | 501 Amapola Ave, Torrance, CA 90501 Phone: 424-757-0168 | Fax: 424-757-0188 | Email: support@eravant.com



Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

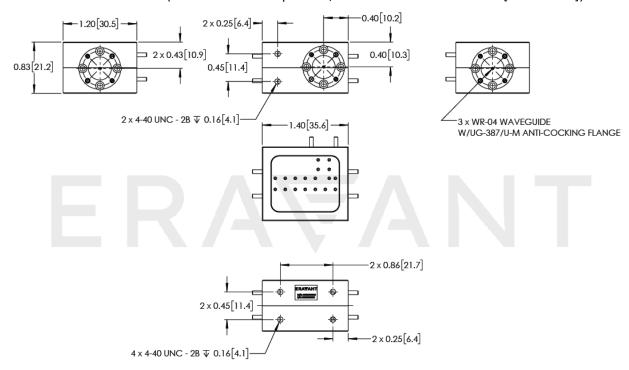

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit, slightly.
- All testing was performed under +25 °C case temperature.
- Eravant reserves the right to change the information presented without notice.

Caution:

Any foreign objects in the waveguide will degrade performance and/or damage the device.



www.eravant.com | 501 Amapola Ave, Torrance, CA 90501 Phone: 424-757-0168 | Fax: 424-757-0188 | Email: support@eravant.com