

## Q-Band Waveguide Directional Coupler, 10 dB

### Description:

**Model SWD-1040H-22-SB** is a Q band three-port waveguide directional coupler that delivers a 10 dB nominal coupling level and 35 dB minimum directivity across the full waveguide band from 33 to 50 GHz. The three-port coupler uses a traditional multi-hole and split block design to achieve flat coupling level, high directivity, and low insertion loss. The interfaces of the coupler are WR-22 waveguides with UG-383/U anti-cocking flanges. Custom coupling levels are available under different model numbers.



### Features:

- Full Band Operation
- Low Insertion Loss
- High Directivity

### Applications:

- Test Labs
- Instrumentation
- Sub-assemblies

### Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	33 GHz		50 GHz
Insertion Loss*		0.6 dB	
Coupling*		10 dB	
Directivity*	35 dB		
VSWR			1.10:1
Specification Temperature		+25°C	
Operating Temperature	-40°C		+85°C

\*The definition of the insertion loss, coupling and directivity is show as following. The required termination on the waveguide port is 30 dB or better for accurate measurement.


<p>Insertion Loss = <math>-10 \log_{10} [(P2+P3)/P1]</math></p> <p>Coupling Value = <math>-10 \log_{10} [P3/P1]</math></p>	
<p>Isolation = <math>-10 \log_{10} [P3/P2]</math></p> <p>Directivity = Isolation – Coupling Value</p>	

## Q-Band Waveguide Directional Coupler, 10 dB

### Mechanical Specifications:

Item	Specification
Through Ports	WR-22 Waveguide with UG-383/U Anti-Cocking Flange
Coupled Port	WR-22 Waveguide with UG-383/U Anti-Cocking Flange
Size	5.50" (L) X 1.30" (W) x 1.25" (H)
Material	Brass
Finish	Gold Plated
Weight	1.58 Lb
Outline	WD-SB-Q-A

### Typical Coupling and Insertion Loss vs. Frequency

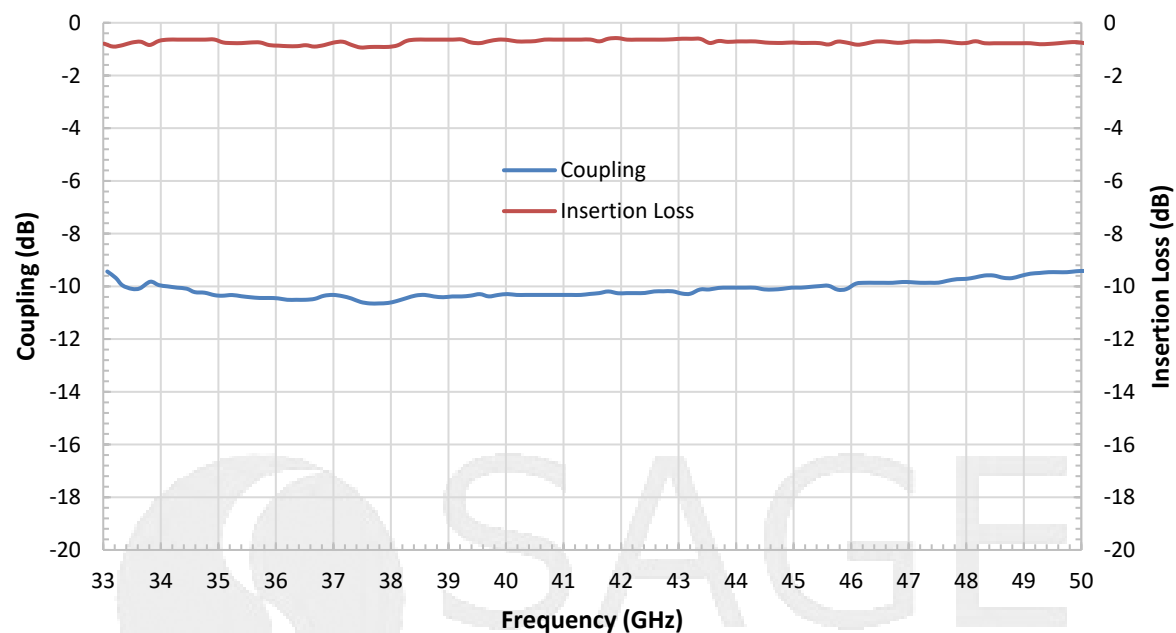


\*Insertion loss includes circuit loss



## Q-Band Waveguide Directional Coupler, 10 dB

**Mechanical Outline:** (Unless otherwise specified, all dimensions are in inches [millimeters])

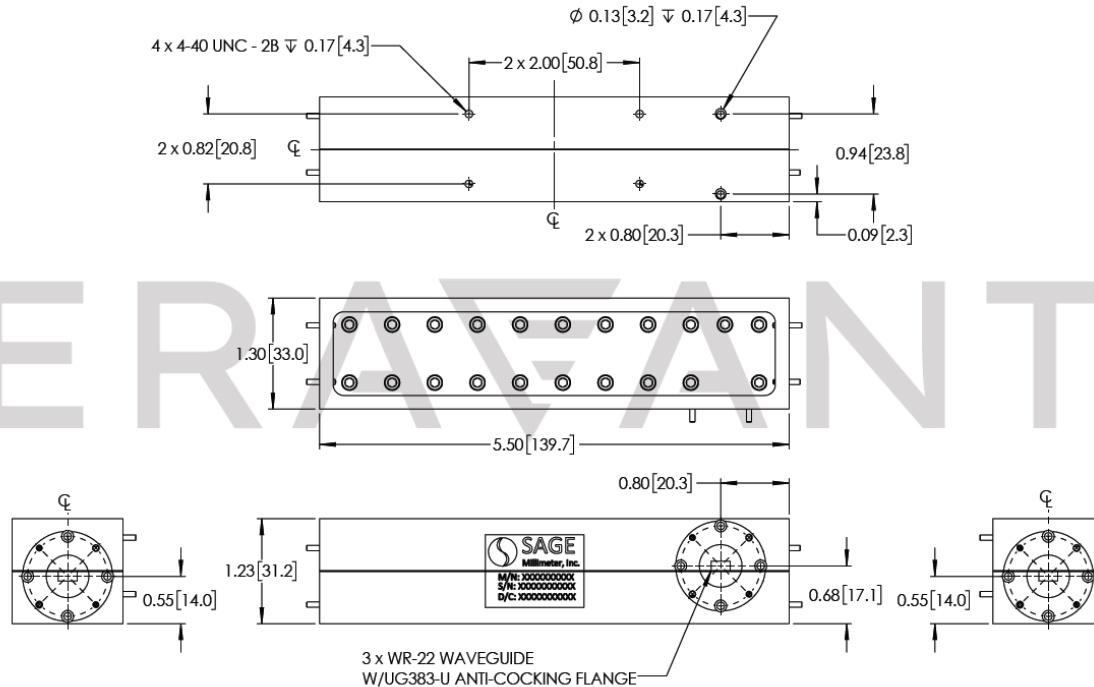

### Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit, slightly.
- All testing was performed under +25 °C case temperature.
- The insertion loss shown includes the loss due to coupling.
- Eravant reserves the right to change the information presented without notice.

### Caution:

- Any foreign objects in the waveguide will degrade performance and/or damage the device.