

SWD-3040H-15-DB

V-Band Waveguide Dual-Directional Coupler, 30 dB

SWD-3040H-15-DB is a V-band, four-port waveguide dual-directional coupler that delivers a 30 dB nominal coupling level and 40 dB typical directivity across the full waveguide band from 50 to 75 GHz. The dual-directional coupler uses a traditional multi-hole and split block design to achieve a flat coupling level, high directivity, and low insertion loss. The waveguide interface of the coupler is WR-15 waveguides with UG-385/U Anti-Cocking flanges. Other coupling levels including custom coupling levels and asymmetrical forward/reverse coupling levels are available under different model numbers.



Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency Range	50 GHz		75 GHz
Insertion Loss*		1.1 dB	
Coupling*		30 dB	
Directivity*		40 dB	
Return Loss		25 dB	
Specification Temperature		+25°C	
Operating Temperature	-40°C		+85°C

*The definition of the insertion loss, coupling and directivity is shown as following.
The required termination on the waveguide port is 30 dB or better for accurate measurement.

*The actual directivity and return loss are higher than shown due to the limitations of the network analyzer's dynamic range.

*Performance may be reduced at band edges.

Mechanical Specifications:

Item	Specification
RF Ports	WR-15 Waveguide with UG-385/U Anti-Cocking Flange
Material	Brass
Finish	Gold Plated
Weight	1.3 lbs.
Outline	WD-DB-V-A

ECCN

EAR99

FEATURES

- Full Band Coverage
- Low Insertion Loss
- High Directivity
- Flat Coupling Level Across the Band

APPLICATIONS


- Test Lab
- Instrumentations
- System Integration

SUPPLEMENTAL DETAILS




SWD-3040H-15-DB

Insertion Loss = $-10 \log_{10} [(P2+P3)/P1]$ when P4 is terminated.
 Coupling Value = $-10 \log_{10} [P3/P1]$ when P4 is terminated.
 or $-10 \log_{10} [P4/P2]$ when P3 is terminated.

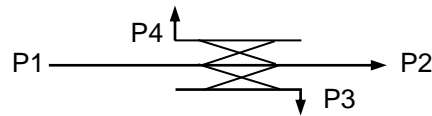


Directivity = $-10 \log_{10} [P3/P2]$ when P1 and P4 are terminated.

Directivity = $-10 \log_{10} [P4/P1]$ when P2 and P4 are terminated.

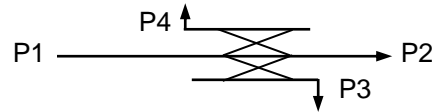


Mechanical Outline:

Unless otherwise specified, all dimensions are in inches [millimeters]

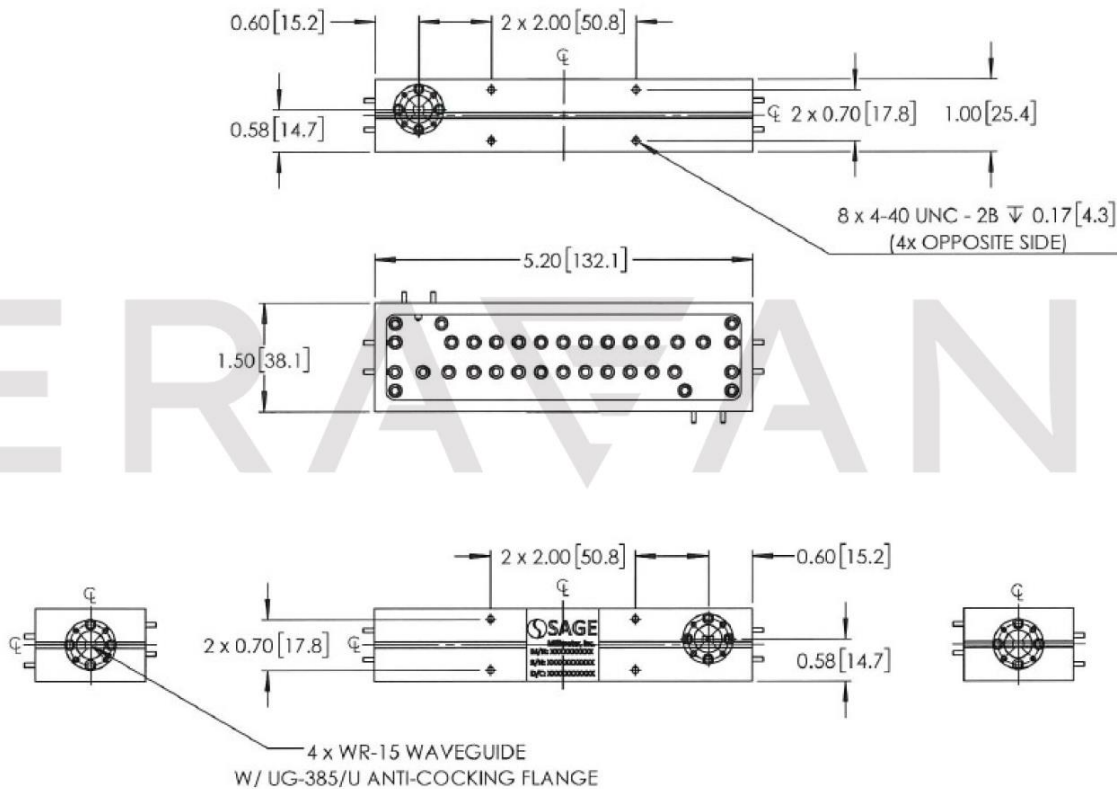

SWD-3040H-15-DB

Typical Performance Vs Frequency

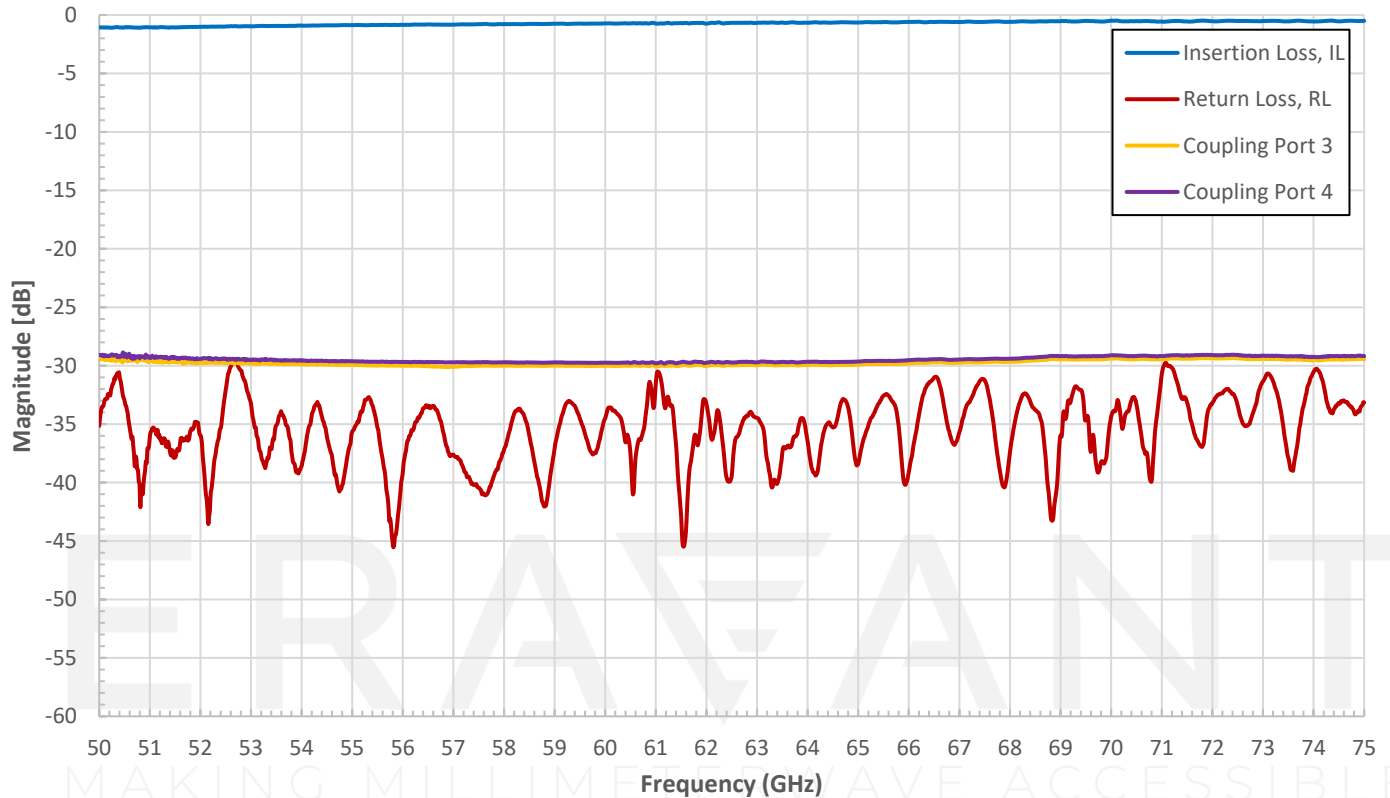

NOTE:

- On condition that test data is provided it is collected from a sample lot. Actual data may vary slightly from unit to unit. All testing is performed under +25 °C room temperature.
- On condition that simulated test data is provided, actual measured data may slightly vary.
- Eravant reserves the right to change the information presented without notice.

CAUTION:

- If a waveguide is present, any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.