

SWF-21420340-05-B1

Waveguide Bandpass Filter, G Band, 200 to 220 GHz

SWF-21420340-05-B1 is an WR-05 waveguide bandpass filter with a passband frequency of 200 to 220 GHz. The bandpass filter has rejection frequencies from DC to 189 GHz with a typical rejection of 40 dB and 240 to 280 GHz with a typical rejection of 30 dB. The nominal insertion loss of the bandpass filter is 1.4 dB. Since both low end and high end cut off frequencies can be selected by modifying the design, custom designs are available under different model numbers.



Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Passband Frequency Range	200 GHz		220 GHz
Passband Insertion Loss		1.4 dB	
Rejection Frequency, Low Side	DC		189 GHz
Rejection Frequency, High Side	240 GHz		280 GHz
Rejection, Low Side		40 dB	
Rejection, High Side		30 dB	
Passband Return Loss		14 dB	
Specification Temperature		+25°C	
Operating Temperature	-40°C		+85°C

Mechanical Specifications:

Item	Specification
Waveguide	WR-05 Waveguide with UG-387/U-M Anti-Cocking Flange
Material	Brass
Finish	Gold Plated
Weight	1.1 Oz
Outline	WF-BG-A-0.5

ECCN

EAR99

FEATURES

- Low Cost
- Low Insertion Loss
- High Rejection


APPLICATIONS

- Communication Systems
- Radar Systems
- Sub-assemblies


SUPPLEMENTAL DETAILS



Typical Rejection vs. Frequency

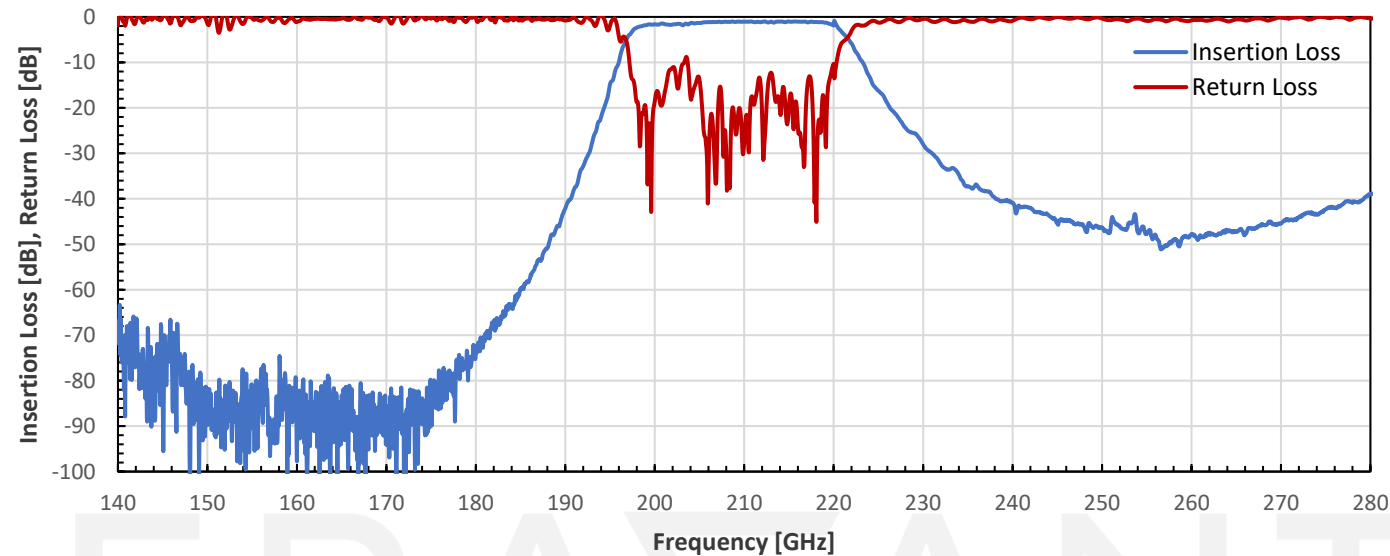

Mechanical Outline:
Unless otherwise specified, all dimensions are in inches [millimeters]

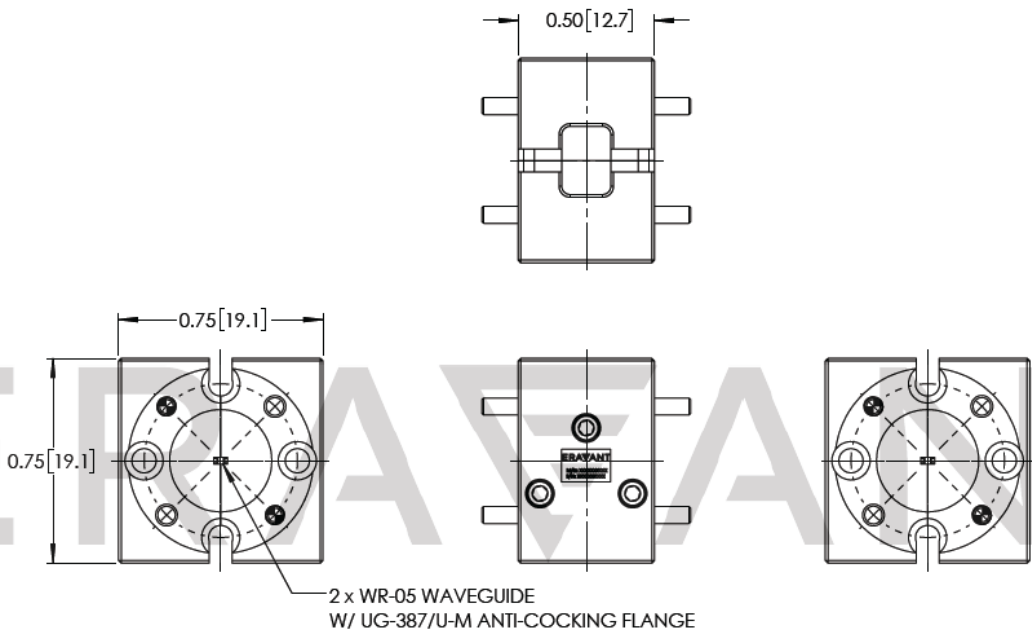

NOTE:

- On condition that test data is provided it is collected from a sample lot. Actual data may vary slightly from unit to unit. All testing is performed under +25 °C room temperature.
- On condition that simulated test data is provided, actual measured data may slightly vary.
- Eravant reserves the right to change the information presented without notice.

CAUTION:

- If a waveguide is present, any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.

ERAVANT
MAKING MILLIMETERWAVE ACCESSIBLE

ERAVANT
MAKING MILLIMETERWAVE ACCESSIBLE