

SWG-05010-FB

WR-05 Straight Waveguide Section, 1"

SWG-05010-FB is a 1" long, G-band straight waveguide section with a WR-05 waveguide and UG-387/U-M anti-cocking flanges. The straight waveguide is manufactured with a precision machining process to ensure high quality and ruggedness. The waveguide is offered to cover the frequency range of 140 to 220 GHz.



Mechanical Specifications:

Item	Specification
Waveguide Size	WR-05 Waveguide with UG-387/U-M Anti-Cocking Flange
Insertion Length	1.0"
Flange Material	Brass
Waveguide Material	Copper
Finish	Gold Plated
Weight	0.6 Oz
Outline	WG-FG-A-L

ECCN

EAR99

FEATURES

- Frequency Range: 140 to 220 GHz
- Rugged Waveguide Configuration
- Low Insertion Loss

APPLICATIONS


- Test Instrumentation
- Sub-assemblies

SUPPLEMENTAL DETAILS



SWG-05010-FB

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

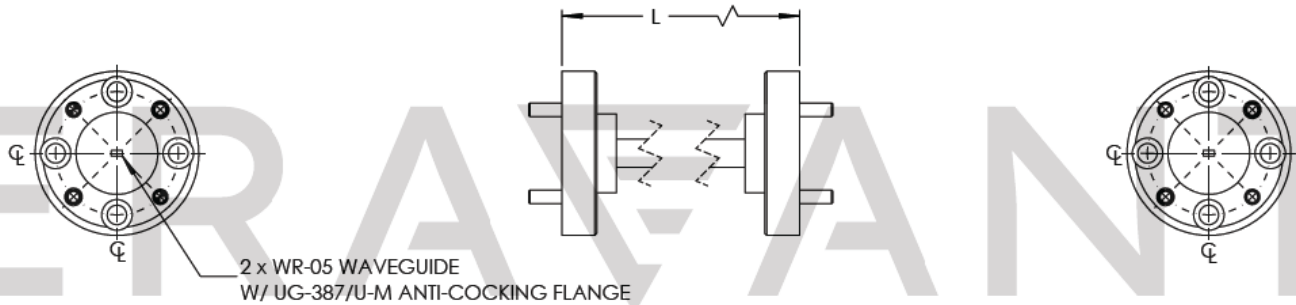

NOTE:

- Eravant reserves the right to change the information presented without notice.

CAUTION:

- Any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.

ERAVANT
MAKING MILLIMETERWAVE ACCESSIBLE

ERAVANT
MAKING MILLIMETERWAVE ACCESSIBLE