

# WR-08 Straight Waveguide Section, 0.5"

**SWG-08005-FB** is a 0.5" long, F-band straight waveguide section with a WR-08 waveguide and UG-387/U-M anti-cocking flanges. The straight waveguide is manufactured with a precision machining process to ensure high quality and ruggedness. The waveguide is offered to cover the frequency range of 90 to 140 GHz.



**Mechanical Specifications:** 

Item	Specification
Waveguide Size	WR-08 Waveguide with UG-387/U-M Anti-Cocking Flange
Insertion Length	0.5"
Flange Material	Brass
Waveguide Material	Copper
Finish	Gold Plated
Weight	0.6 Oz
Outline	WG-FF-A-L

#### **ECCN**

EAR99

### **FEATURES**

- Frequency Range: 90 to 140 GHz
- Rugged Waveguide Configuration
- Low Insertion Loss

#### **APPLICATIONS**

- Test Instrumentation
- Sub-assemblies


**SUPPLEMENTAL DETAILS** 

MAKING MILLIMETERWAV<mark>E ACCESSIBL</mark>





Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

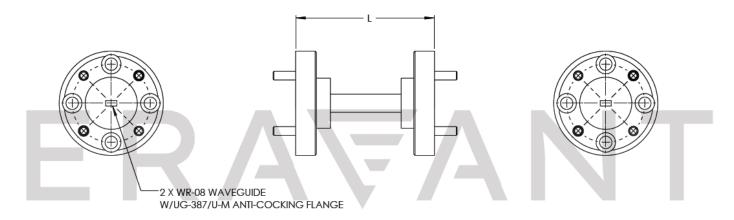

## NOTE:

Eravant reserves the right to change the information presented without notice.

#### CAUTION:

 If a waveguide is present, any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.

MAKING MILLIMETERWAVE ACCESSIBLE

# ERAFANT

MAKING MILLIMETERWAVE ACCESSIBLE