

WR-08 Straight Waveguide Section, 1", Precision Machined

Description:

Model SWG-08010-F1 is a 1" long, WR-08 straight waveguide section with UG-387/U-M Anti-Cocking flanges. The waveguide straight covers the frequency range of 90 to 140 GHz. The waveguide straight is manufactured with precision machining as a split-block body, which results in a robust, reinforced mechanical structure that will not flex or bend compared to traditional waveguide sections made with thin-wall tubing and brazed joints. Other lengths are available under different model numbers.



Features:

- Frequency Range: 90 to 140 GHz
- Sturdy Split-Block Mechanical Structure

Applications:

- Test Instrumentation
- Sub-assemblies

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	90 GHz		140 GHz
Insertion Loss		0.7 dB	
Return Loss		25 dB	
Specification Temperature		+25 °C	
Operating Temperature	-40 °C		+85 °C


Mechanical Specifications:

Item	Specification
Waveguide Size	WR-08 Waveguide with UG-387/U-M Anti-Cocking Flange
Insertion Length (L)	1.0"
Material	Brass
Finish	Gold Plated
Weight	1.0 oz.
Outline	WG-FF-A-SB-L



WR-08 Straight Waveguide Section, 1", Precision Machined

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

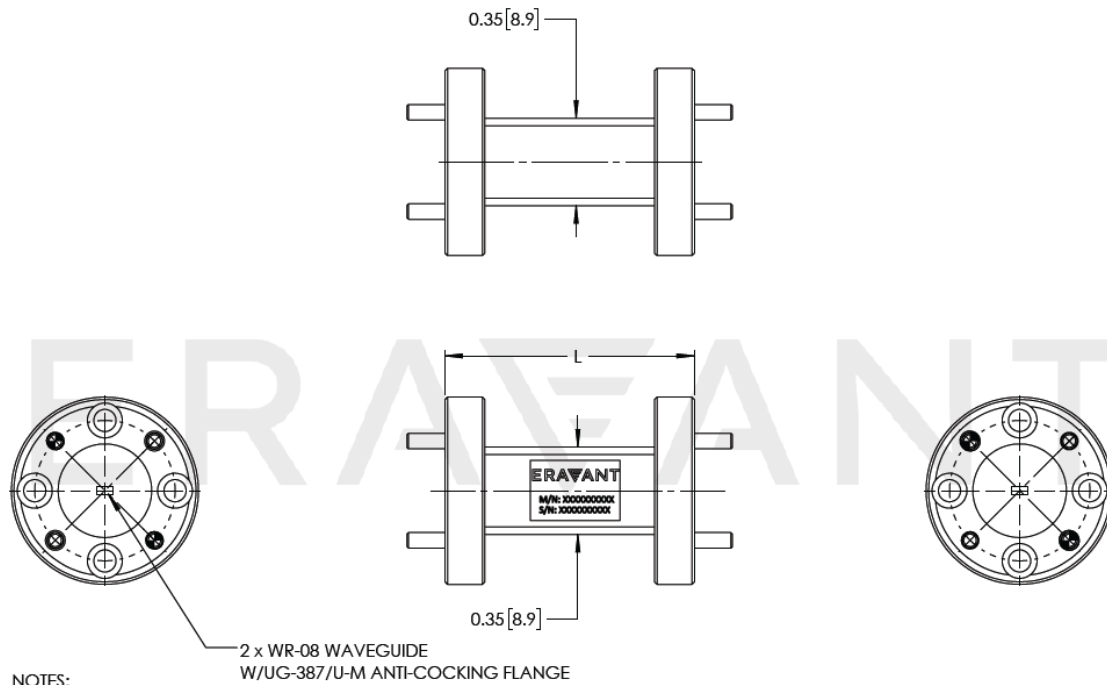

NOTES:

LENGTH "L" IS CUSTOMIZABLE

Note:

- Eravant reserves the right to change the information presented without notice.

ERAVANT

