

# WR-15 Straight Waveguide Section, 2.25"

**SWG-15023-FB-2.25** is a 2.25" long, V-band straight waveguide section with a WR-15 waveguide and UG-385/U circular flanges. The straight waveguide is manufactured with a precision machining process to ensure high quality and ruggedness. The waveguide is offered to cover the frequency range of 50 to 75 GHz.



# **Mechanical Specifications:**

Item	Specification
Waveguide Size	WR-15 Waveguide with UG-385/U Flange
Insertion Length	2.25"
Flange Material	Brass
Waveguide Material	Copper
Finish	Gold Plated
Weight	0.7 Oz
Outline	WG-FV-L

## **ECCN**

EAR99

# **FEATURES**

- Frequency Range: 50 to 75 GHz
- Rugged Waveguide Configuration
- Low Insertion Loss

## **APPLICATIONS**

- Test Instrumentation
- Low Insertion Loss


#### SUPPLEMENTAL DETAILS

ERAF AND MALL IN ETERWAYE ACC





Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

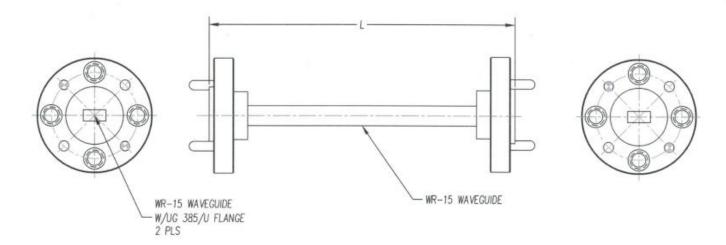

### NOTE:

- On condition that test data is provided it is collected from a sample lot. Actual data may vary slightly from unit to unit. All
  testing is performed under +25 °C room temperature.
- On condition that simulated test data is provided, actual measured data may slightly vary.
- Eravant reserves the right to change the information presented without notice.

#### **CAUTION:**

 If a waveguide is present, any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.

# ERAFANT

MAKING MILLIMETERWAVE ACCESSIBLE