

SWG-15030-FB

WR-15 Straight Waveguide Section, 3"

SWG-15030-FB is a 3" long, V-band straight waveguide section with a WR-15 waveguide and UG-385/U anti-cocking flanges. The straight waveguide is manufactured with a precision machining process to ensure high quality and ruggedness. The waveguide is offered to cover the frequency range of 50 to 75 GHz.



Mechanical Specifications:

Item	Specification
Waveguide Size	WR-15 Waveguide with UG-385/U Anti-Cocking Flange
Insertion Length	3.0"
Flange Material	Brass
Waveguide Material	Copper
Finish	Gold Plated
Weight	0.8 Oz
Outline	WG-FV-A-L

ECCN

EAR99

FEATURES

- Frequency Range: 50 to 75 GHz
- Rugged Waveguide Configuration
- Low Insertion Loss

APPLICATIONS


- Test Instrumentation
- Sub-assemblies

SUPPLEMENTAL DETAILS



SWG-15030-FB

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

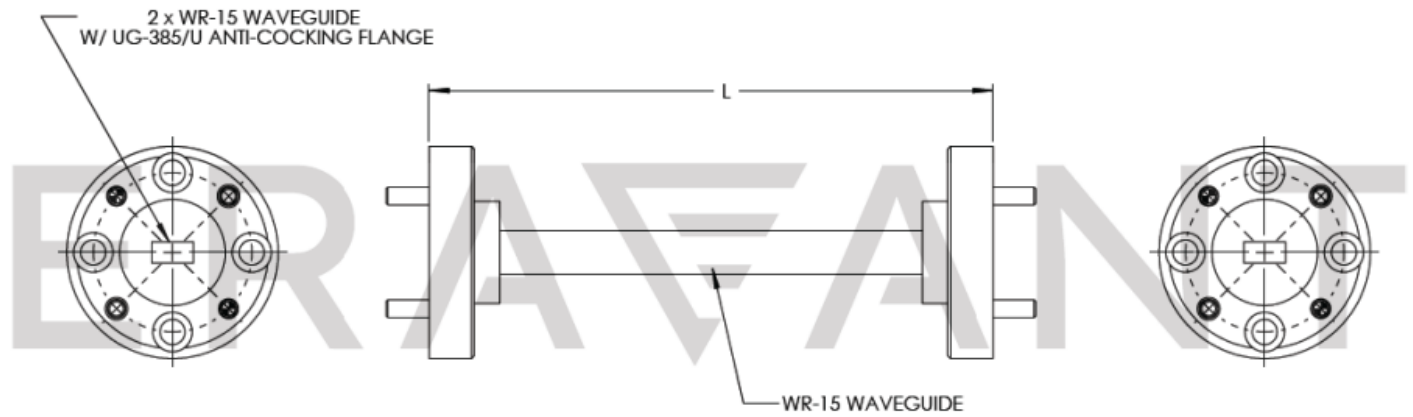

NOTE:

- On condition that test data is provided it is collected from a sample lot. Actual data may vary slightly from unit to unit. All testing is performed under +25 °C room temperature.
- On condition that simulated test data is provided, actual measured data may slightly vary.
- Eravant reserves the right to change the information presented without notice.

CAUTION:

- If a waveguide is present, any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.

ERAVANT
MAKING MILLIMETERWAVE ACCESSIBLE