SWG-19010-FB-WP

WR-19 Straight Waveguide Section, 1”

SWG-19010-FB-WP is a 1” long, U-band straight waveguide section with a WR-19 waveguide with UG-383/U-M anti-cocking flanges. The straight waveguide is manufactured with a precision machining process to ensure high quality and ruggedness. The waveguide is offered to cover the frequency range of 40 to 60 GHz.



Mechanical Specifications:

Item	Specification
Waveguide Size	WR-19 Waveguide with UG-383/U-M Anti-Cocking Flange
Setting Type	Micrometer Head
Insertion Length	1.0”
Flange Material	Brass
Waveguide Material	Copper
Finish	Gold Plated
Weight	1.4 Oz
Outline	WG-FU-A-L

ECCN

EAR99

FEATURES

- Frequency Range: 40 to 60 GHz
- Rugged Waveguide Configuration
- Low Insertion Loss

APPLICATIONS

- Test Instrumentation
- Sub-assemblies

SUPPLEMENTAL DETAILS

Copyright © 2023 by Eravant

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

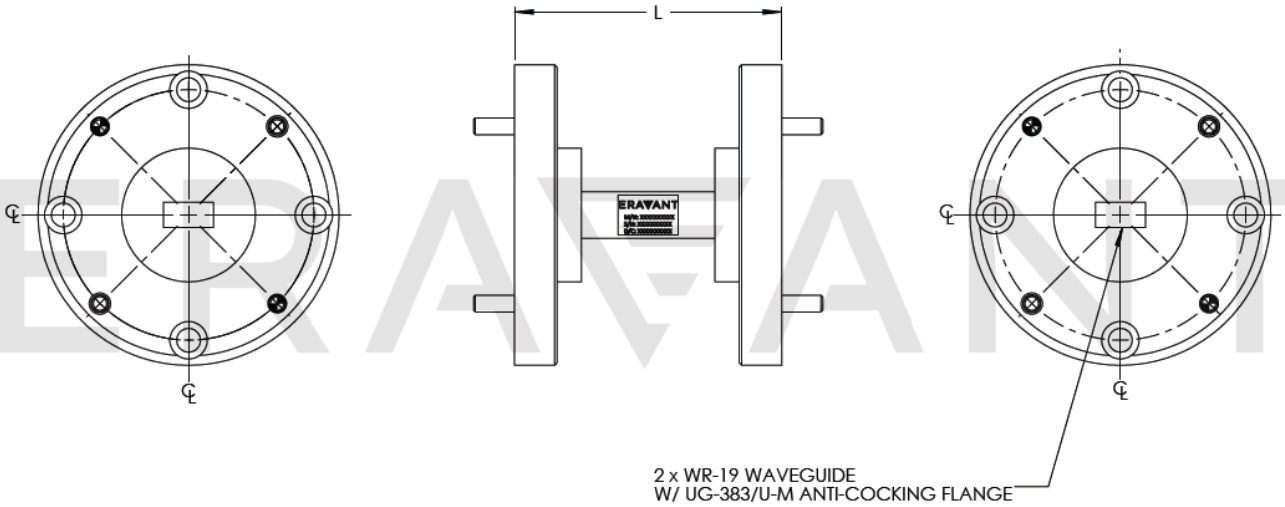

NOTE:

- Eravant reserves the right to change the information presented without notice.

MAKING MILLIMETERWAVE ACCESSIBLE

Copyright © 2023 by Eravant