

SWG-219010-FB

0.219" Diameter Circular Waveguide Straight Section, 1.0" Long

Model SWG-219010-FB is a 1.0" long, 0.219" Diameter Circular Waveguide straight section with UG-383/U-M Anti-Cocking flanges. The waveguide straight section is manufactured with a precision machining process to ensure high quality and ruggedness. The waveguide straight section is offered to cover the frequency range of 38.5 to 43 GHz.



Mechanical Specifications:

Item	Specification
Waveguide Size	0.219" Diameter Circular Waveguide with UG-383/U-M Anti-Cocking Flanges
Insertion Length	1.0"
Material	Brass
Finish	Gold Plated
Weight	0.8 Oz
Outline	WG-FQ-219-A-L

ECCN

EAR99

FEATURES

- Frequency Range: 38.5 to 43 GHz
- Rugged Waveguide Configuration
- Low Insertion Loss

APPLICATIONS

- Test Instrumentation
- Sub-assemblies


SUPPLEMENTAL DETAILS



SWG-219010-FB

Mechanical Outline:

Unless otherwise specified, all dimensions are in inches [millimeters])

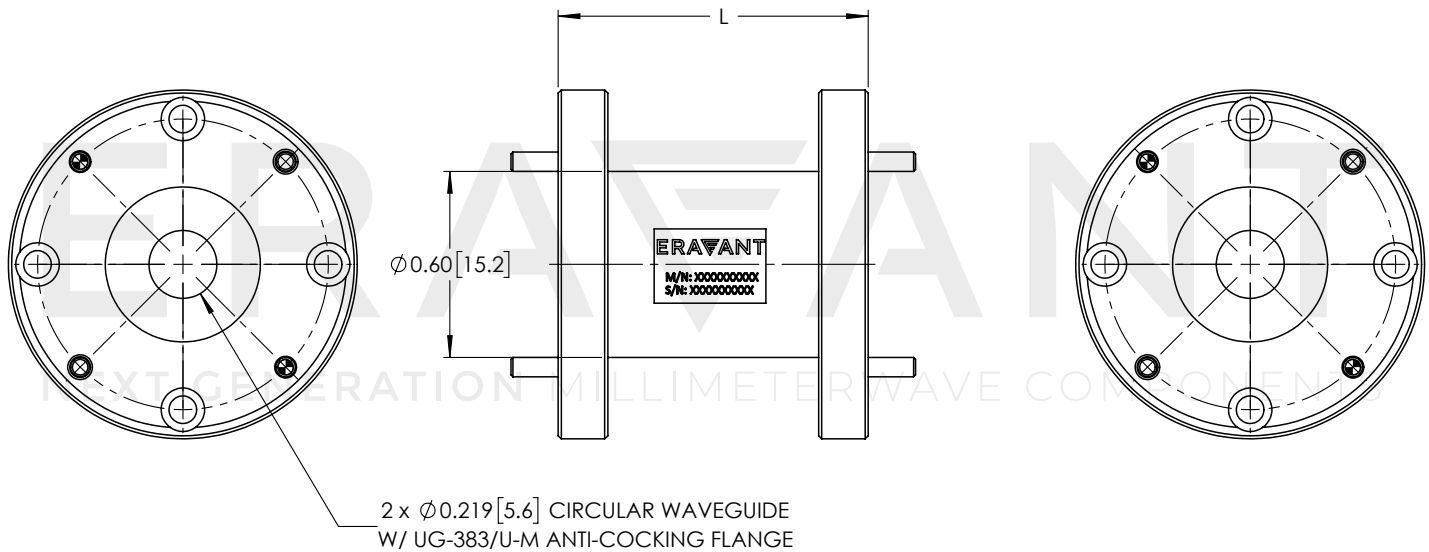

NOTE:

LENGTH "L" IS CUSTOMIZABLE

NOTE:

- On condition that test data is provided it is collected from a sample lot. Actual data may vary slightly from unit to unit. All testing is performed under +25 °C room temperature.
- On condition that simulated test data is provided, actual measured data may slightly vary.
- Eravant reserves the right to change the information presented without notice.

CAUTION:

- If a waveguide is present, any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.
- For 1 mm connectors proper torque should be applied: 4.0 ± 0.15 inch-pounds (0.45 ± 0.02 Nm). Torque wrench model [SCH-06004-S1](#) is highly recommended.
- For 1.35 mm, 1.85 mm, 2.4 mm, 2.92 mm, and SMA connectors proper torque should be applied: 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm). Torque wrench model [SCH-08008-S1](#) is highly recommended.