

SWG-28010-FB

WR-28 Straight Waveguide Section, 1"

SWG-28010-FB is a 1" long, Ka-band straight waveguide section with a WR-28 waveguide and UG-599/U square flanges. The straight waveguide is manufactured with a precision machining process to ensure high quality and ruggedness. The waveguide is offered to cover the frequency range of 26.5 to 40 GHz.



Mechanical Specifications:

Item	Specification
Waveguide Size	WR-28 Waveguide with UG-599/U Flange
Insertion Length	1.0"
Flange Material	Brass
Waveguide Material	Copper
Finish	Gold Plated
Weight	1.0 Oz
Outline	WG-FA-L

ECCN

EAR99

FEATURES

- Frequency Range: 26.5 to 40 GHz
- Rugged Waveguide Configuration
- Low Insertion Loss

APPLICATIONS


- Test Instrumentation
- Sub-assemblies

SUPPLEMENTAL DETAILS



SWG-28010-FB

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

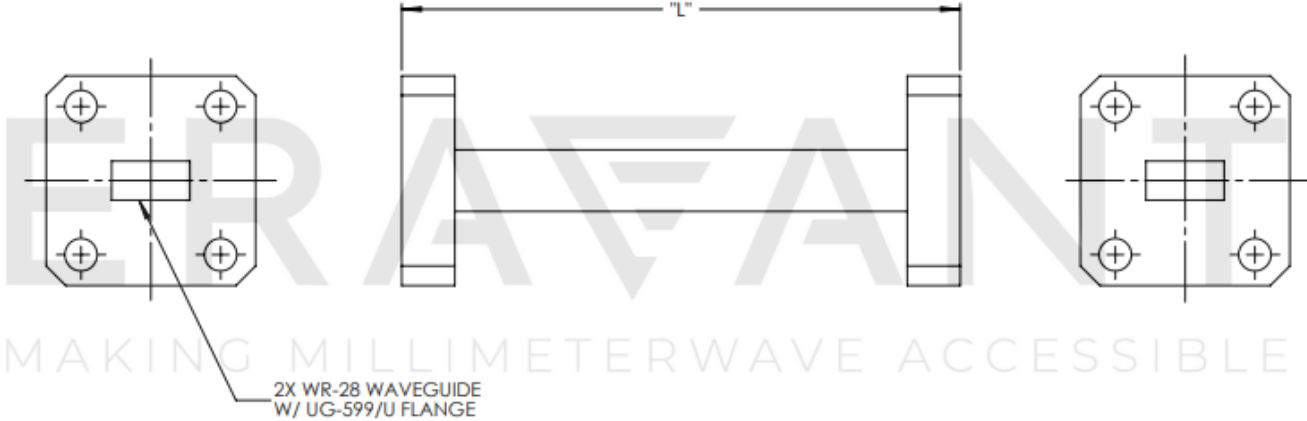

NOTE:

- Eravant reserves the right to change the information presented without notice.

CAUTION:

- If a waveguide is present, any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.
- For 1 mm connectors proper torque should be applied: 4.0 ± 0.15 inch-pounds (0.45 ± 0.02 Nm). Torque wrench model [SCH-06004-S1](#) is highly recommended.
- For 1.35 mm, 1.85 mm, 2.4 mm, 2.92 mm, and SMA connectors proper torque should be applied: 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm). Torque wrench model [SCH-08008-S1](#) is highly recommended.