

WR-22 Waveguide Spacer, 138 Mils, 3/8 λ g

Description:

SWI-22138-SB-WP is a 0.138" thick, 3/8 wavelength, instrumentation grade Q Band waveguide spacer (shim) with WR-22 window and UG-383/U circular flange. The spacer is manufactured with a precision machining process to ensure high quality and ruggedness. The spacer is offered to cover the frequency range of 33 to 50 GHz.



Features:

- Frequency Range: 33 to 50 GHz
- 3/8 Wavelength
- Low Insertion Loss
- Instrumentation Grade


Applications:

- Module Tuning
- Sub-assemblies
- Mechanical Fitting
- VNA Calibration

Mechanical Specifications:

Item	Specification
Waveguide Size	WR-22 Waveguide with UG-383/U Flange
Material	Brass
Finish	Gold Plated
Weight	0.7 Oz
Insertion Length	0.138"(L)
Outline	WI-QL

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

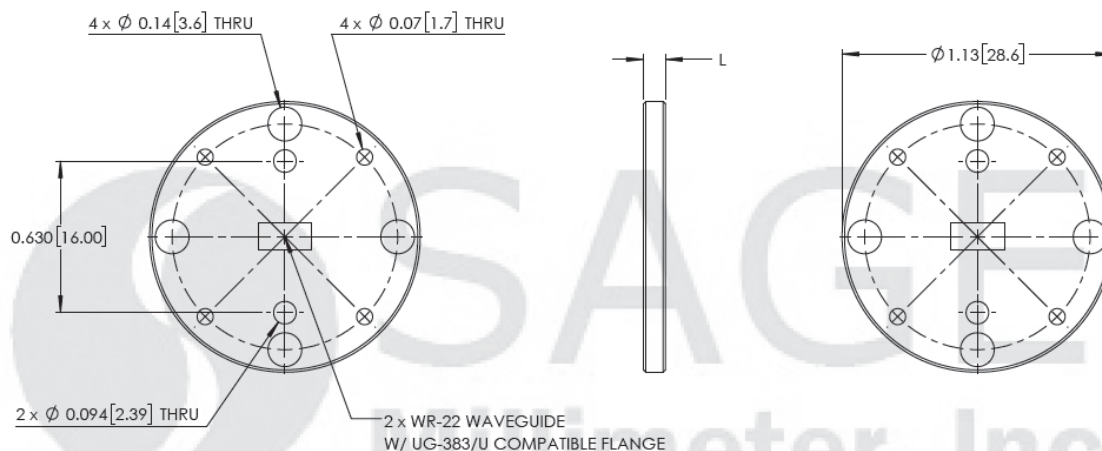

Note:

- Length "L" is customizable.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.



www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505
Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com