

## SWL-1527-S1

### V-Band Waveguide Termination Load, 0.5 Watts

**SWL-1527-S1** is a low power, V-Band termination load that covers the frequency range of 50 to 75 GHz. The termination load exhibits a typical return loss of 32 dB. It is designed and manufactured to offer a good match for system applications. Custom levels of power handling are available under different model numbers.



#### Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	50 GHz		75 GHz
Return Loss		32 dB	
Power Handling		0.5 W (CW)	2 W (CW)
Specification Temperature		+25°C	
Operating Temperature	-40°C		+85°C

#### Mechanical Specifications:

Item	Specification
RF Ports	WR-15 Waveguide with UG-385/U Anti-Cocking Flange
Waveguide Material	Brass
Finish	Gold Plated
Weight	0.8 Oz
Outline	WL-VL-A

#### ECCN

EAR99

#### FEATURES

- Full Waveguide Band Coverage
- High Return Loss
- Instrumentation Grade

#### APPLICATIONS


- Test Lab
- Instrumentations
- Sub-assemblies

#### SUPPLEMENTAL DETAILS




## SWL-1527-S1

### Typical Return Loss vs. Frequency

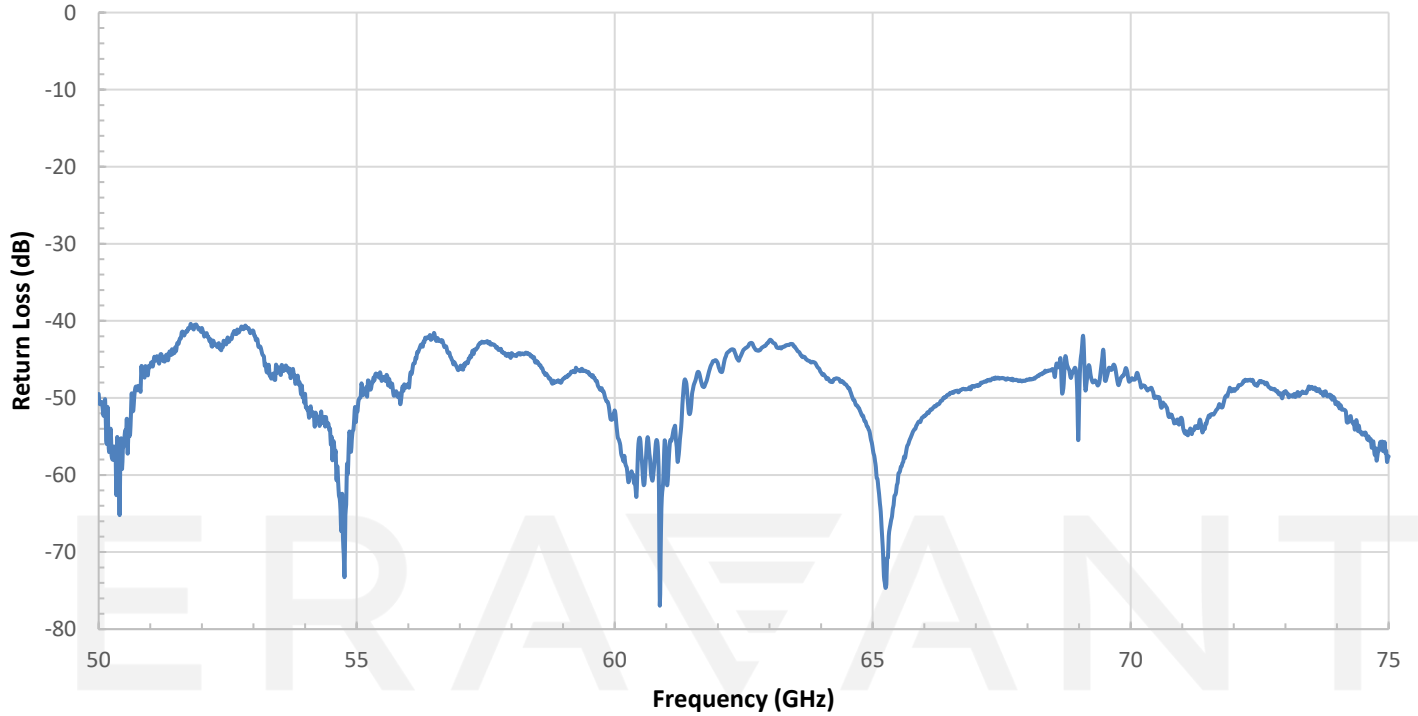

**Mechanical Outline:** (Unless otherwise specified, all dimensions are in inches [millimeters])

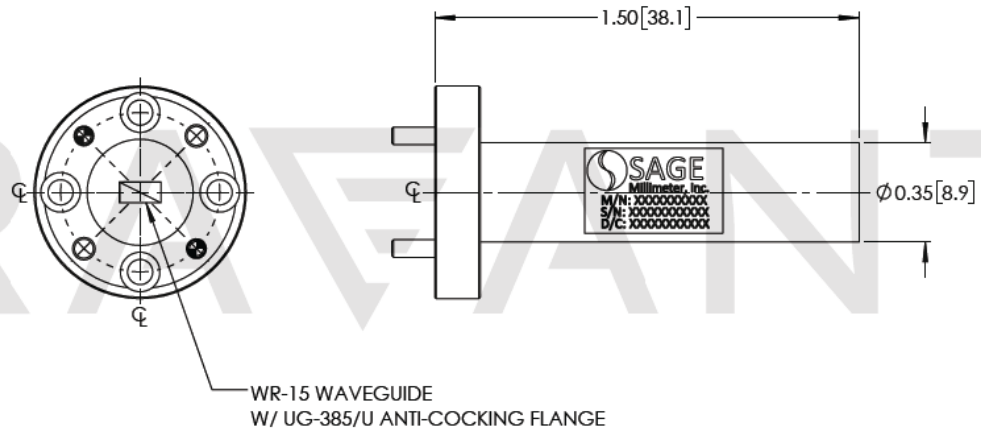

MAKING MILLIMETERWAVE ACCESSIBLE

**NOTE:**

- On condition that test data is provided it is collected from a sample lot. Actual data may vary slightly from unit to unit. All testing is performed under +25 °C room temperature.
- Eravant reserves the right to change the information presented without notice.

**CAUTION:**

- Exceeding absolute maximum ratings shown will damage the device.
- If a waveguide is present, any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.

ERAVANT  
MAKING MILLIMETERWAVE ACCESSIBLE

ERAVANT  
MAKING MILLIMETERWAVE ACCESSIBLE