



Ka-Band Waveguide Termination Load, 1.5 Watts

Description:

Model SWL-2832-S1 is a low power, Ka-Band termination load that covers the frequency range of 26.5 to 40 GHz. The termination load exhibits a typical VSWR of 1.04:1. It is designed and manufactured to offer a good match for system applications. Custom levels of power handling are available under different model numbers.



Features:

- Full Waveguide Band Coverage
- Low VSWR
- Instrumentation Grade

Applications:

- Test Lab
- Instrumentations
- Sub-assemblies

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	26.5 GHz		40.0 GHz
VSWR		1.04:1	
Power Handling		1.5 W (CW)	2.0 W (CW)
Specification Temperature		+25°C	
Operating Temperature	-40°C		+85°C

Mechanical Specifications:


Item	Specification
Waveguide	WR-28 Waveguide
Flange	UG-599/U Flange
Size	2.00" (L) x 0.75" (H) x 0.75" (W)
Waveguide Material	Brass
Finish	Gold Plated
Weight	0.8 Oz
Outline	WL-AL






Ka-Band Waveguide Termination Load, 1.5 Watts

Typical Return Loss vs. Frequency

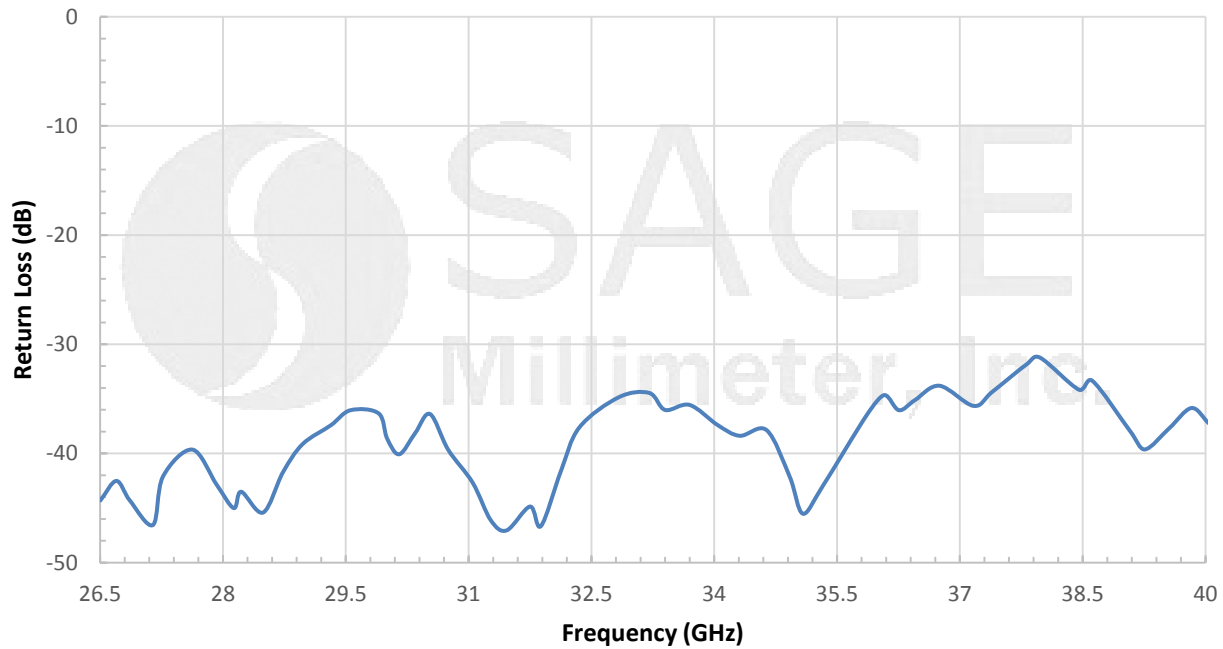

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches)

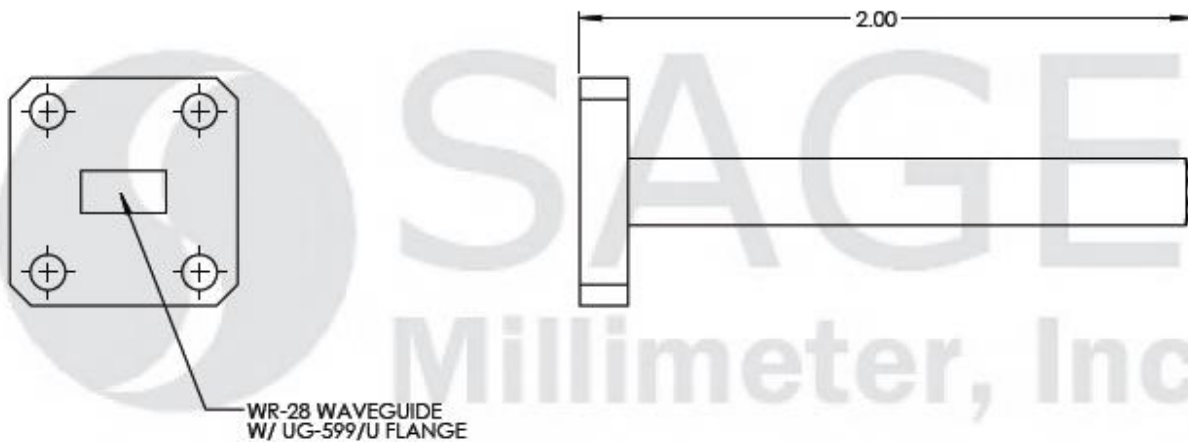

Note:

- All data are presented using a limited sample lot. Actual data may vary unit to unit.
- All testing was performed under 25°C case temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Any foreign objects in the waveguide will degrade performance and/or damage the device.

