

## Ka-Band Waveguide Termination Load, 500 Watts

### Description:

**Model SWL-2857-S8-2** is a high power, Ka-Band termination load that covers the frequency range of 26.5 to 40 GHz. The termination load exhibits a typical return loss of 22 dB and 500 Watts power handling capacity. It is designed and manufactured to offer a good match for high power test lab and system applications. Custom levels of power handling are offered under different model numbers.



### Features:

- Full Waveguide Band Coverage
- High Return Loss
- Instrumentation Grade

### Applications:

- Test Lab
- Instrumentations
- Sub-assemblies

### Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	26.5 GHz		40 GHz
Return Loss		22 dB	
Power Handling			500 W (CW)
Specification Temperature		+25 °C	
Operating Temperature	-40 °C		+85 °C


### Mechanical Specifications:

Item	Specification
RF Port	WR-28 Waveguide with UG-599/U-M Flange
Waveguide Material	Brass
Waveguide Finish	Gold Plated
Heat Sink Material	Aluminum
Heat Sink Finish	Black Anodized
Weight	5.2 lbs.
Outline	WL-AH-500-SX2




## Ka-Band Waveguide Termination Load, 500 Watts

### Typical Return Loss vs. Frequency

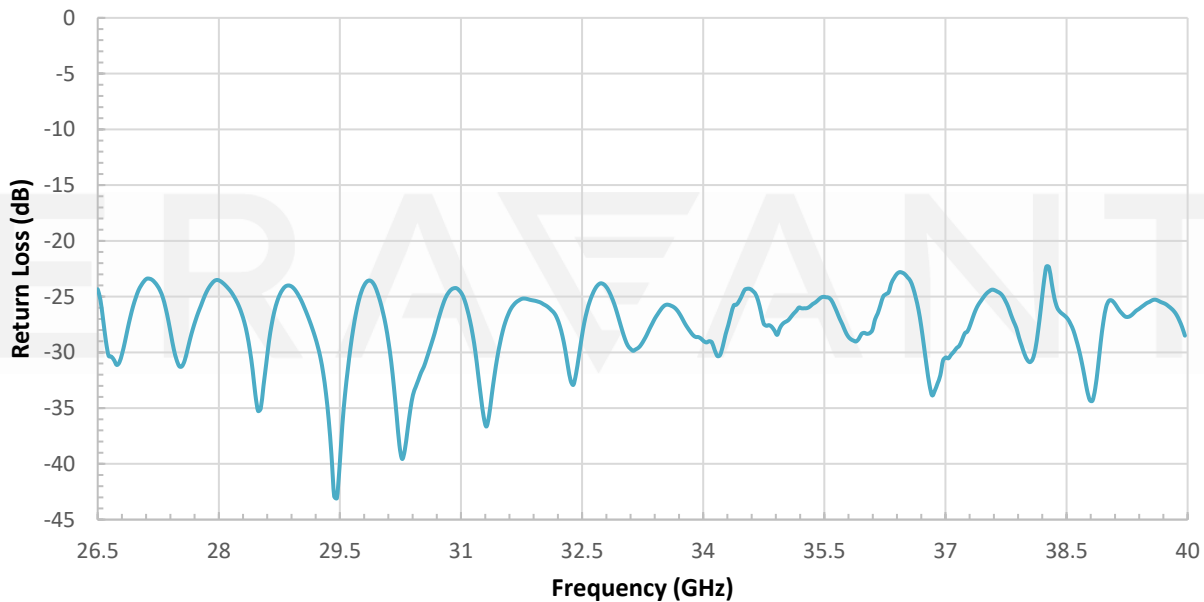

**Mechanical Outline:** (Unless otherwise specified, all dimensions are in inches [millimeters])

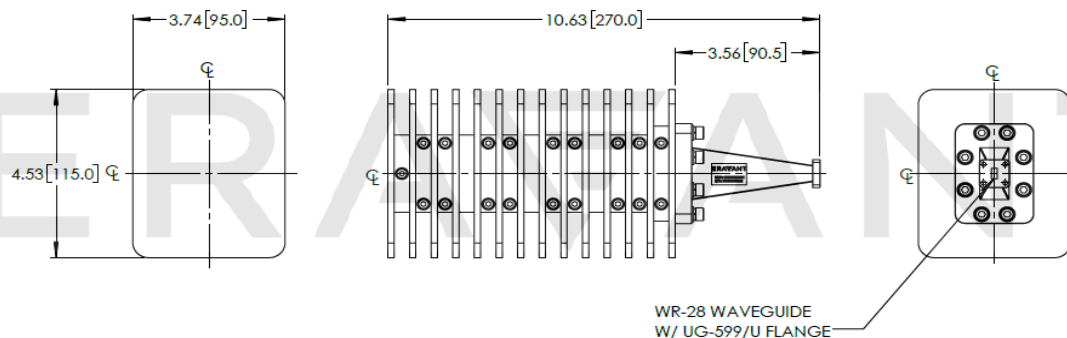

#### Note:

- Return loss data presented was measured under low power conditions (0 dBm). Actual return loss under high power conditions will be worse than what is shown on the plot.
- All data are presented using a limited sample lot. Actual data may vary unit to unit.
- All testing was performed under 25°C case temperature.
- Eravant reserves the right to change the information presented without notice.

#### Caution:

- Exceeding absolute maximum ratings shown will damage the device.
- Any foreign objects in the waveguide will cause performance degradation and possible device damage.



www.eravant.com | 501 Amapola Ave, Torrance, CA 90501  
Phone: 424-757-0168 | Fax: 424-757-0188 | Email: support@eravant.com