

K-Band Waveguide Termination Load, 2 Watts

Description:

Model SWL-4233-S1 is a low power, K-Band termination load that covers the frequency range of 18 to 26.5 GHz. The termination load exhibits a typical return loss of 30 dB. It is designed and manufactured to offer a good match for system applications. Custom levels of power handling are available under different model numbers.



Features:

- Full Waveguide Band Coverage
- High Return Loss
- Instrumentation Grade

Applications:

- Test Lab
- Instrumentations
- Sub-assemblies

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	18 GHz		26.5 GHz
Return Loss		30 dB	
Power Handling		2 W (CW)	3 W (CW)
Specification Temperature		+25°C	
Operating Temperature	-40°C		+85°C


Mechanical Specifications:

Item	Specification
RF Port	WR-42 Waveguide with UG-595/U Flange
Material	Brass
Finish	Gold Plated
Weight	1.2 Oz
Outline	WL-KL




K-Band Waveguide Termination Load, 2 Watts

Typical Return Loss vs. Frequency

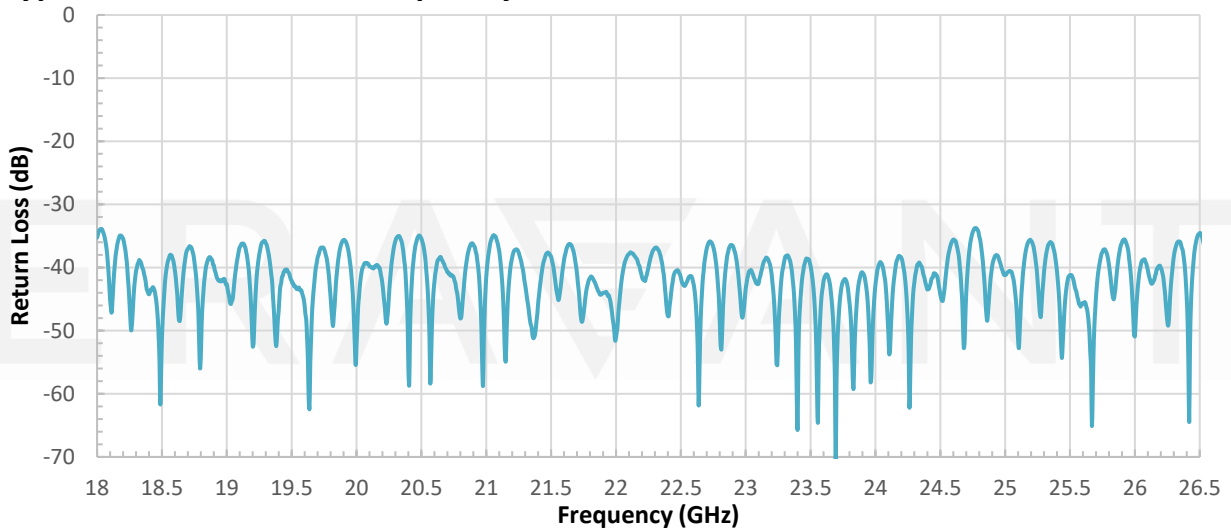

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

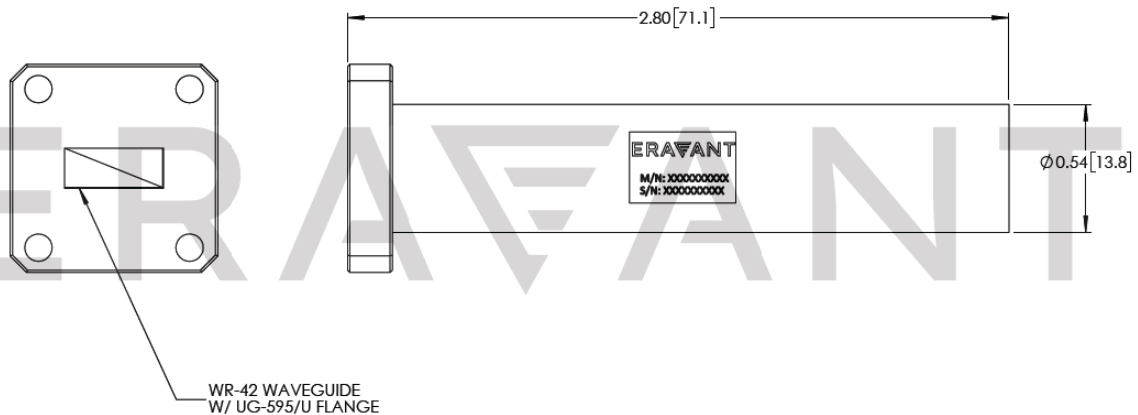

Note:

- All data are presented using a limited sample lot. Actual data may vary unit to unit.
- All testing was performed under 25°C case temperature.
- Eravant reserves the right to change the information presented without notice.

Caution:

- Exceeding absolute maximum ratings shown will damage the device.
- Any foreign objects in the waveguide will cause performance degradation and possible device damage.

